




YAMA

PARTS

YAMAHA

125 YAS1

RIDERS MANUAL

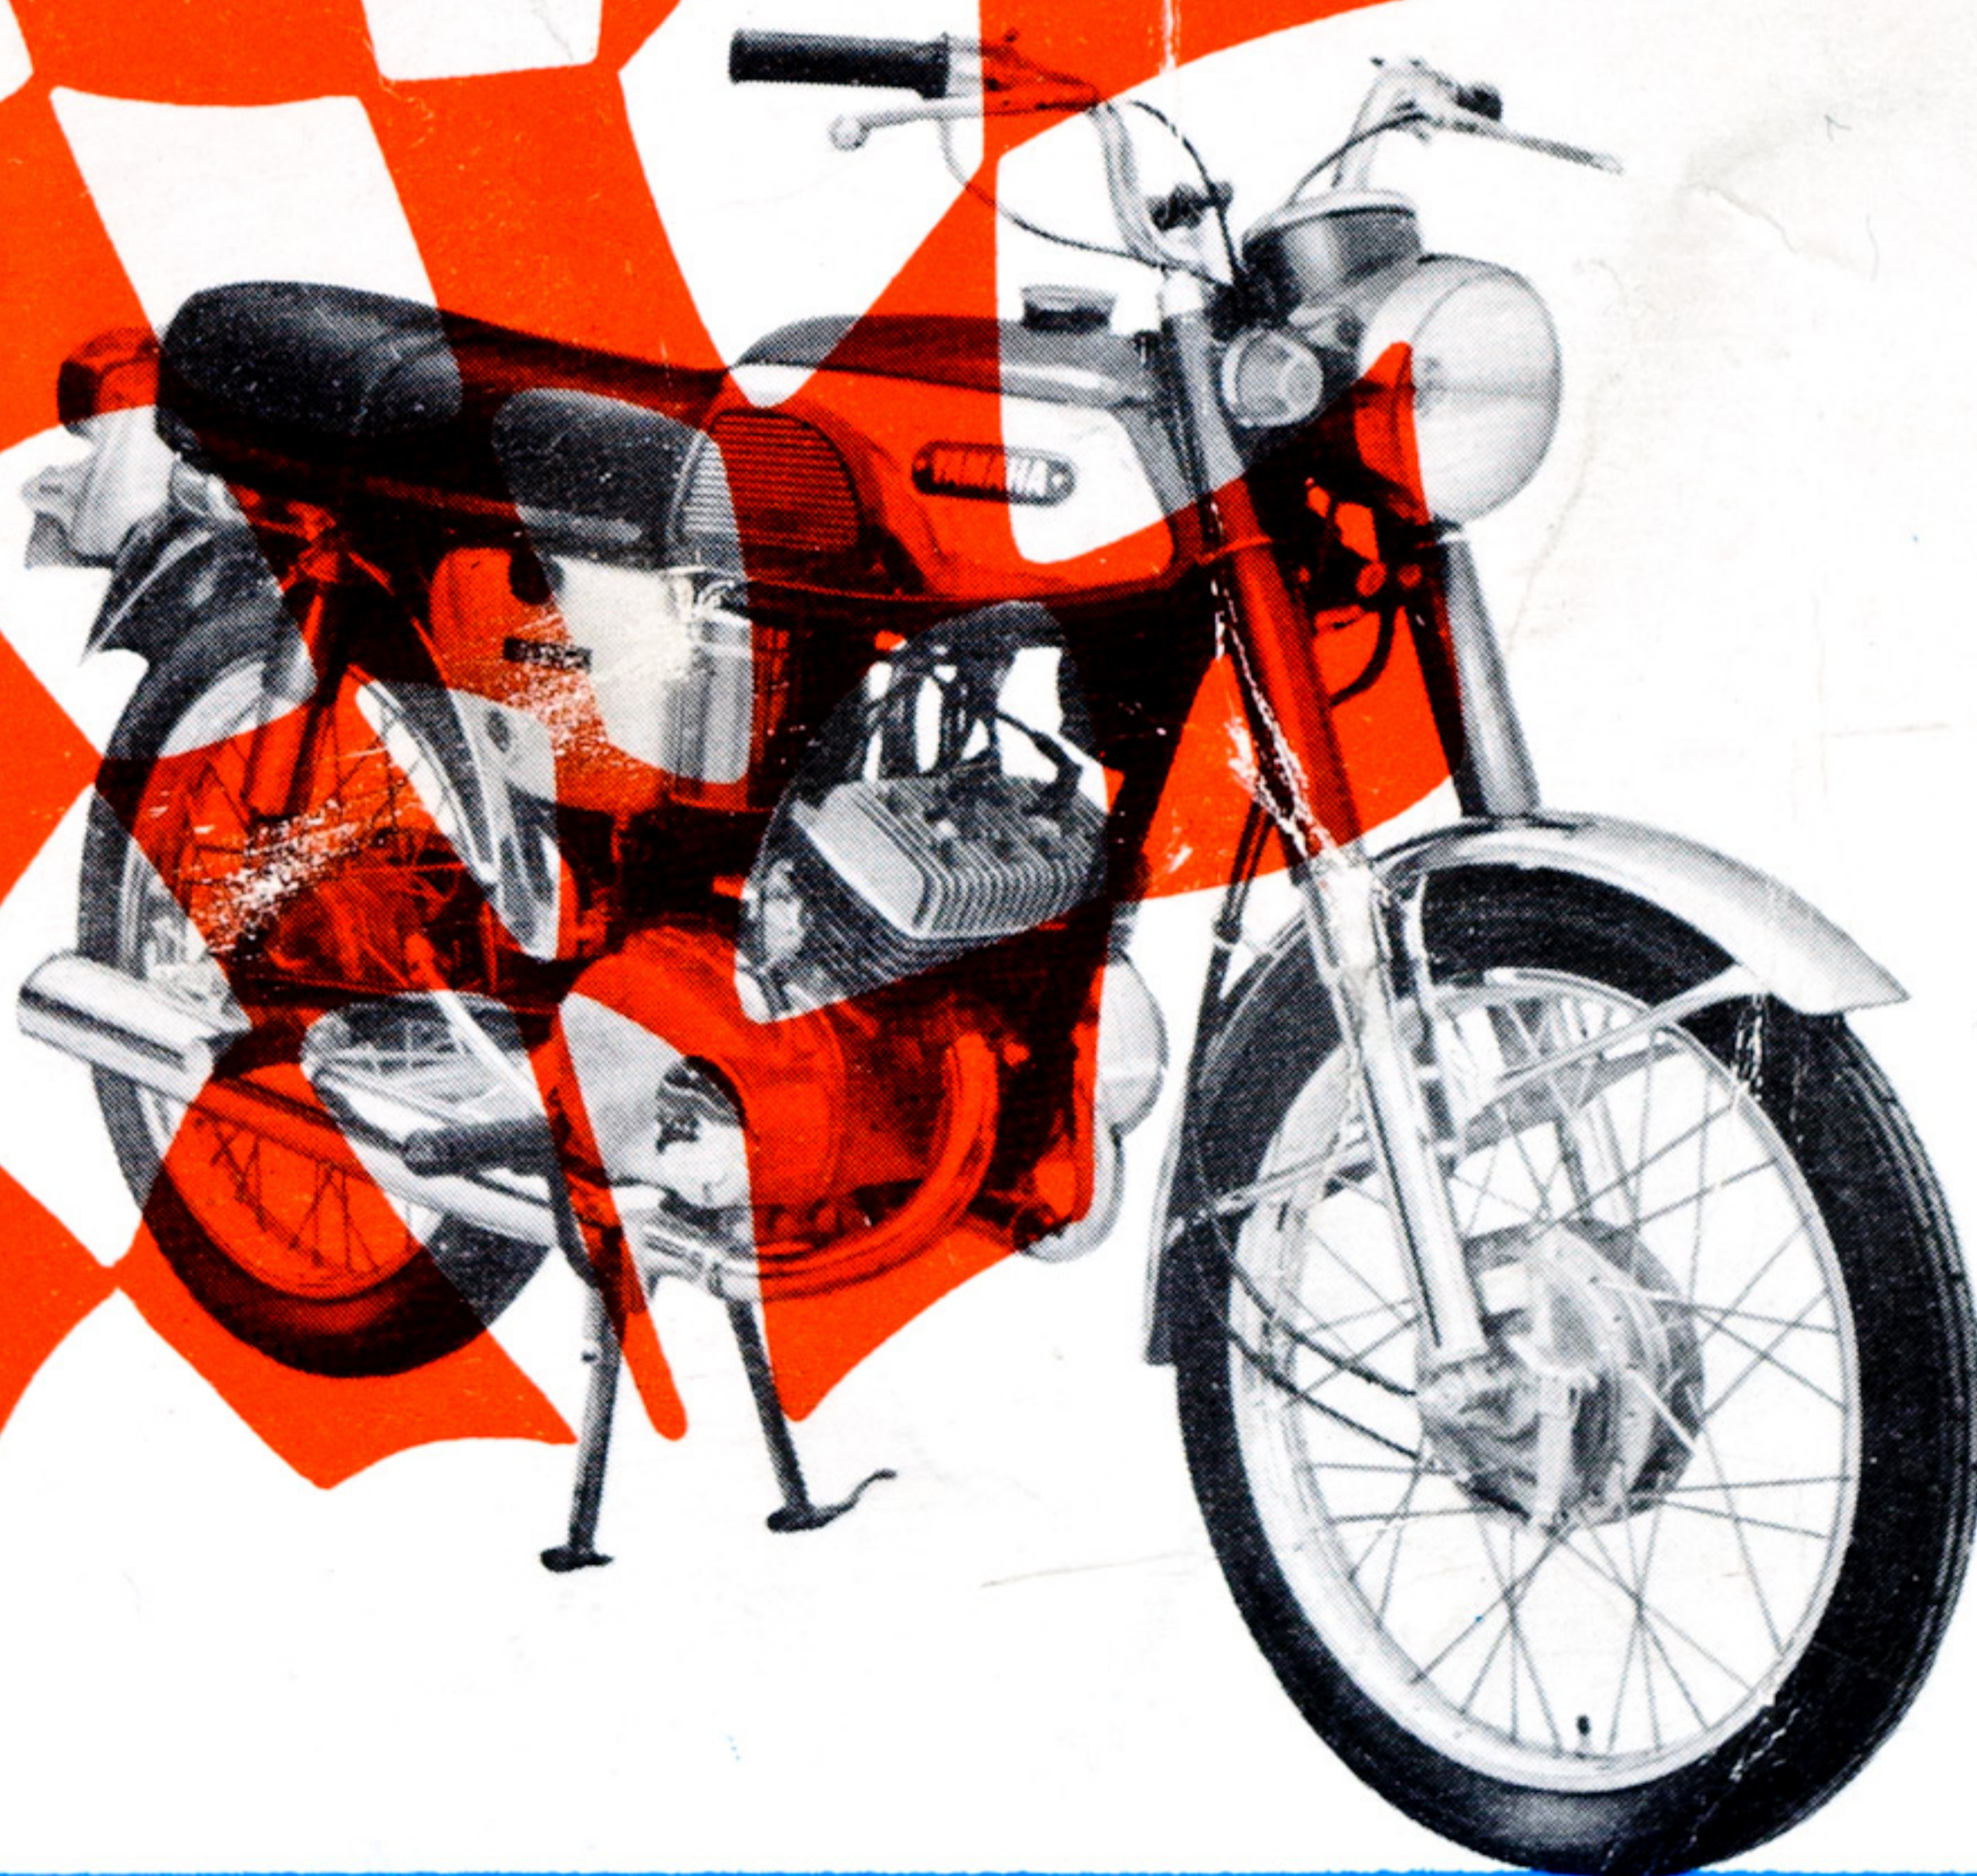


YAMAHA MOTOR CO., LTD.

Congratulations. You are now the owner of a new Yamaha YAS1. The YAS1 is a high-performance, motorcycle manufactured by the leading manufacturer of motorcycles in Japan.

The YAS1, the newest of the Yamaha line model is designed for competition and high-speed road use. It features a rugged, powerful 2-cycle twin engine and Auto Lube, the revolutionary lubricating system developed by Yamaha Technical Research Laboratory and proved in all Yamaha models.

This manual explains some steps necessary for operating and caring for your new motorcycle. Please read it carefully to become thoroughly familiar with all features and advantages built into your YAS1.

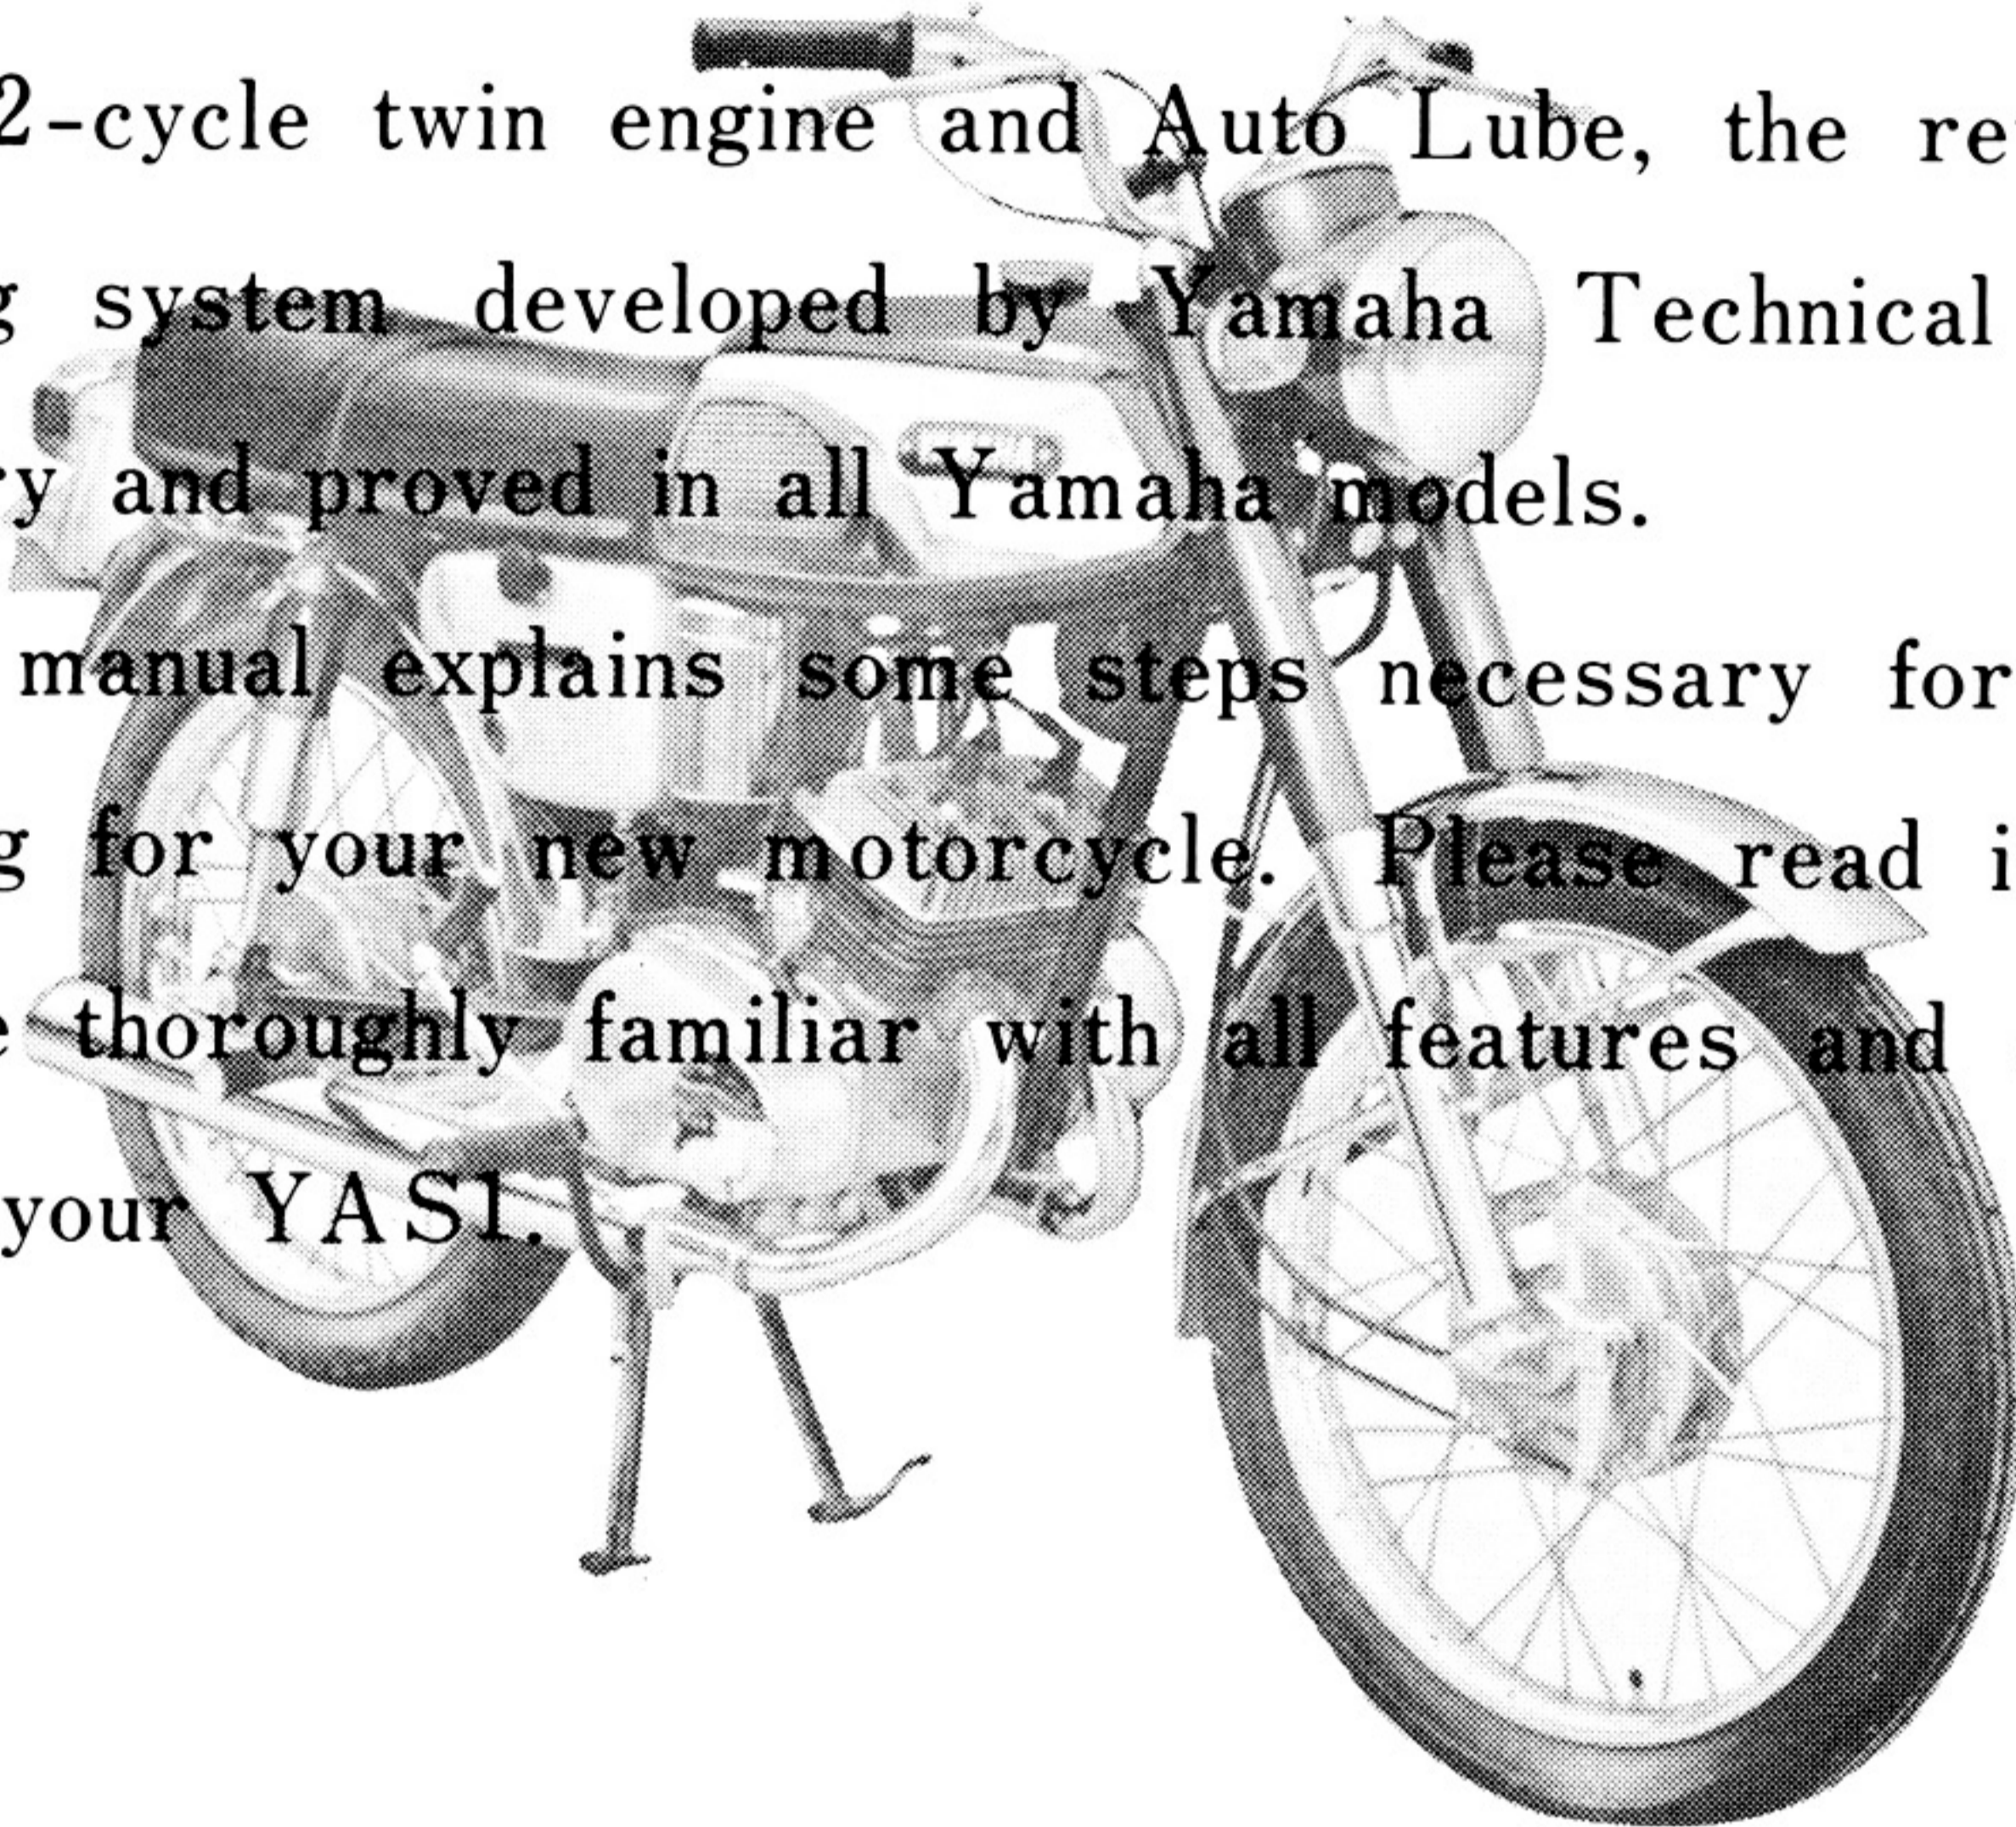

CONTENTS

1	Special features and specifications	3
1-1	Special features	3
1-2	Specifications	4
2	What is Yamaha Auto Lube ?	6
3	Main parts	8
4	Operating Instructions	13
4-1	What you should know before operating	13
4-1-1	Gasoline and Oil	13
4-1-2	Main switch	14
4-1-3	Fuel cock	15
4-1-4	Handlebar switch & Horn button	15
4-1-5	Steering lock key	16
4-1-6	Handle damper	16
4-1-7	How to adjust the rear cushion	17
4-2	What you should check before every driving	18
4-3	Starting, Shifting Gears, Stopping and Parking	19
4-3-1	Starting	19
4-3-2	Shifting gears	20
4-3-3	Driving on hills	21
4-3-4	Stopping and Parking	22
4-4	Breaking in period	23
5	How to keep your motorcycle in top condition	24
5-1	Periodical service at Yamaha Dealers	24
5-2	Owner's inspection	25
5-2-1	Daily inspection	25
5-2-2	Periodical inspection	25
5-3	Service tools and their use	26
5-3-1	Service tools	26
5-3-2	Use of the service tools	27
	Brakes	27
	Clutch	29
	Gear oil	30
	Battery	31
	Spark plug	32
	Air cleaner	33
	Carburetor	34
	Drive chain	35
	Muffler	36
	Fuel cock filter	37
	Bolts and nuts	37
	Greasing and oiling	37
6	Repair and troubleshooting charts	38
6-1	Yamaha service	38
6-2	Genuine Yamaha parts	38
6-3	If a trouble should occur	39
6-4	Troubleshooting Charts	40

1 Special Features and Specifications

1-1 Special Features

1 Advanced Engine with Auto Lube

This highly sophisticated powerful 2-cycle engine when lubricated with Auto Lube develops 15 bhp at 8,500 rpm. After normal break-in you can expect outstanding acceleration and a top speed of over 120 km/h (75mph)

You can enjoy high-speed touring and competition to the fullest.

2 5-Speed Gearbox

A five speed transmission assures you of plenty of power in any driving situation.

3 Special Twin Carburetors

Starter jets are used in the YAS1's carburetors, and in all other Yamaha motorcycles, to make starting easy even in freezing weather.

4 Reliable Brakes

Both brakes are sealed against dirt and water. This means that your brakes will work well in rain or on dirt roads.

5 Adjustable Rear Suspension

The rear springs can be adjusted to suit changes of road surface, speed and load.

6 Primary Kick System

A primary-coupled kick-starter crank lets you start the engine with the gear change pedal in any position, eliminating the need to shift to neutral before starting in an emergency: simply squeeze the clutch lever and kick the starter.

1-2 Specifications YAS1

Model		YAMAHA YAS1
Dimensions	Overall length	73.0 in. 1,855 mm
	Overall width	26.4 in. 670 mm
	Overall height	39.8 in. 1,010 mm
	Wheelbase	42.2 in. 1,200 mm
	Minimum road clearance	5.9 in. 150 mm
Weight	Dry	98 kgs. 216 lbs.
Performance	Maximum speed	More than 75 m/h (120 km/h)
	Fuel consumption(on paved level road)	65 km/ℓ 150 m/g (at 40 km/h)
	Climbing capacity	22.5°
	Braking distance	(11.5 m/50 km) 38 ft at 30 mph
	Minimum turning radius	
Engine	Model	YAMAHA AS1
	Classification	Air-cooled, 2-cycle gasoline
	Lubricating system	Yamaha Auto Lube: automatic lubrication
	Number of cylinder	2, parallel
	Displacement	124
	Bore Stroke	43×43×2
	Compression ratio	7.0 : 1
	Maximum power	15 HP/8,500 rpm
	Maximum torque	(9.4 ft-lbs/8,000 rpm)
	Starting system	Kick starter
	Ignition system	Battery ignition

Model	YAMAHA YAS1	
Transmission	Primary reduction ratio Secondary reduction ratio Clutch Gear box	74/19=3.894 gear 39/15 (2.600) chain Wet, multiple-disk Constant mesh, 5-speed
Gear ratio	Gear ratio Low Second Third Fourth Top	2.833 (total reduc. ratio 28.7) 1.813 (total reduc. ratio 18.4) 1.300 (total reduc. ratio 13.2) 1.045 (total reduc. ratio 10.6) 0.840 (total reduc. ratio 852)
Body	Frame Front suspension Rear suspension	Diamond-type tube frame Telescopic (coil spring oil damper) Swinging arm (coil spring oil damper)
Steering	Steering angle Caster Trail	47° 63° 86.5 mm 3.4 in.
Brake	Type Front Rear	Internal expanding Right hand operated, cable-actuated Right foot operated, rod-actuated
Tires	Front Rear	2.50-18-4P.R. 2.75-18-4P.R.
Tanks	Gasoline tank capacity Oil tank capacity	9.5 ℓ (8.4qt.) (2.5 gal) 1.5 ℓ (1.6 qt.) (0.4 gal)

2 What is Yamaha Auto Lube?


Auto Lube is the best lubricating system available for 2-cycle engines. It eliminates the need for mixing oil and gasoline. The amount of oil injected into the manifold is controlled by a compact, high-precision oil pump. The plunger pump, driven by the reduction gear has its displacement controlled by the throttle opening.

The rate of injection varies with engine speed and load as indicated by throttle opening. Because of the wide range of control Auto Lube offers, precisely the right amount of oil is available at all times.


Auto Lube eliminates a number of major problems unavoidable with pre-mix lubrication. This means both improved performance and reliability.


Yamaha Auto Lube Features:


1. Oil consumption is greatly reduced.
2. More effective lubrication results because the oil enters the engine in larger size droplets.
3. There is much less unwanted carbon deposited on the spark plugs, cylinder heads, pistons and exhaust system!
4. There is much less exhaust smoke.
5. Refueling is simplified.
6. Because poor quality oils can easily be avoided, and because the possibility of mismeasuring or inadequately mixing fuel is eliminated, Auto Lube offers completely consistent lubrication.

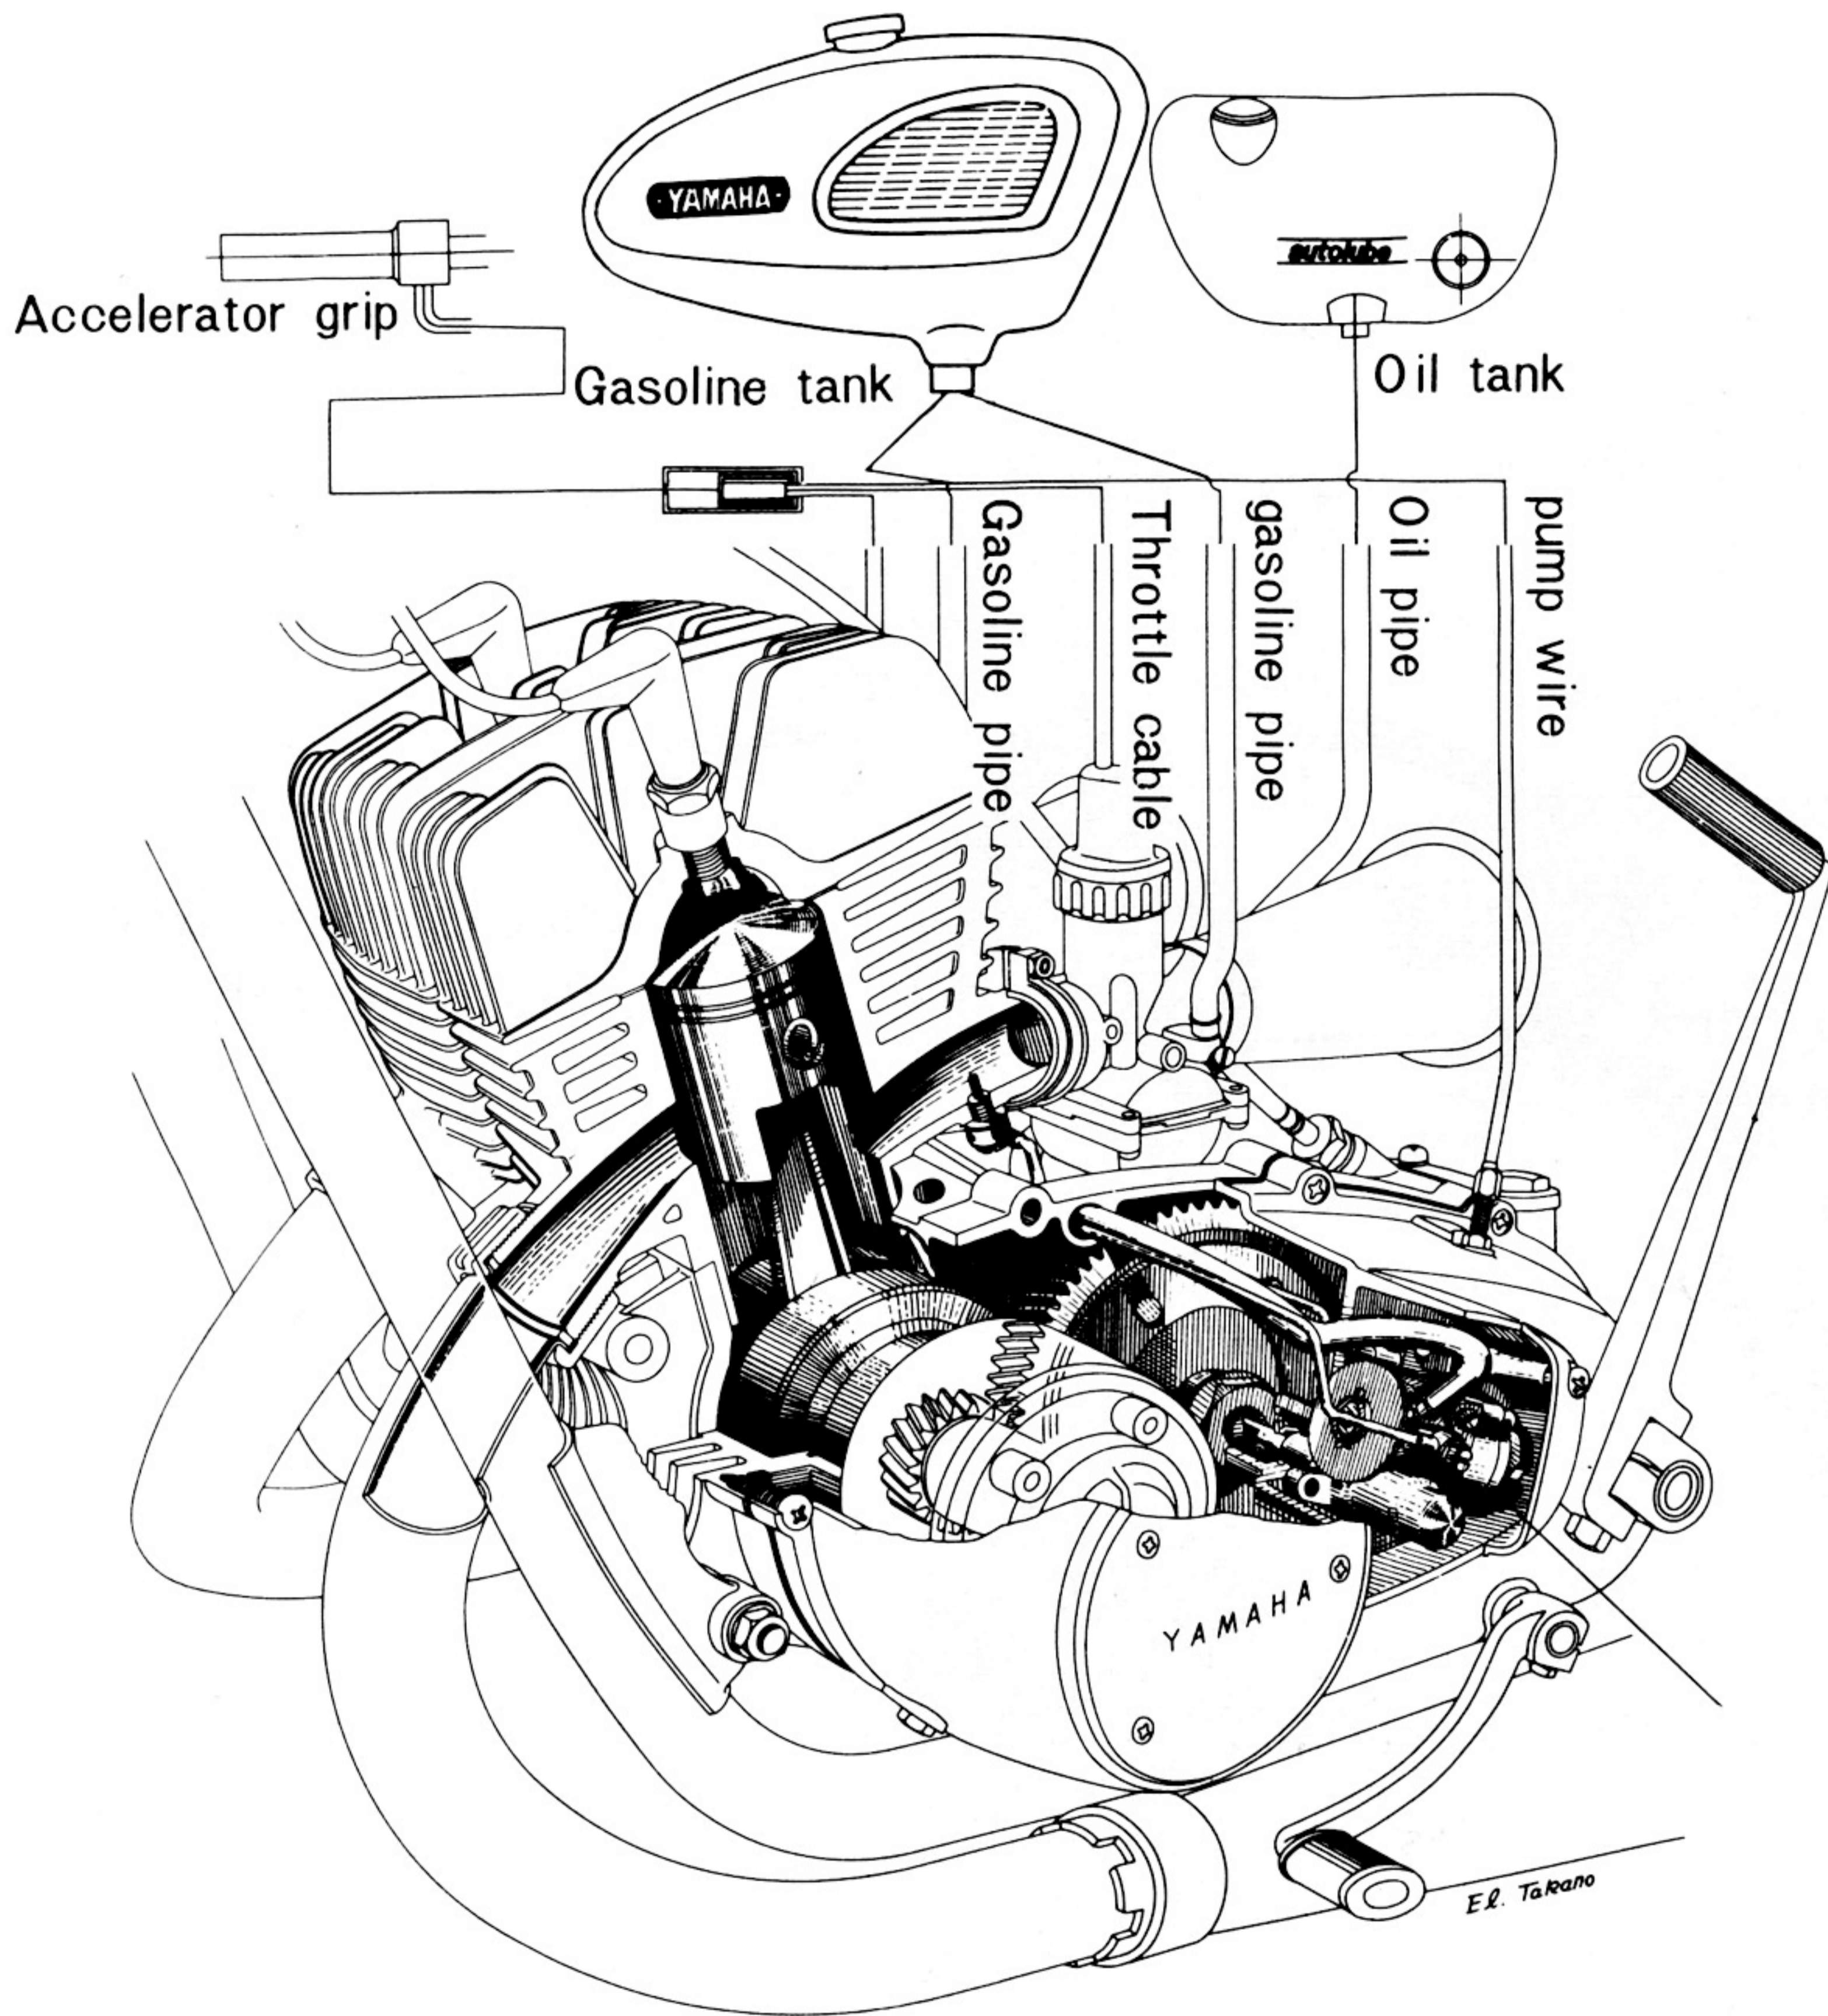

3 Main Parts

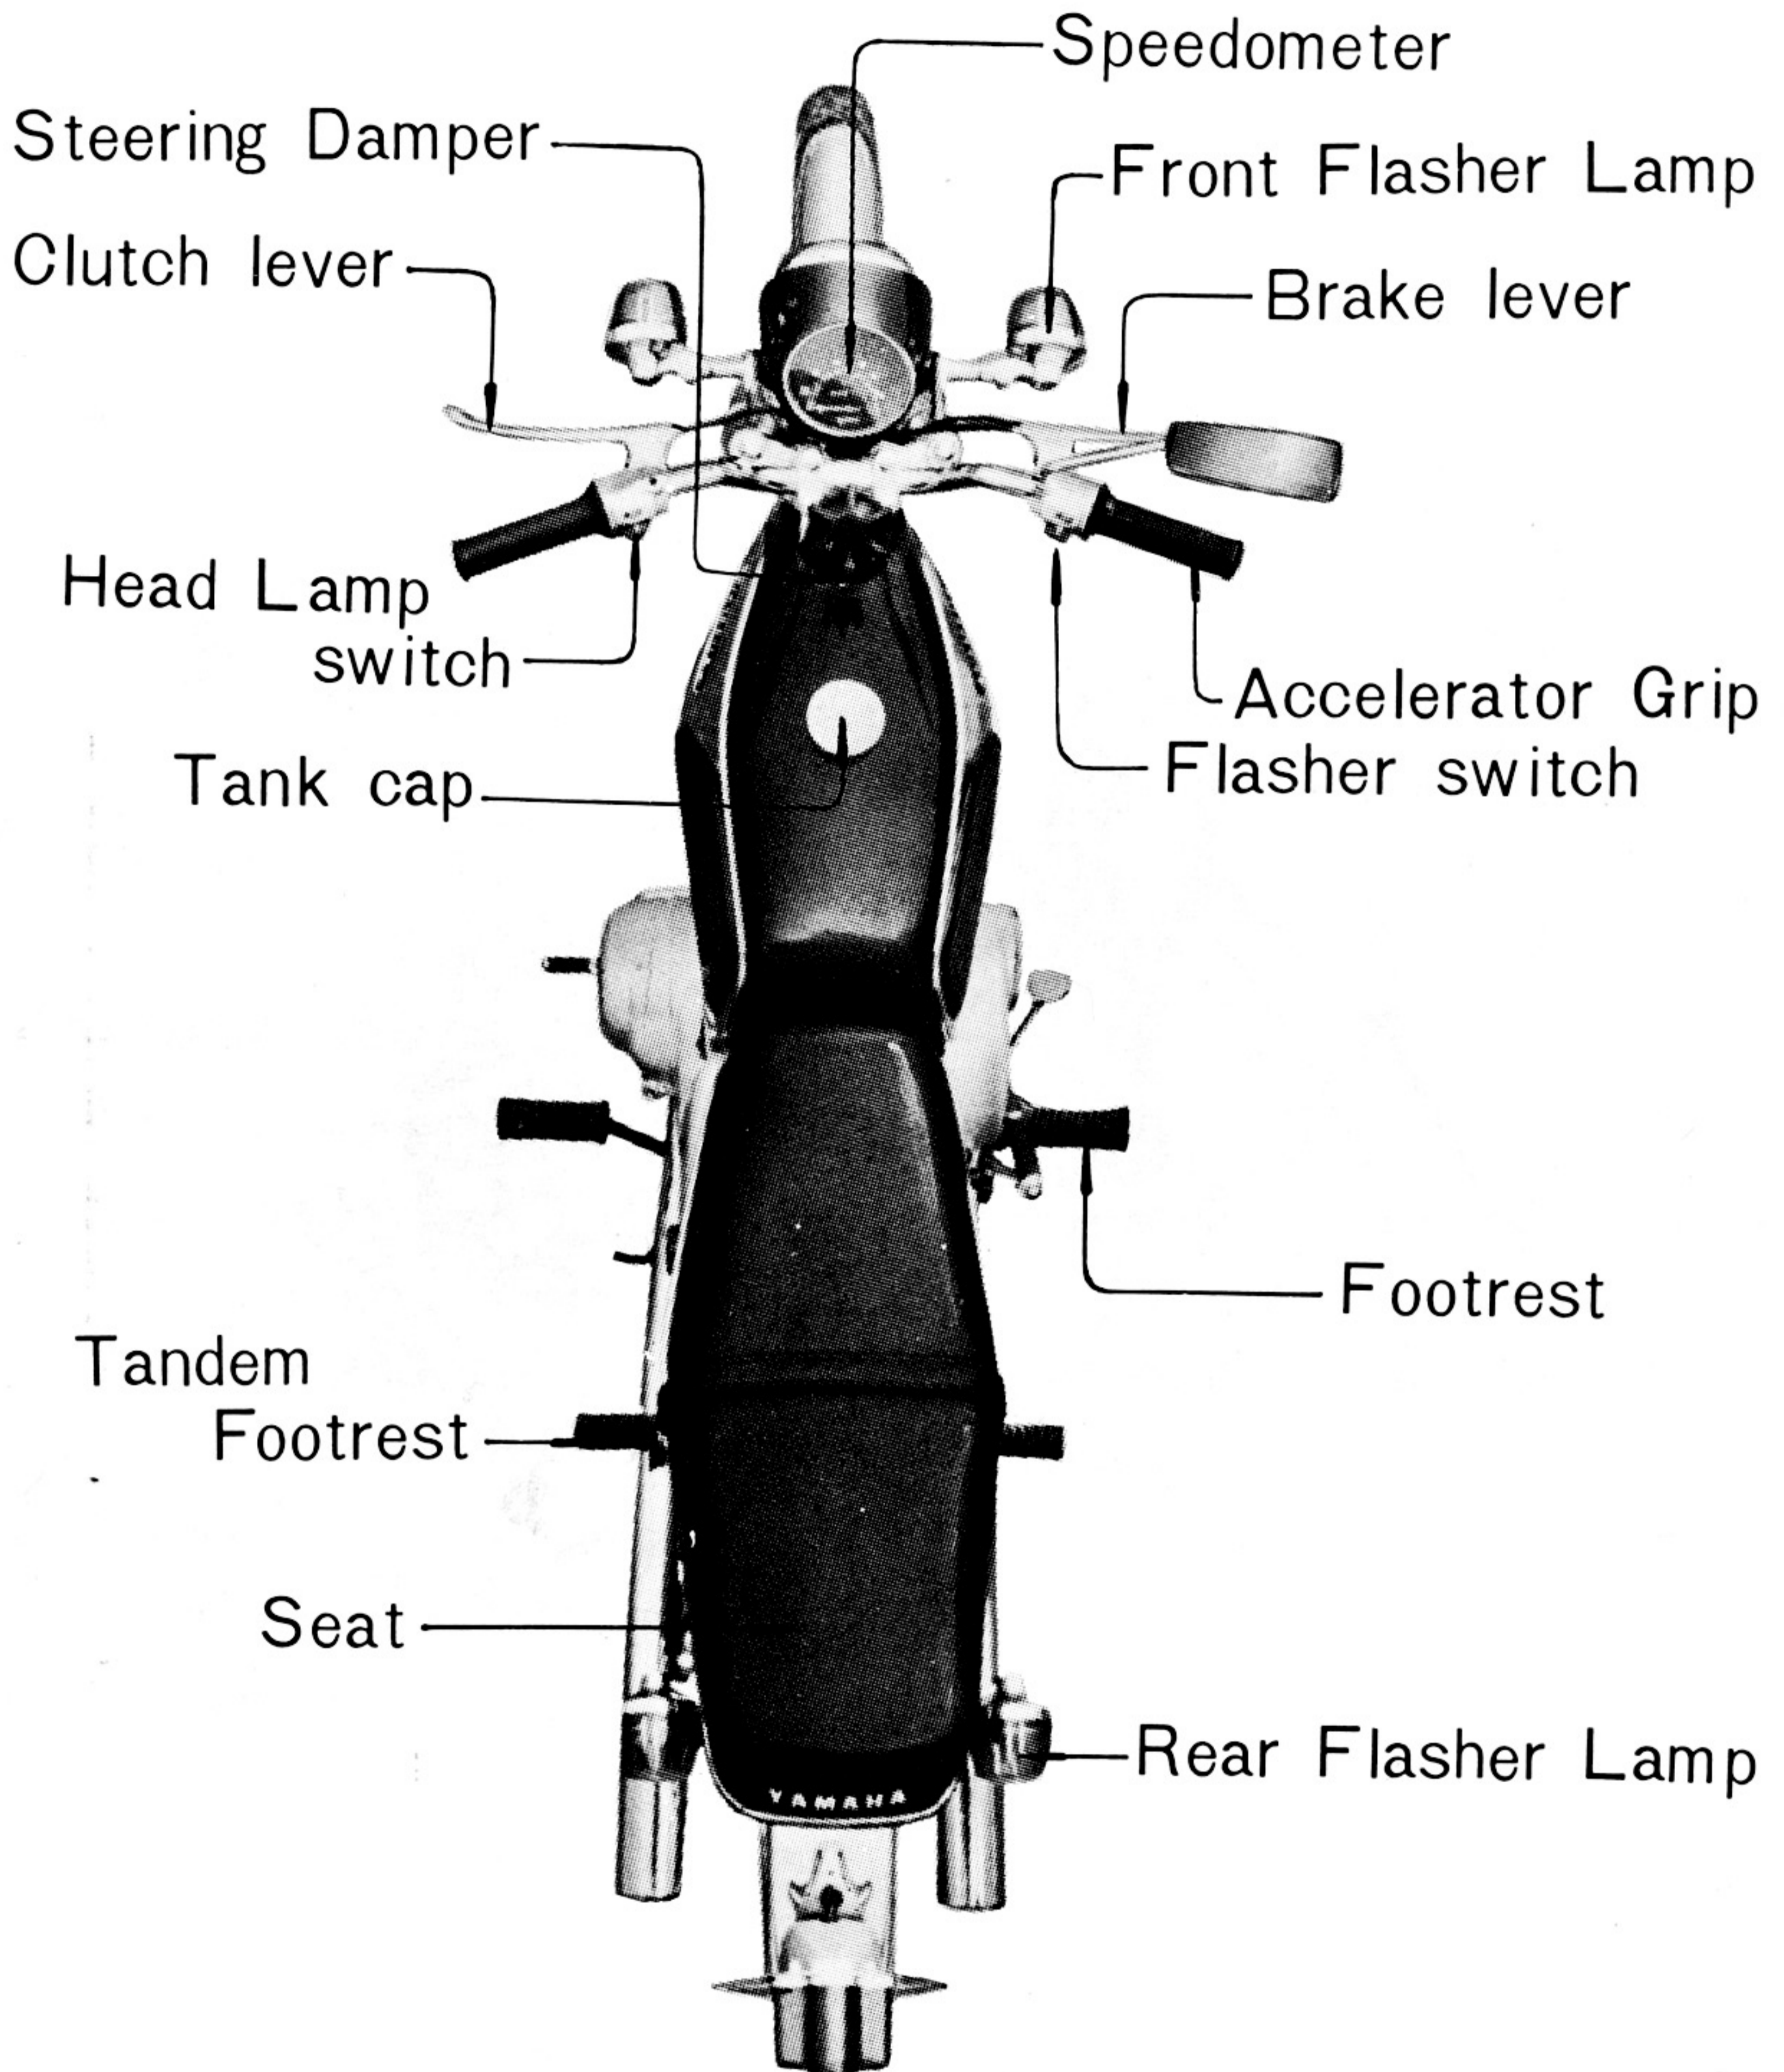

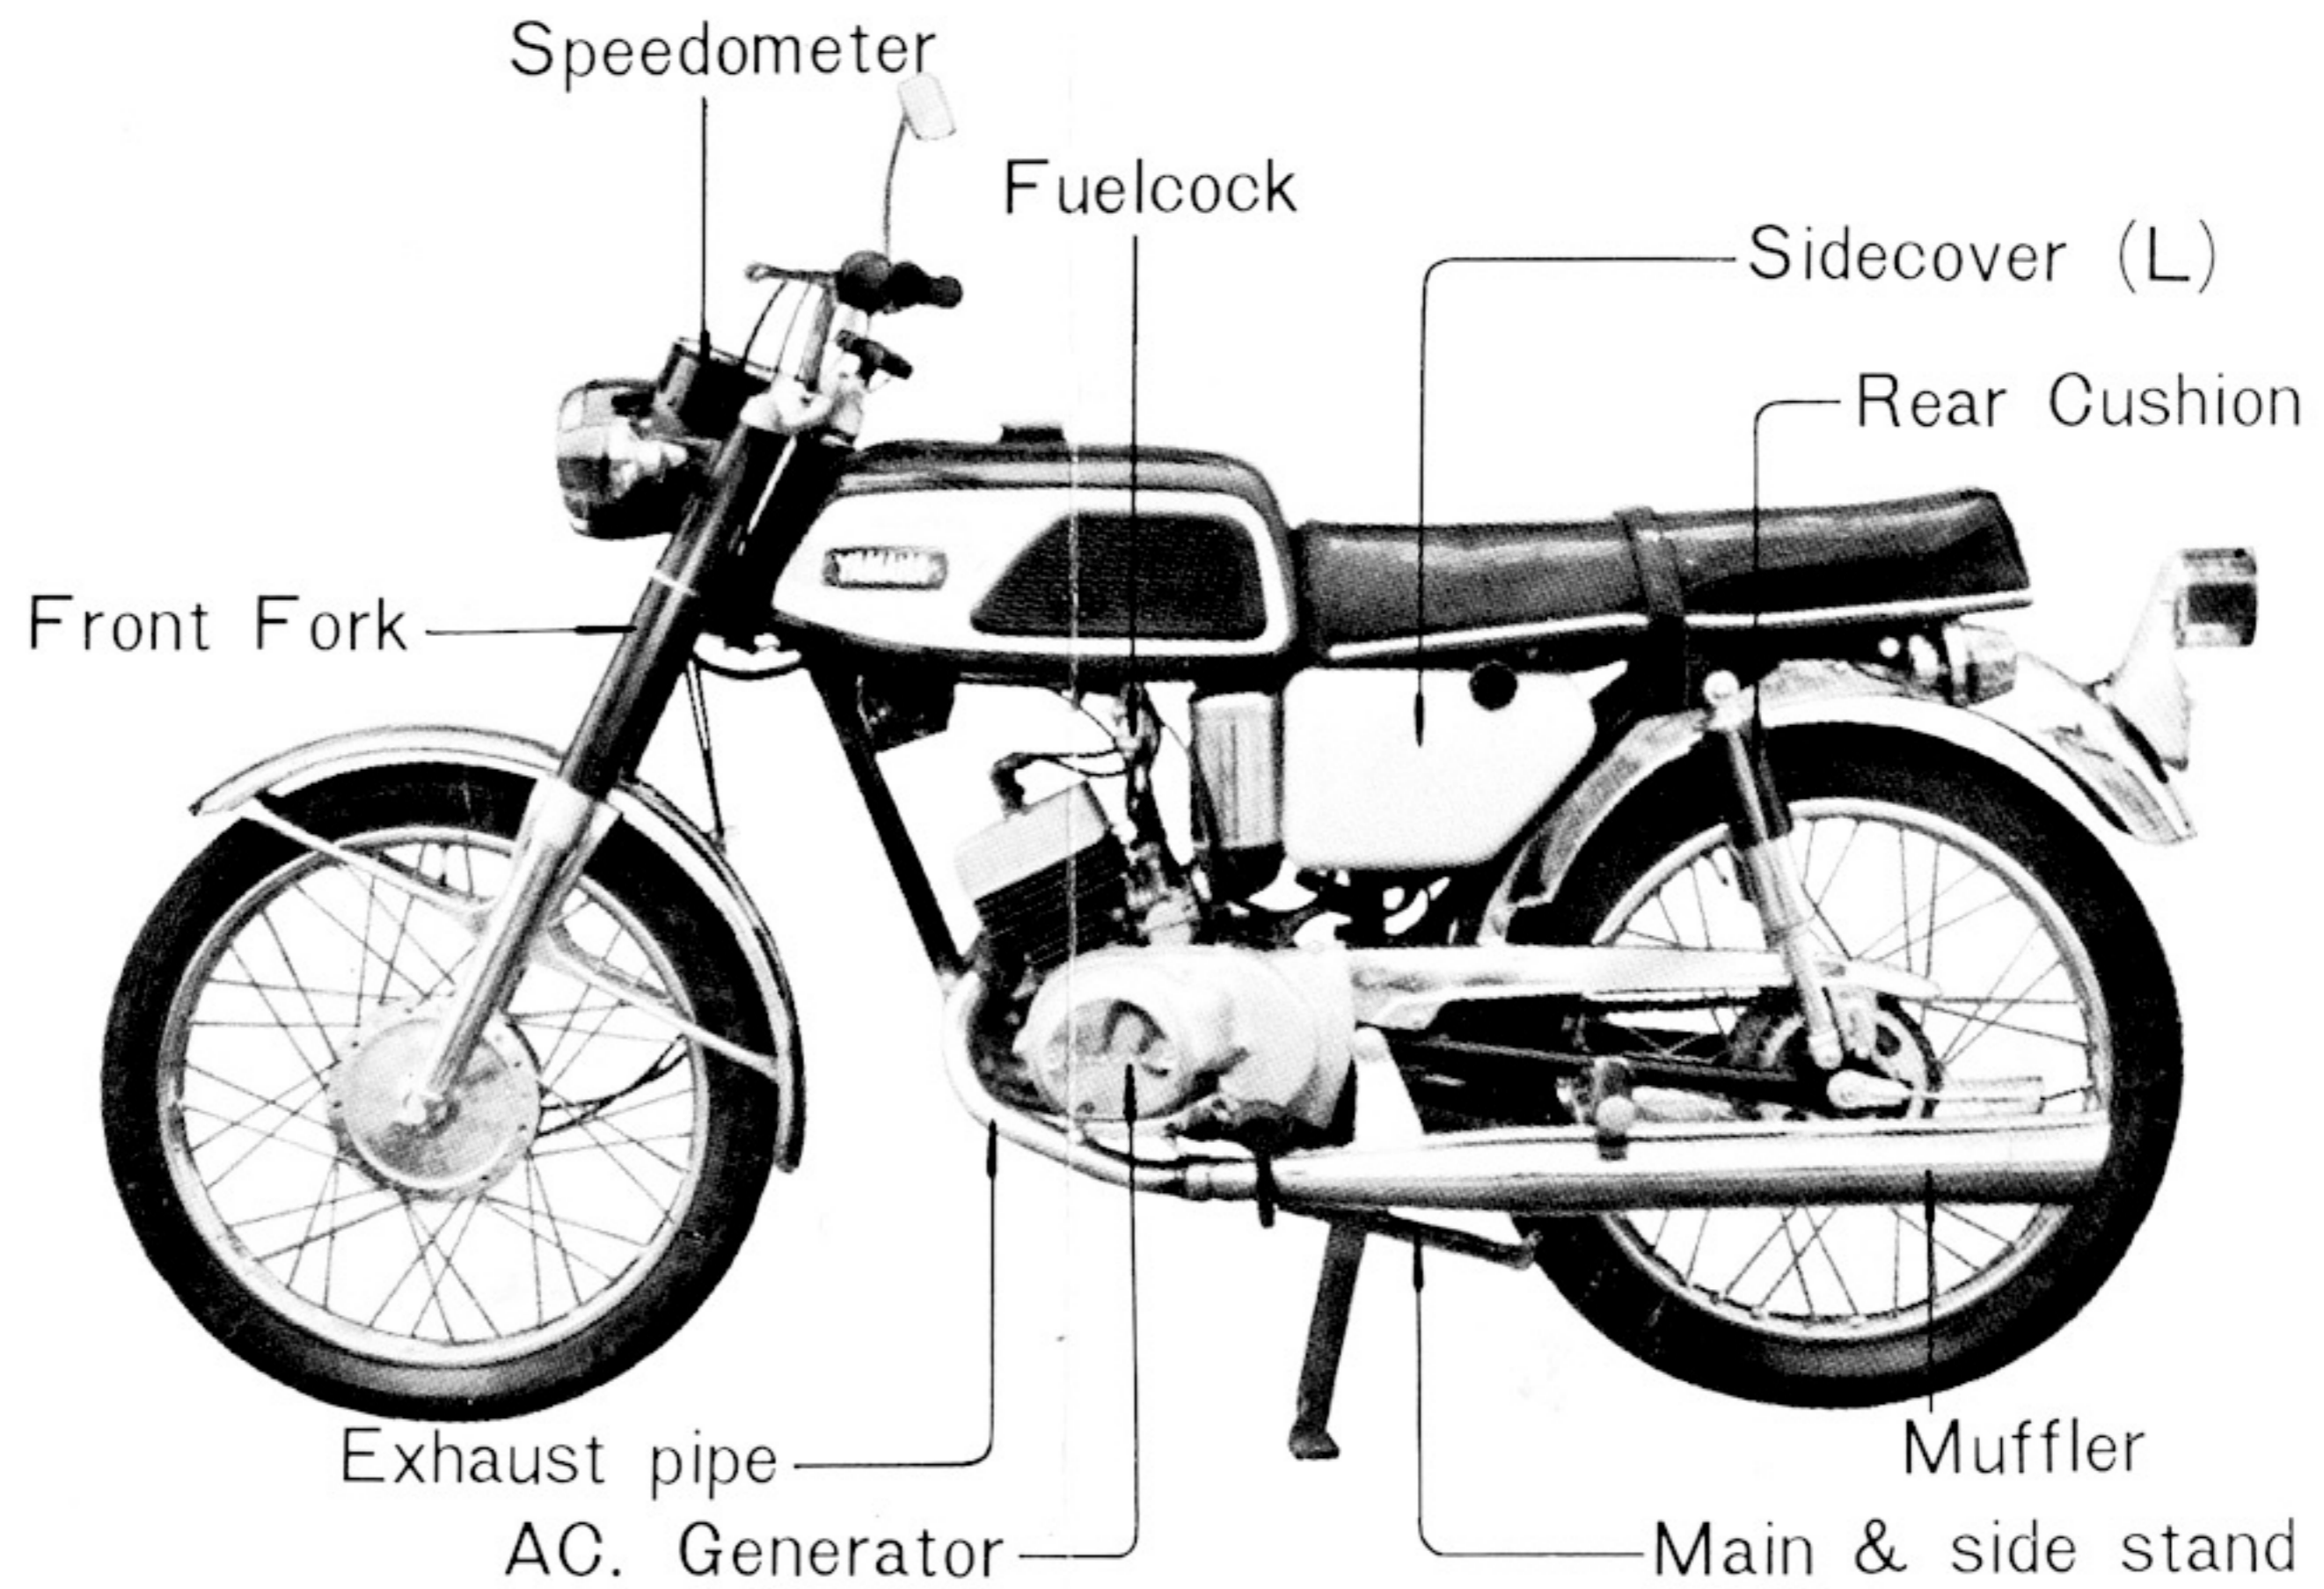

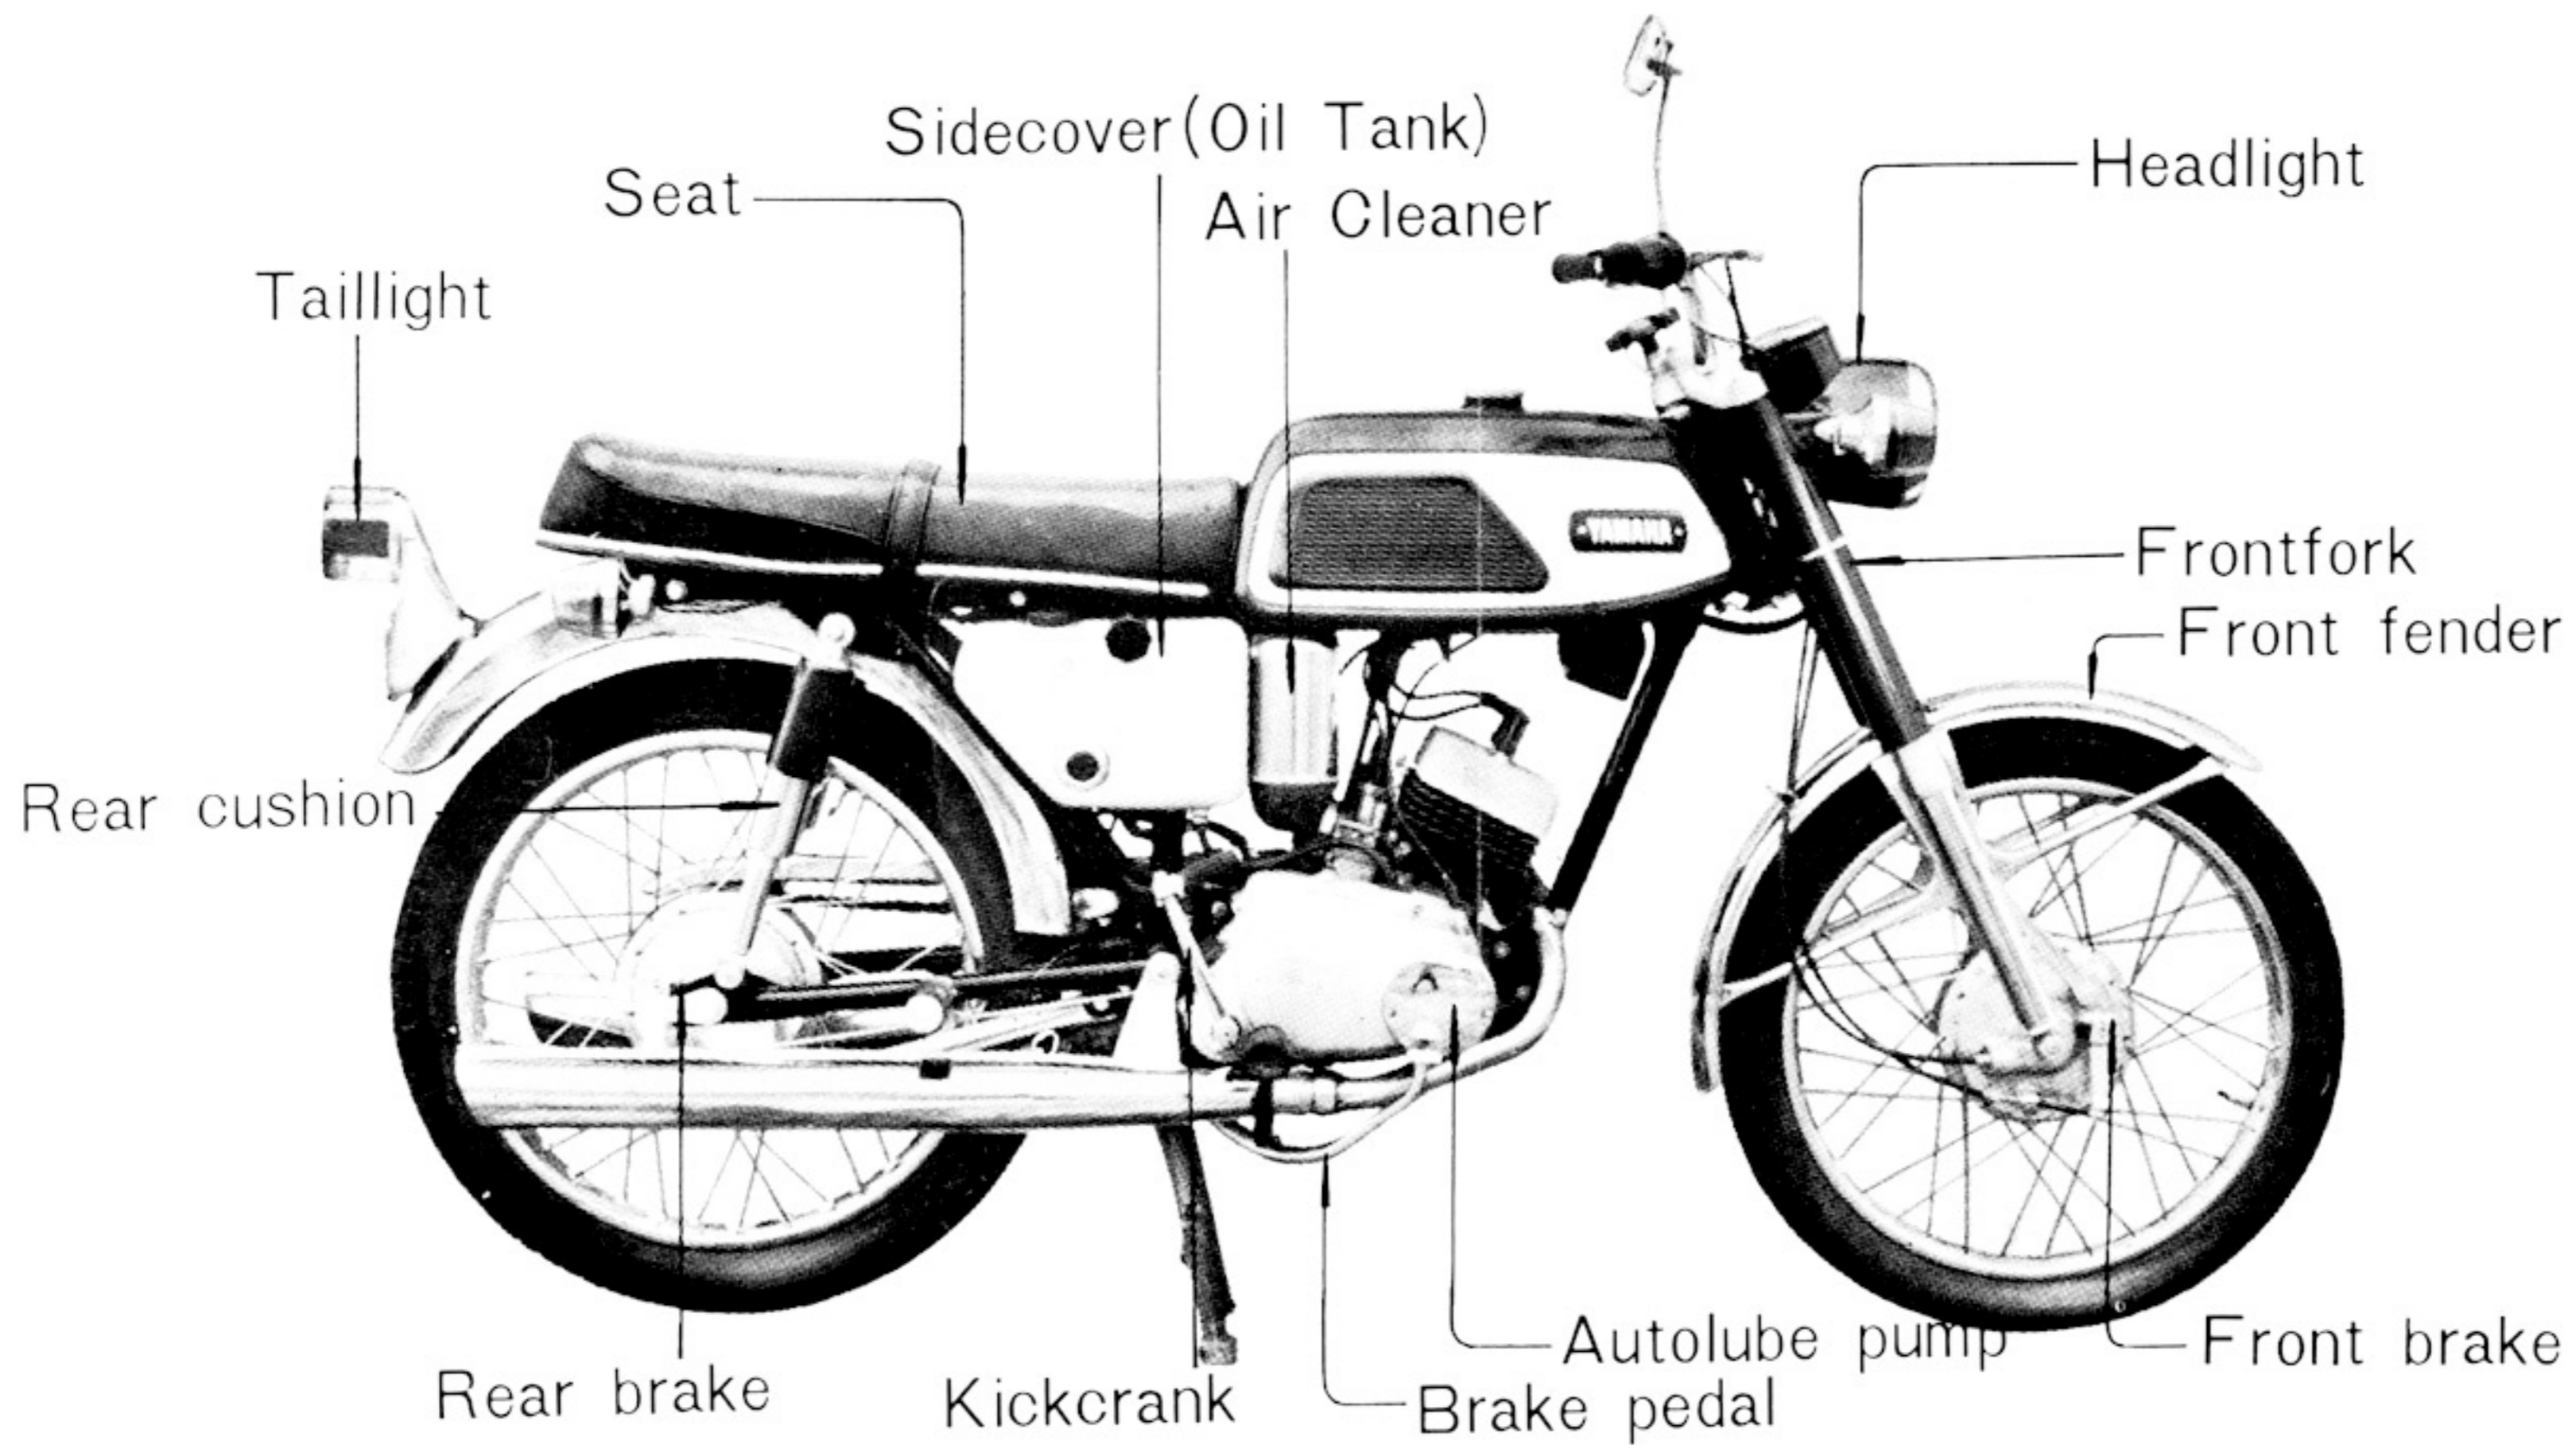

4 Operating Instructions

4-1 What you should know before operating

4-1-1 Gasoline and Oil

Since it is unnecessary to mix fuel and oil with Auto Lube, gas. can be pumped directly into the fuel tank. The oil tank is located on the righthand side of the machine. The minimum octane required to avoid preignition is 72. It is not necessary to use premium fuel.


Use SAE 30 MS oil in the Auto Lube system. High detergent oils are desirable though not necessary. A multi-viscosity oil like SAE 10-20-30 MS is also acceptable. Find the best oil available in your area and use this brand consistently. Your dealer will be able to help you in your selection. The few pennies you save by using low grade oils will not pay for damage they often do.



4-1-2 Main switch


The following chart shows the key position at which the lights, horn and ignition circuit are switched on or off:

Parts Name	Key Position			Instructions
	0	I	II	
Ignition circuit	off	on	on	I & II...Kick starting
Headlight	off	off	on	Turn on left handlebar switch
Taillight	off	off	on	
Stop light	off	on	on	
Neutral lamp	off	on	on	Goes on when gear is shifted into neutral.
Meter lamp	off	off	on	
Horn	off	on	on	Press horn button.

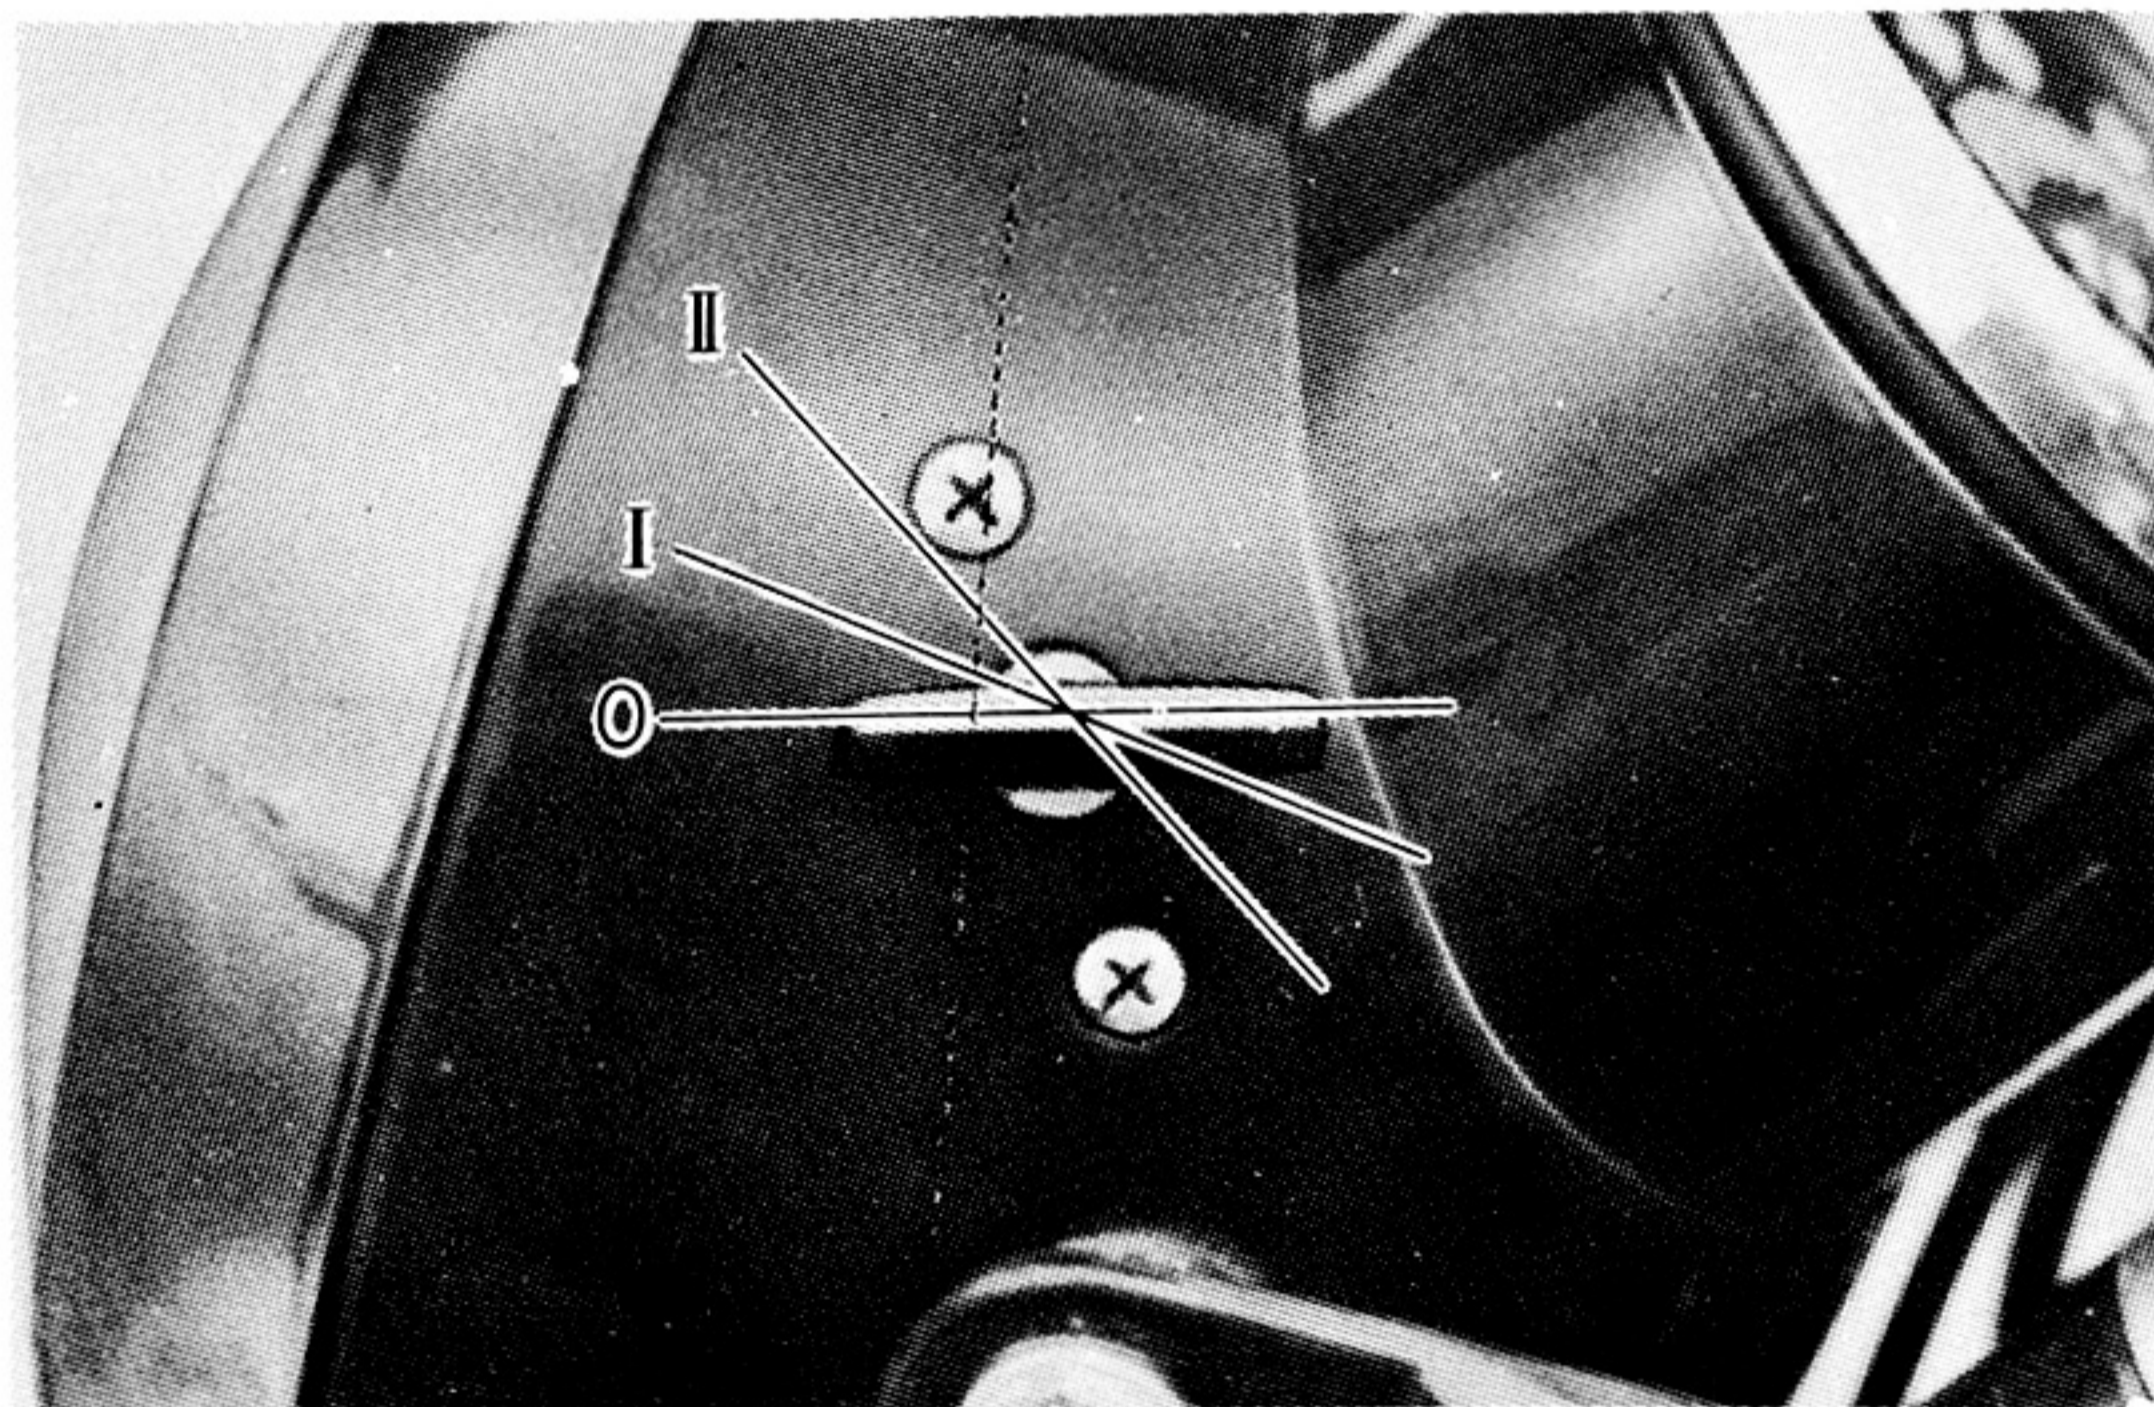



- 0 When stopped
- I Day driving
- II Night driving

To fill the carburetor float bowels, set the fuel cock lever in the open position. If you should run out of fuel on the road, turn the lever to the spare position. With just over a quart of fuel, you can drive nearly 40 miles—enough to get you to the nearest service station for refueling. When parking or storing your machine, be sure that the lever is in the closed position

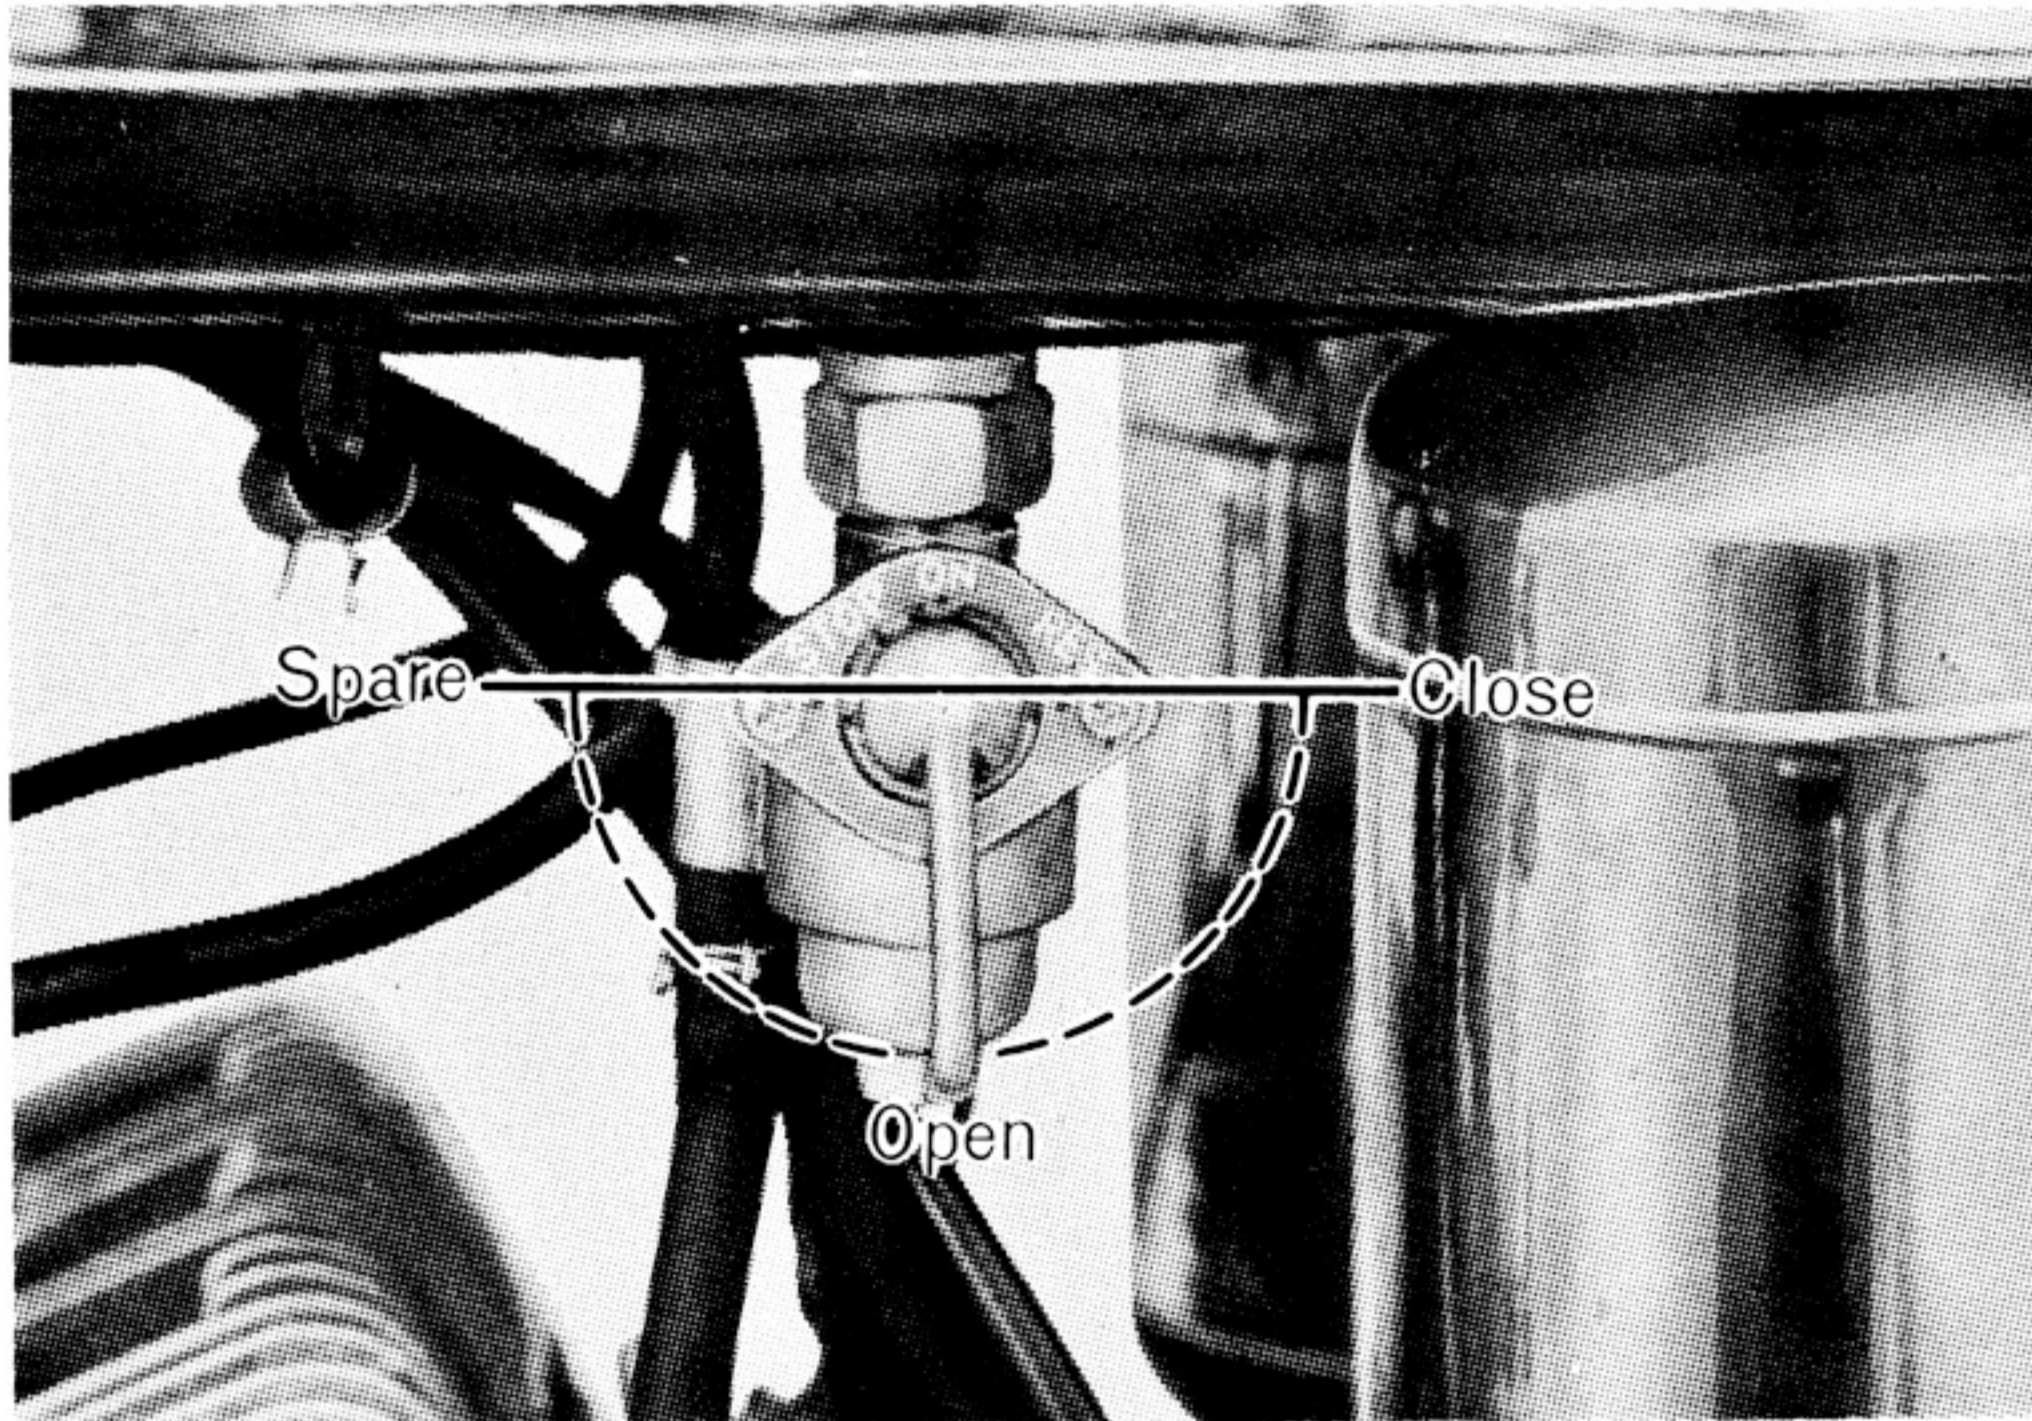


4-1-4 Handlebar switch & Horn button

Name	Instructions	Where located
Horn button (a)	Press.	on left side of handlebar
Headlight beam switch (b)	To lower the beam, push toward the left: To raise the beam, push toward the right.	on left side of handlebar (See the photo below)

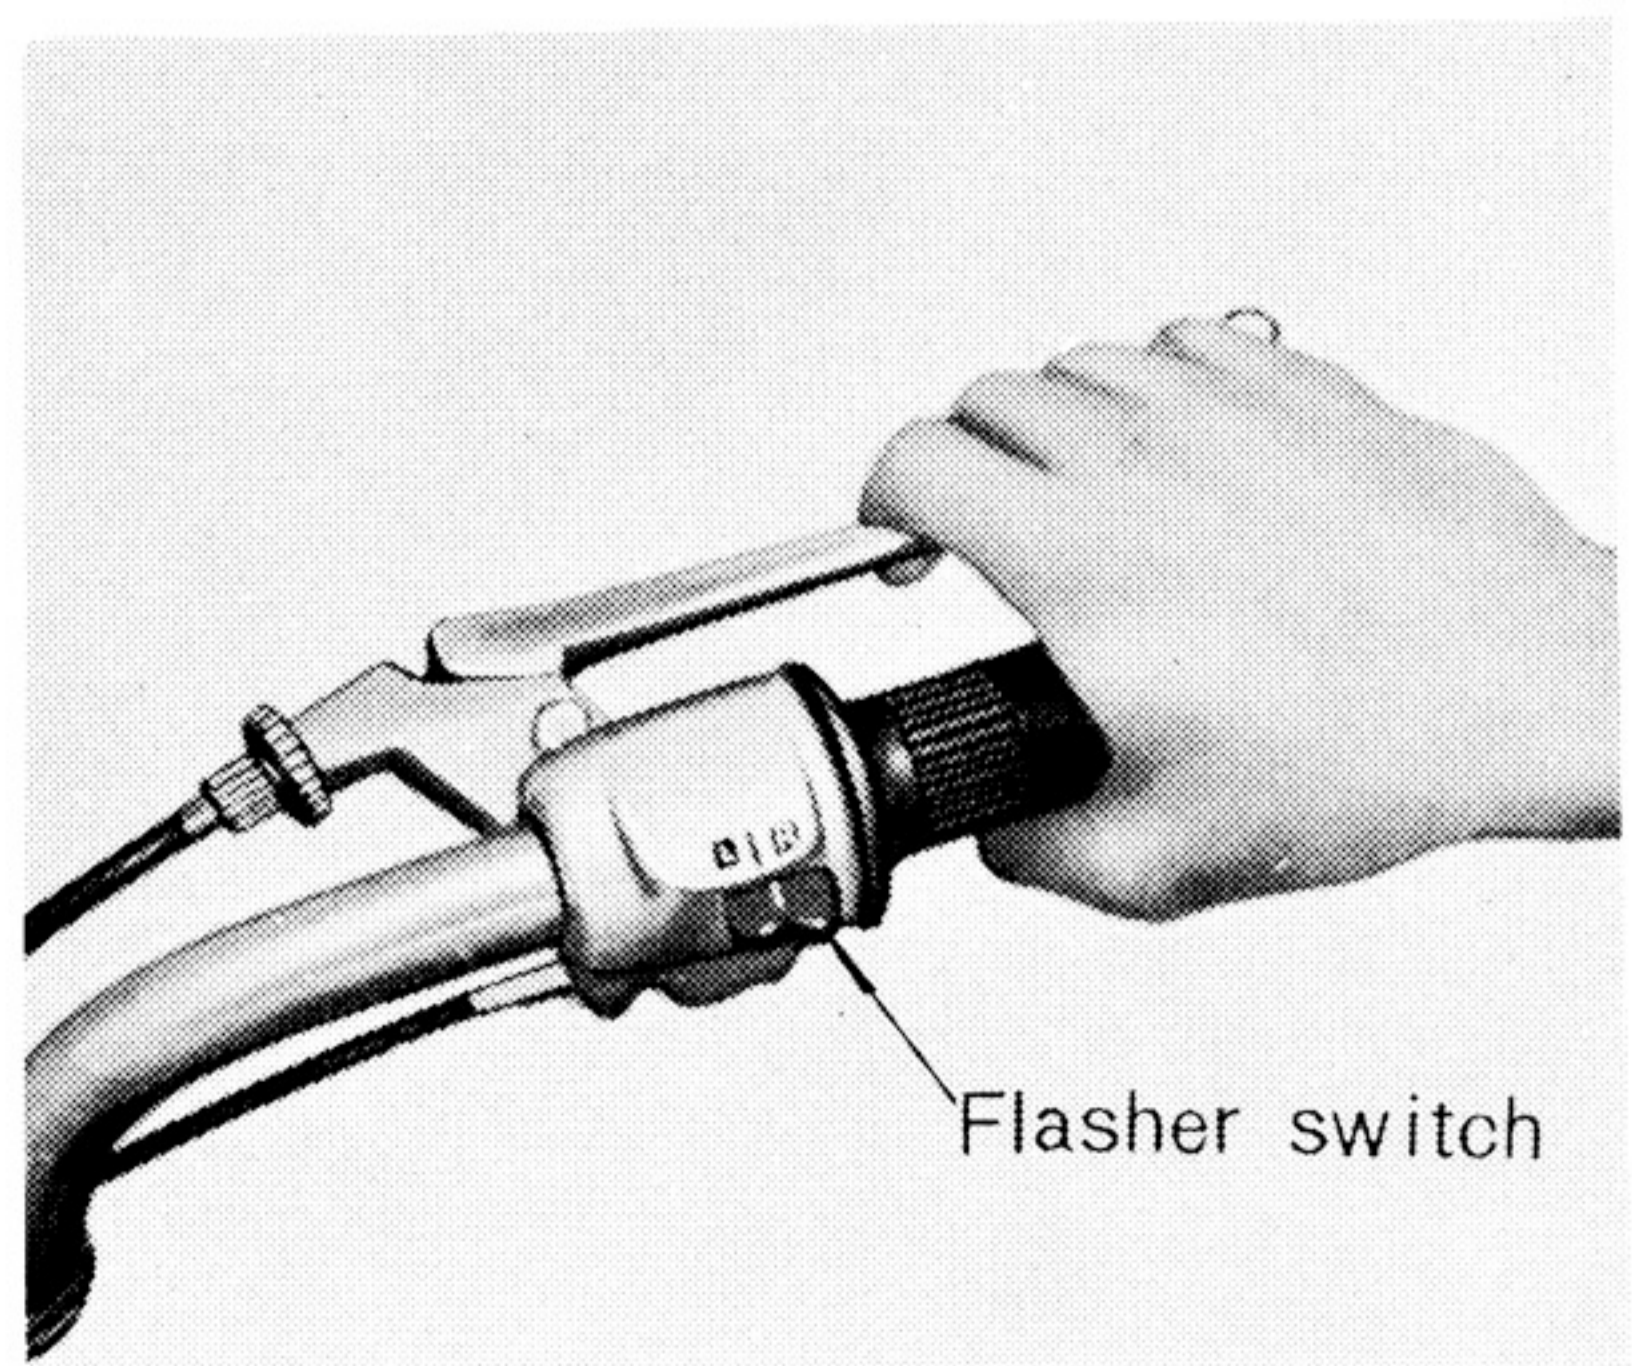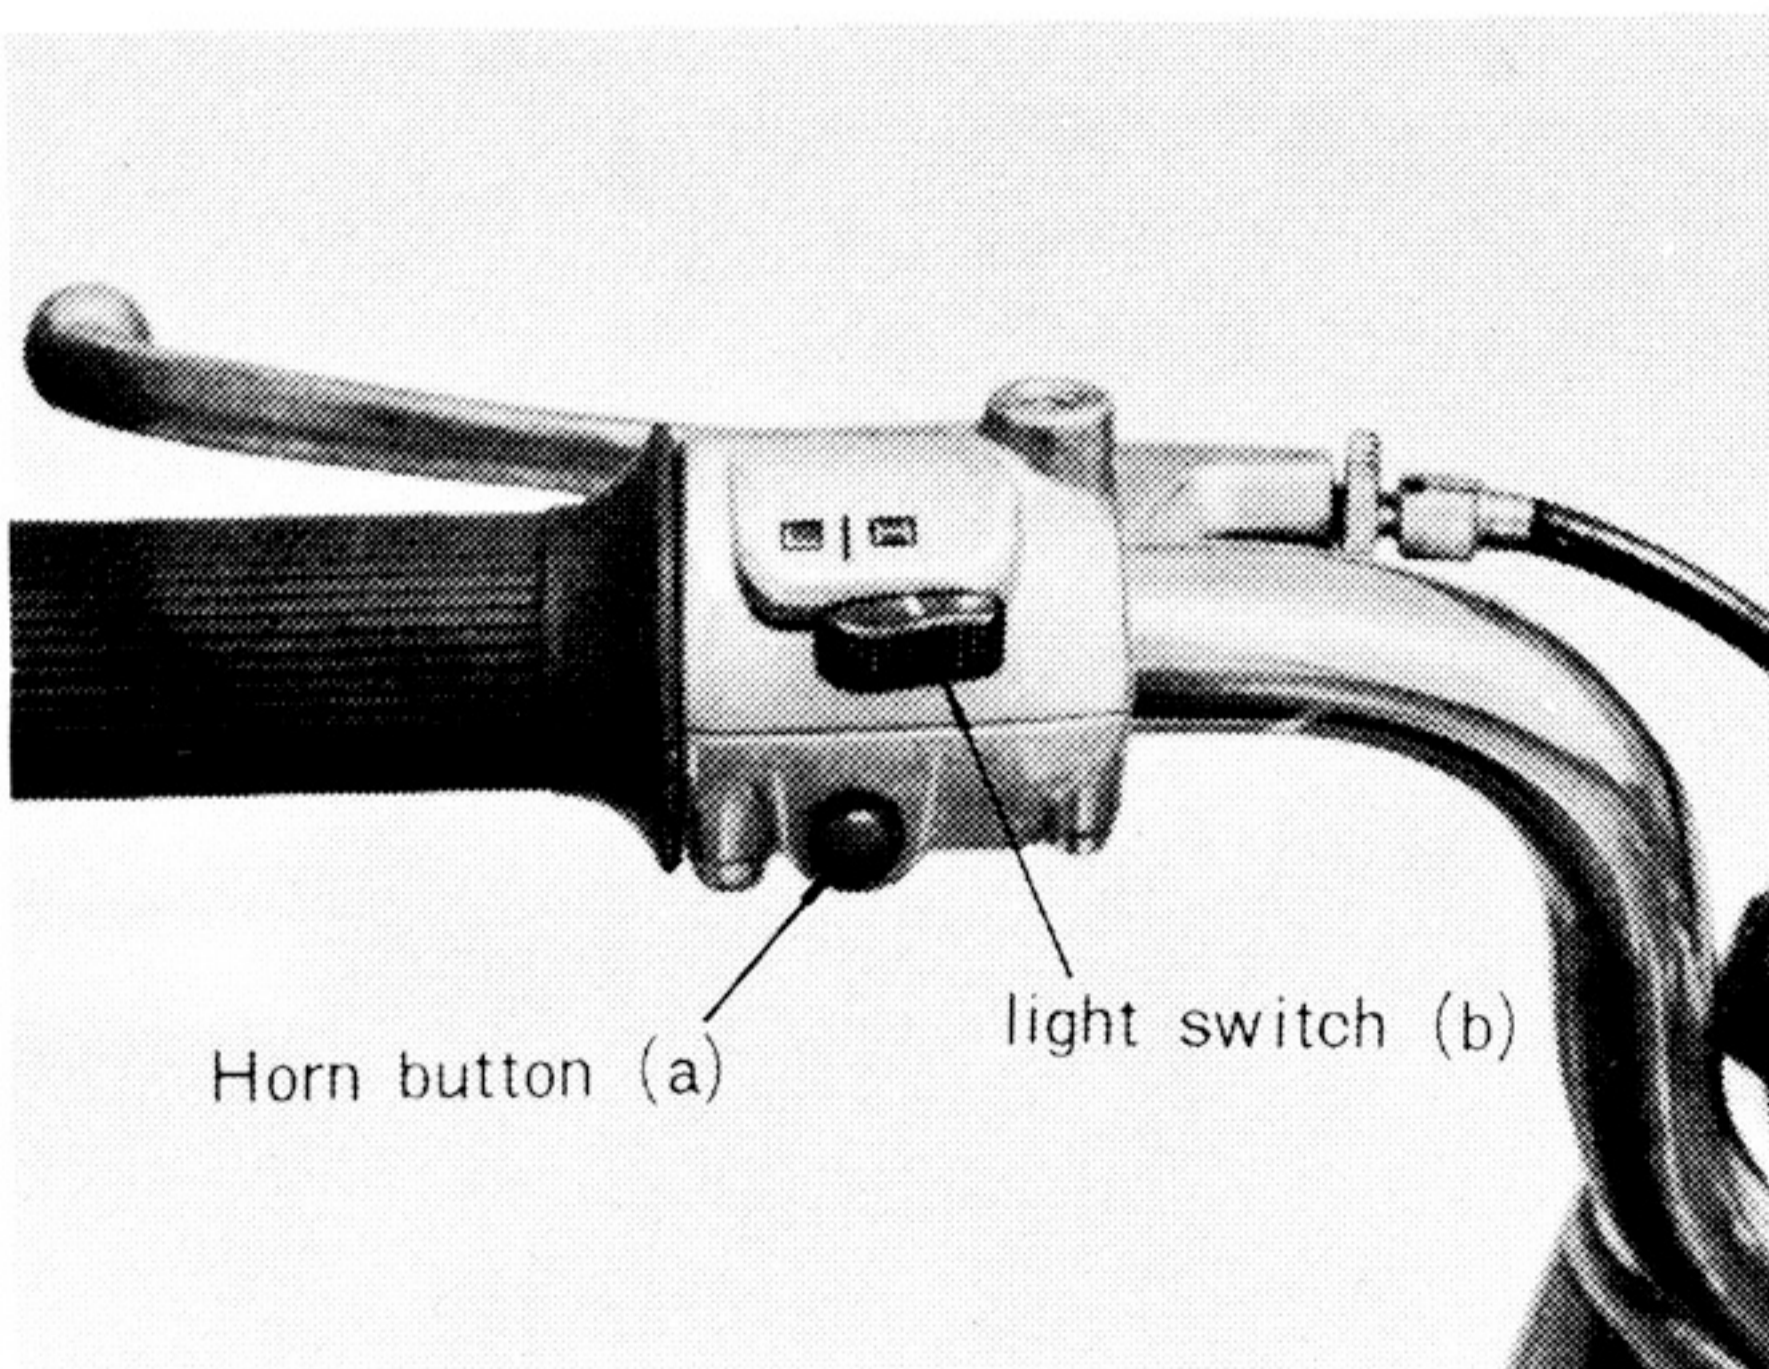

4-1-5 Steering Lock Key

Turn the handle bars to the left lock, insert the steering lock key and turn it 90° counterclockwise. Remove the key after checking to see that the front forks are securely locked. Be sure to lock your forks whenever you park.

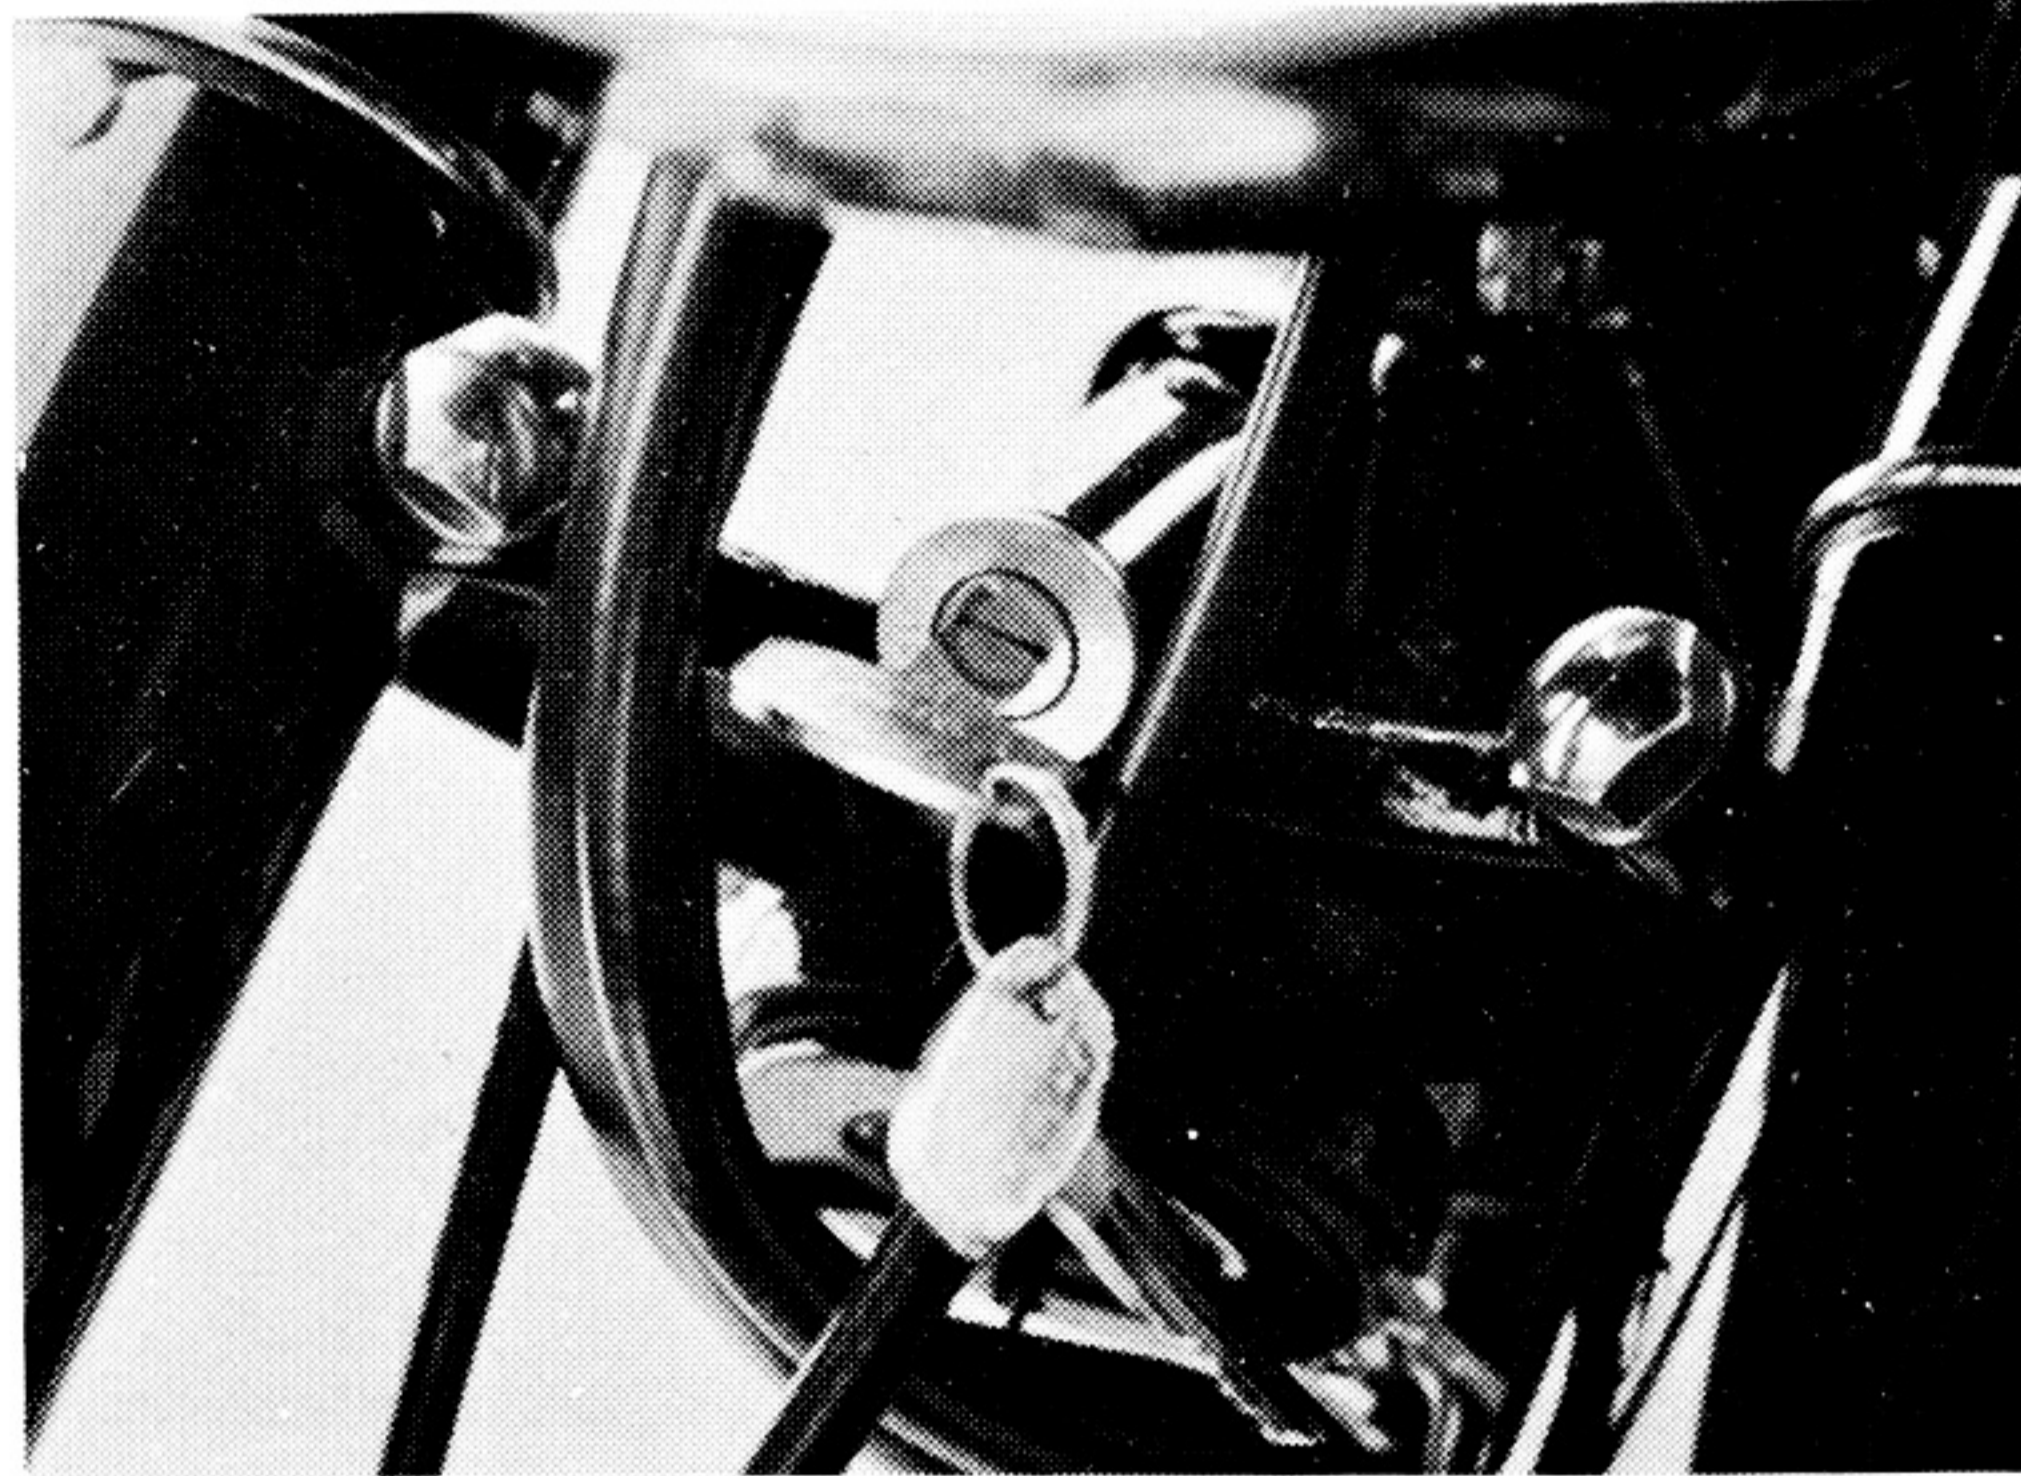


4-1-6 Steering Damper

When driving on rough roads, adjust the steering damper to absorb shock by turning it clockwise.

To get heavier steering, turn the damper knob clockwise.



To get lighter steering, turn the damper knob counterclockwise.

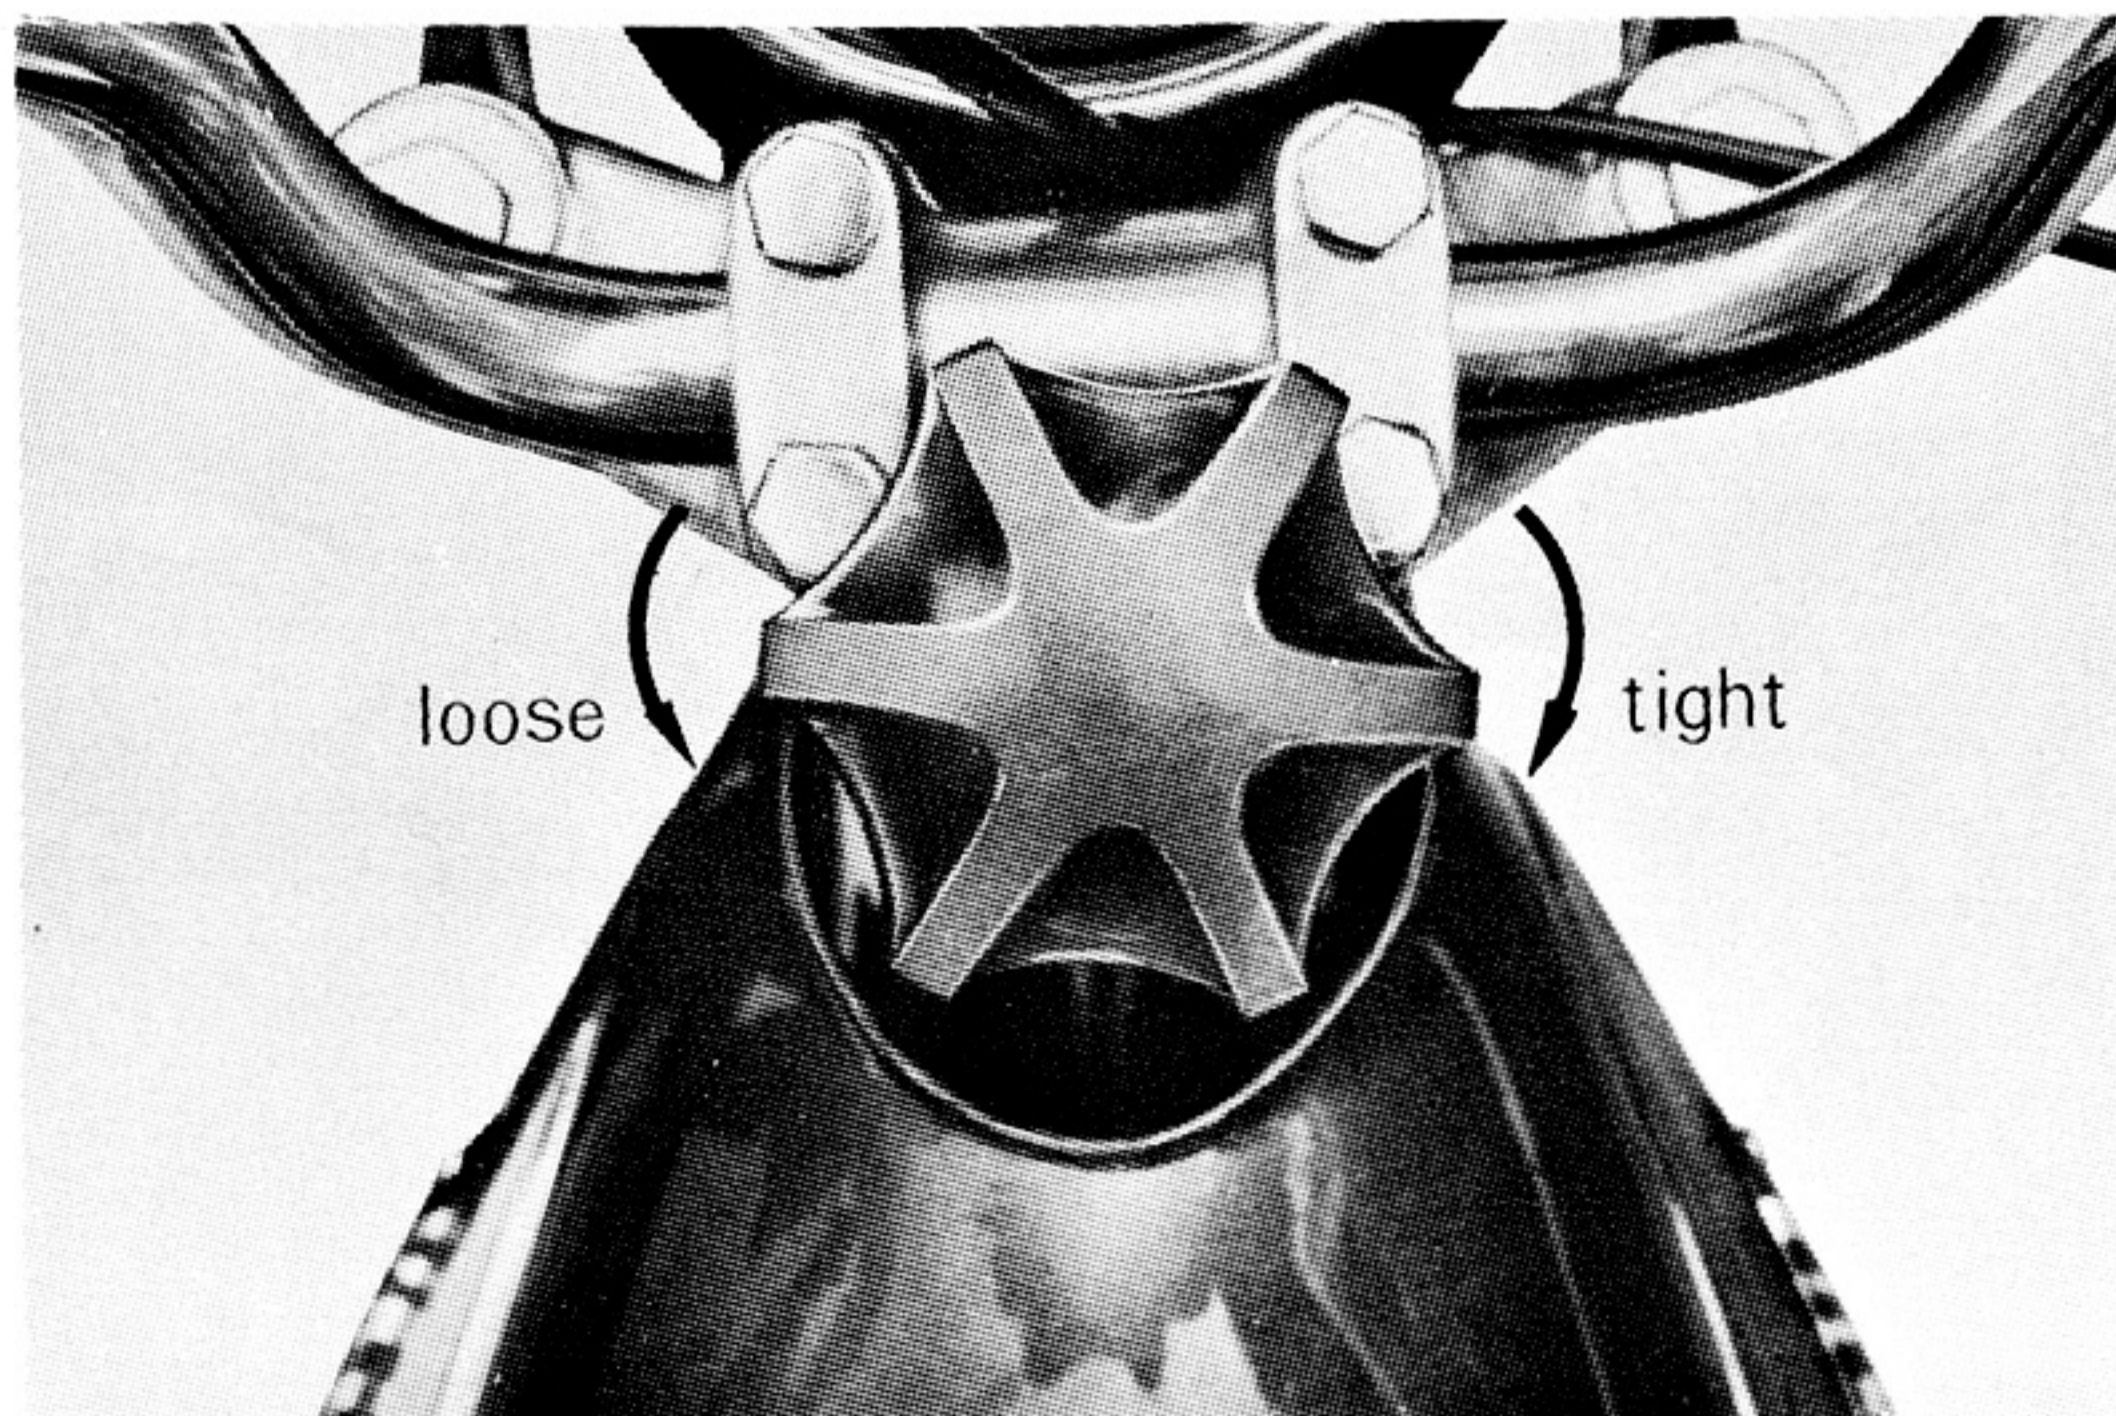

4-1-7 How to Adjust the Rear Suspension

Insert the screwdriver from your rider's tool kit in the adjusting hole. Turn the notched collar to change the spring rate. The rear suspension should be adjusted to fit your load, speed and road conditions.

- Standard A
- Intermediate B
- Stiff C

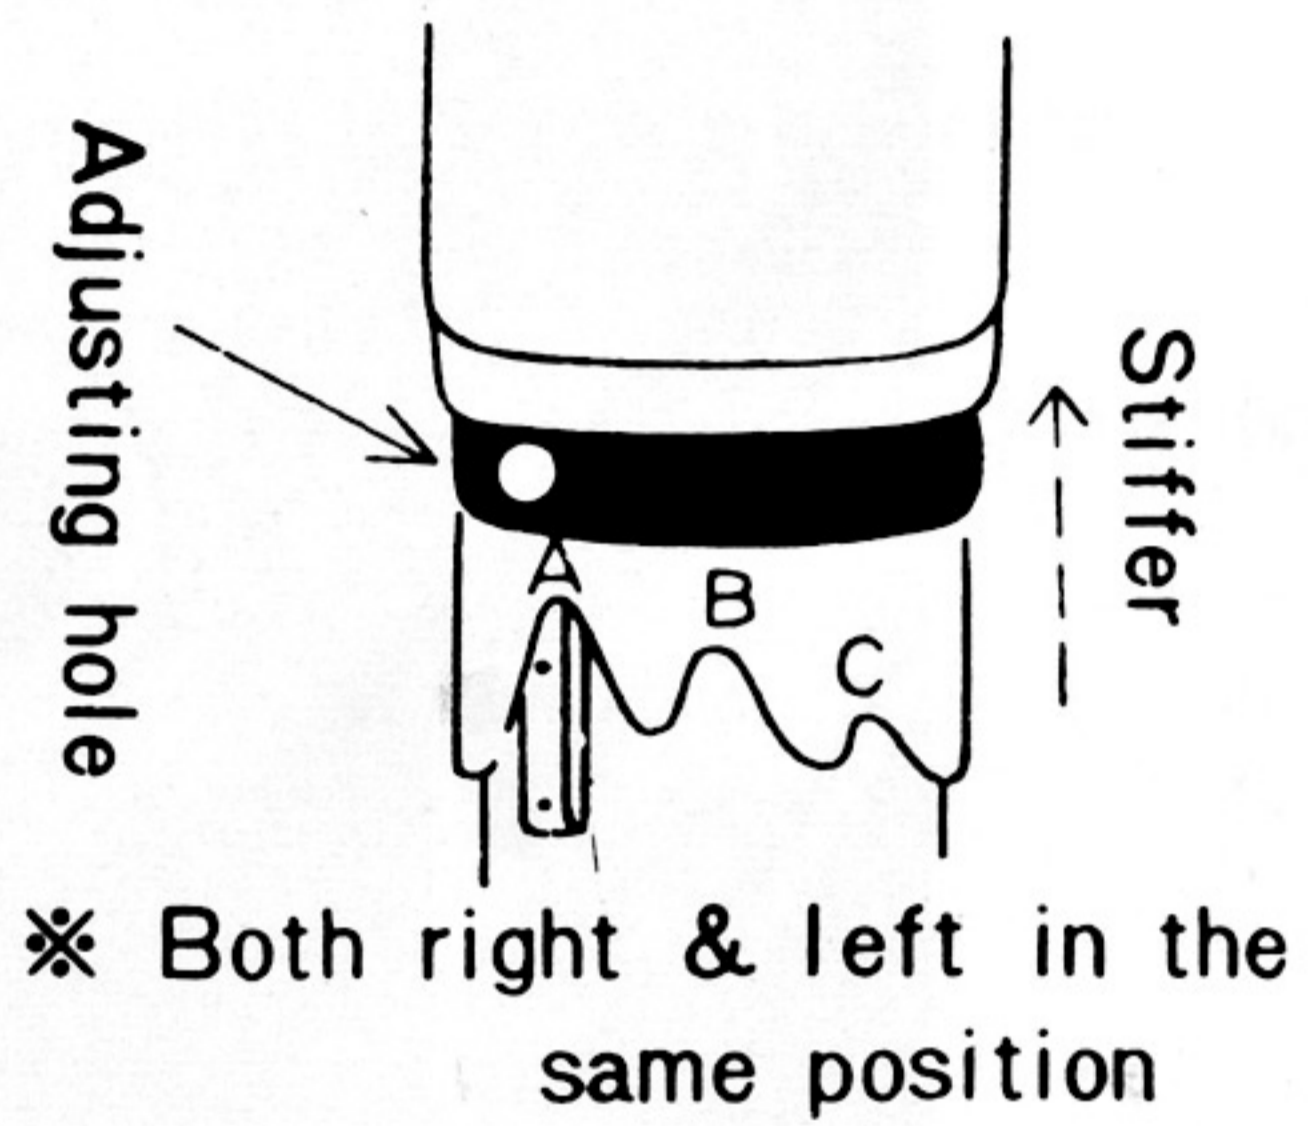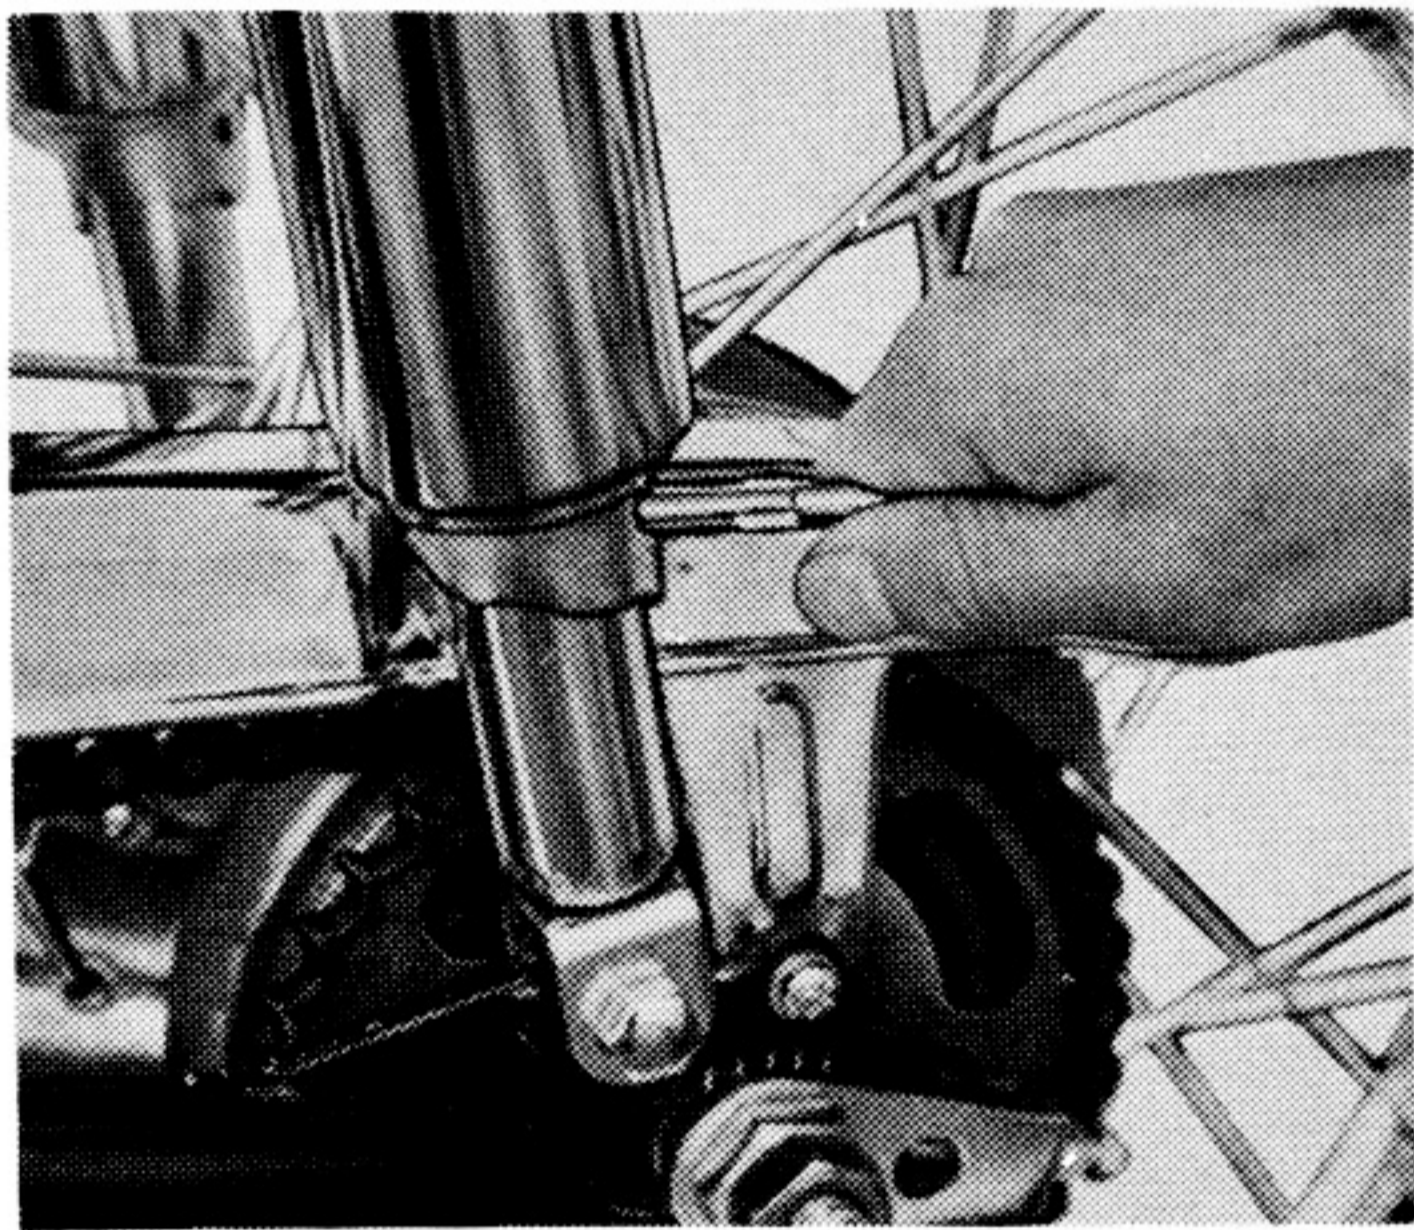


4-2 What you should check before riding

Before you start for a ride you should check several points for safety.

- a Do you have enough fuel?
- b Do you have enough oil?

If the oil is below the red level mark in the glass port, add oil. Always use the best oil available.

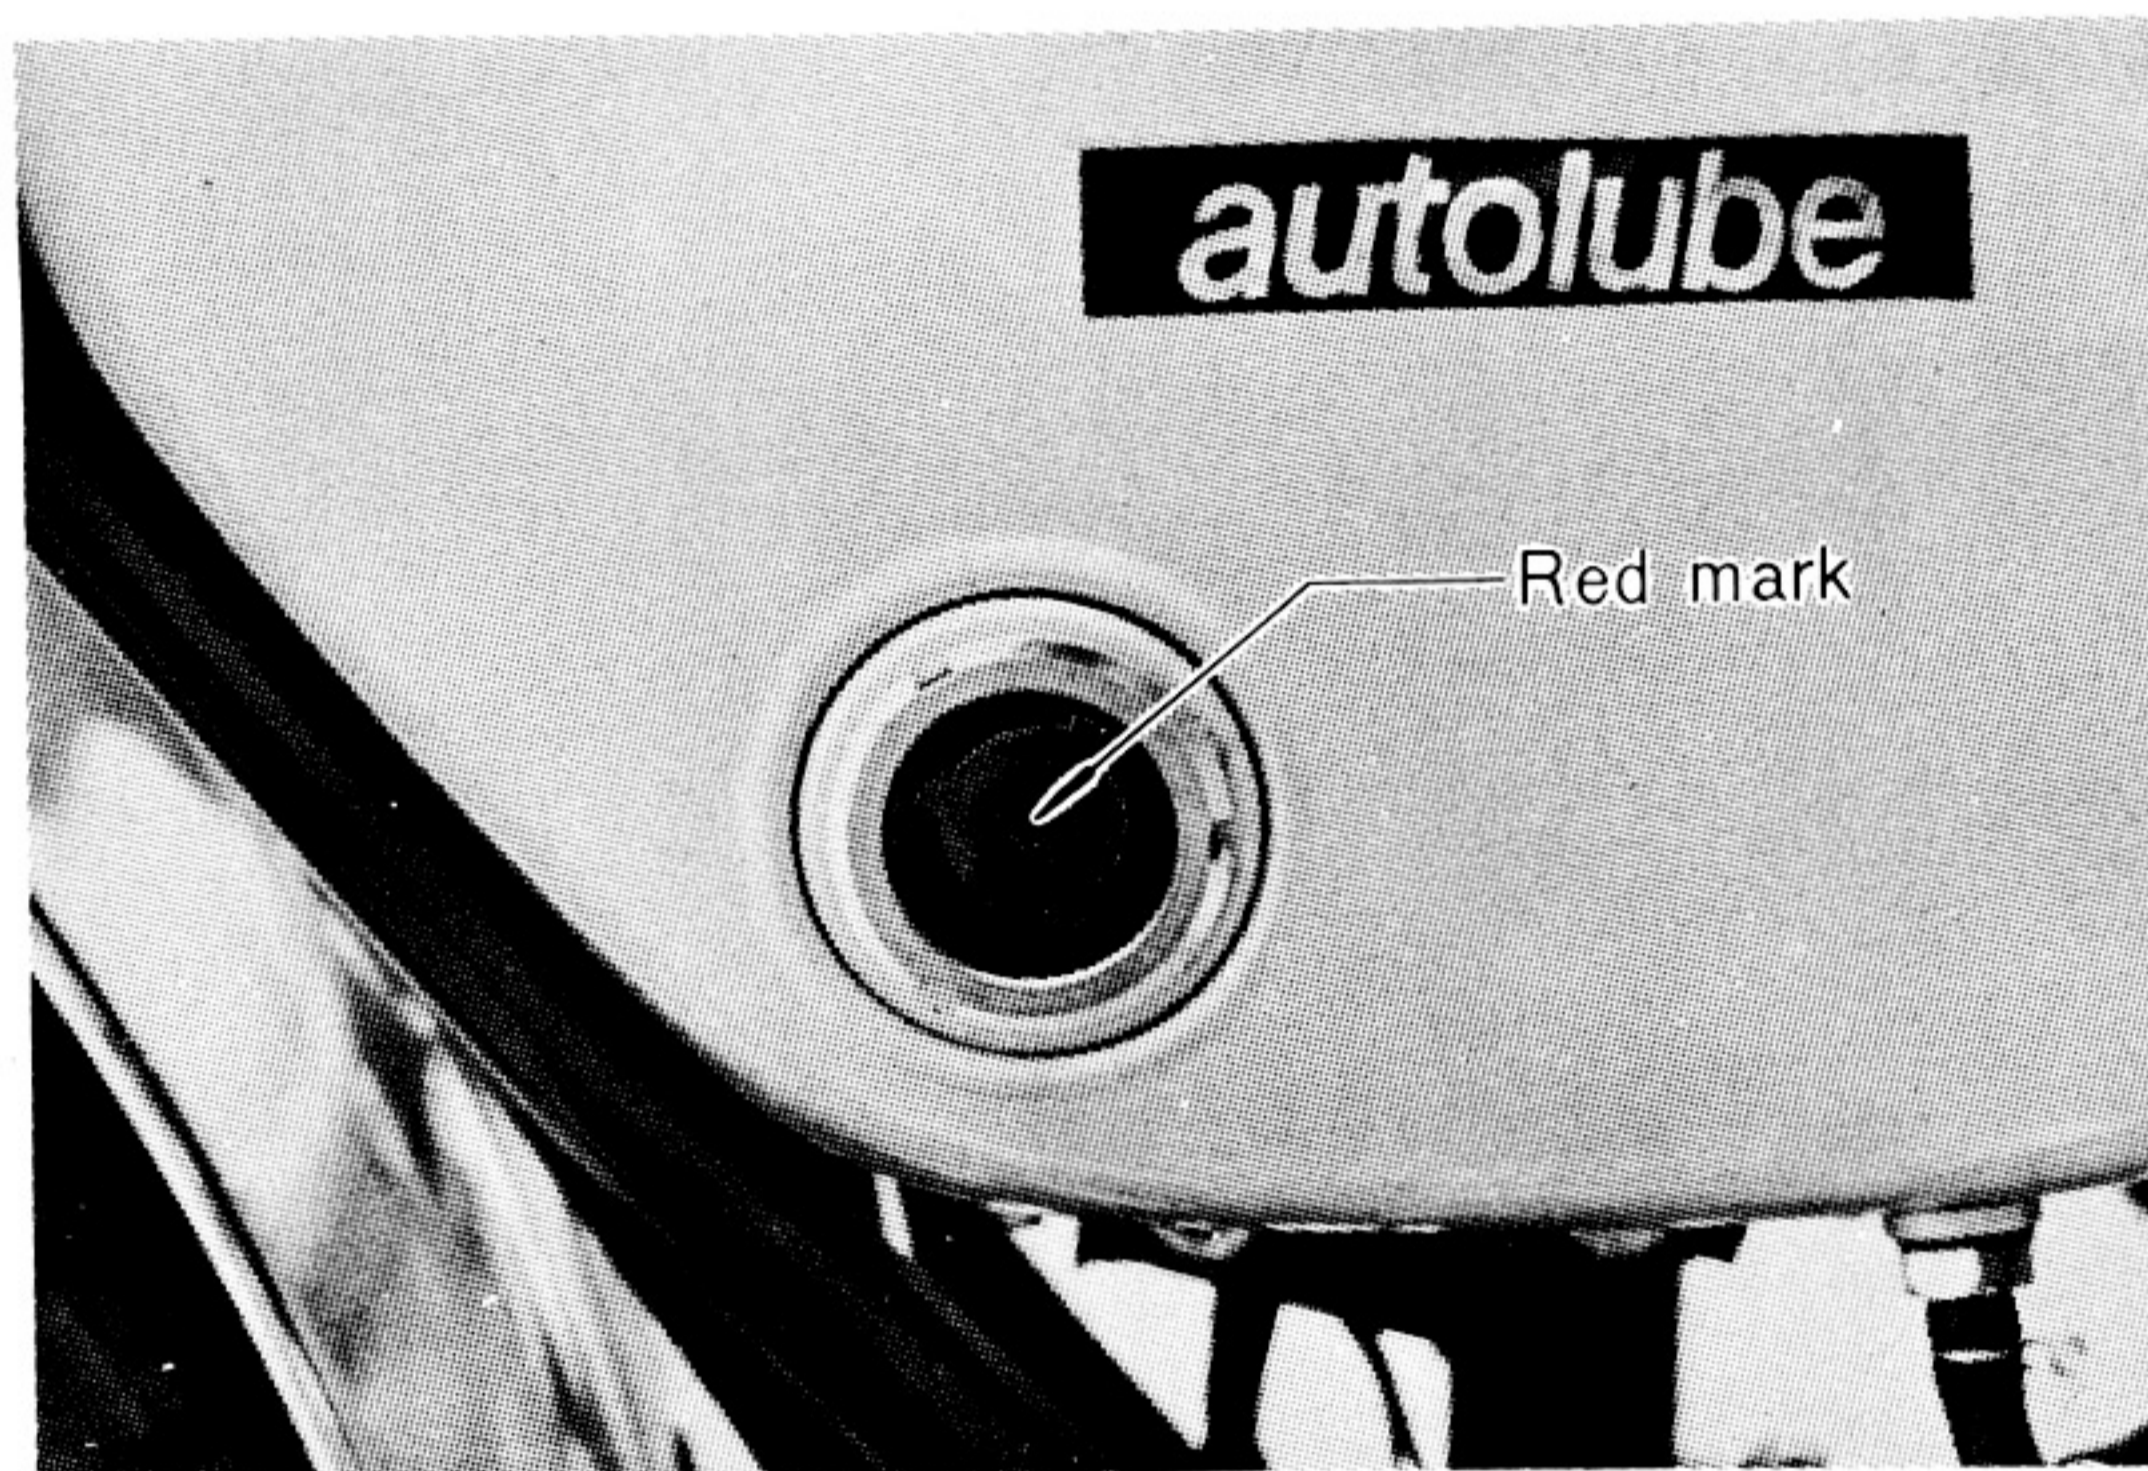

- c Are your tire pressures correct?

Incorrect tire pressures affect the comfort, handling, acceleration and tire of your machine. Incorrect tire pressures can lead to accidents!

Tire	Pressure lbs per sq. in.	
	1-person riding	2-persons riding
Front	22	22
Rear	26	28

- d Do both brakes and the brake light work?
- e Are the lights and horn in working order?

Check the headlight, tail light, speedometer lights and warning lights. The few minutes you save by not checking are not worth being stranded without lights!

4-3 Starting, Shifting gears, Stopping and Parking

4-3-1 Starting

a Before Starting

1. Turn the fuel cock lever to the "open" position.
2. Insert the ignition key and turn it to "DRIVING".


Make sure the neutral lamp is on.

CAUTION: Never start the engine unless you are in neutral.

b Starting in Cold Weather

Any engine is difficult to start in cold or freezing weather. However, YAS1 uses a new type carburetor with a built-in starter jet that gives a richer mixture for easier starter.

1. Depress the starter lever.
2. Start the engine with the kick starter keeping the throttle closed.

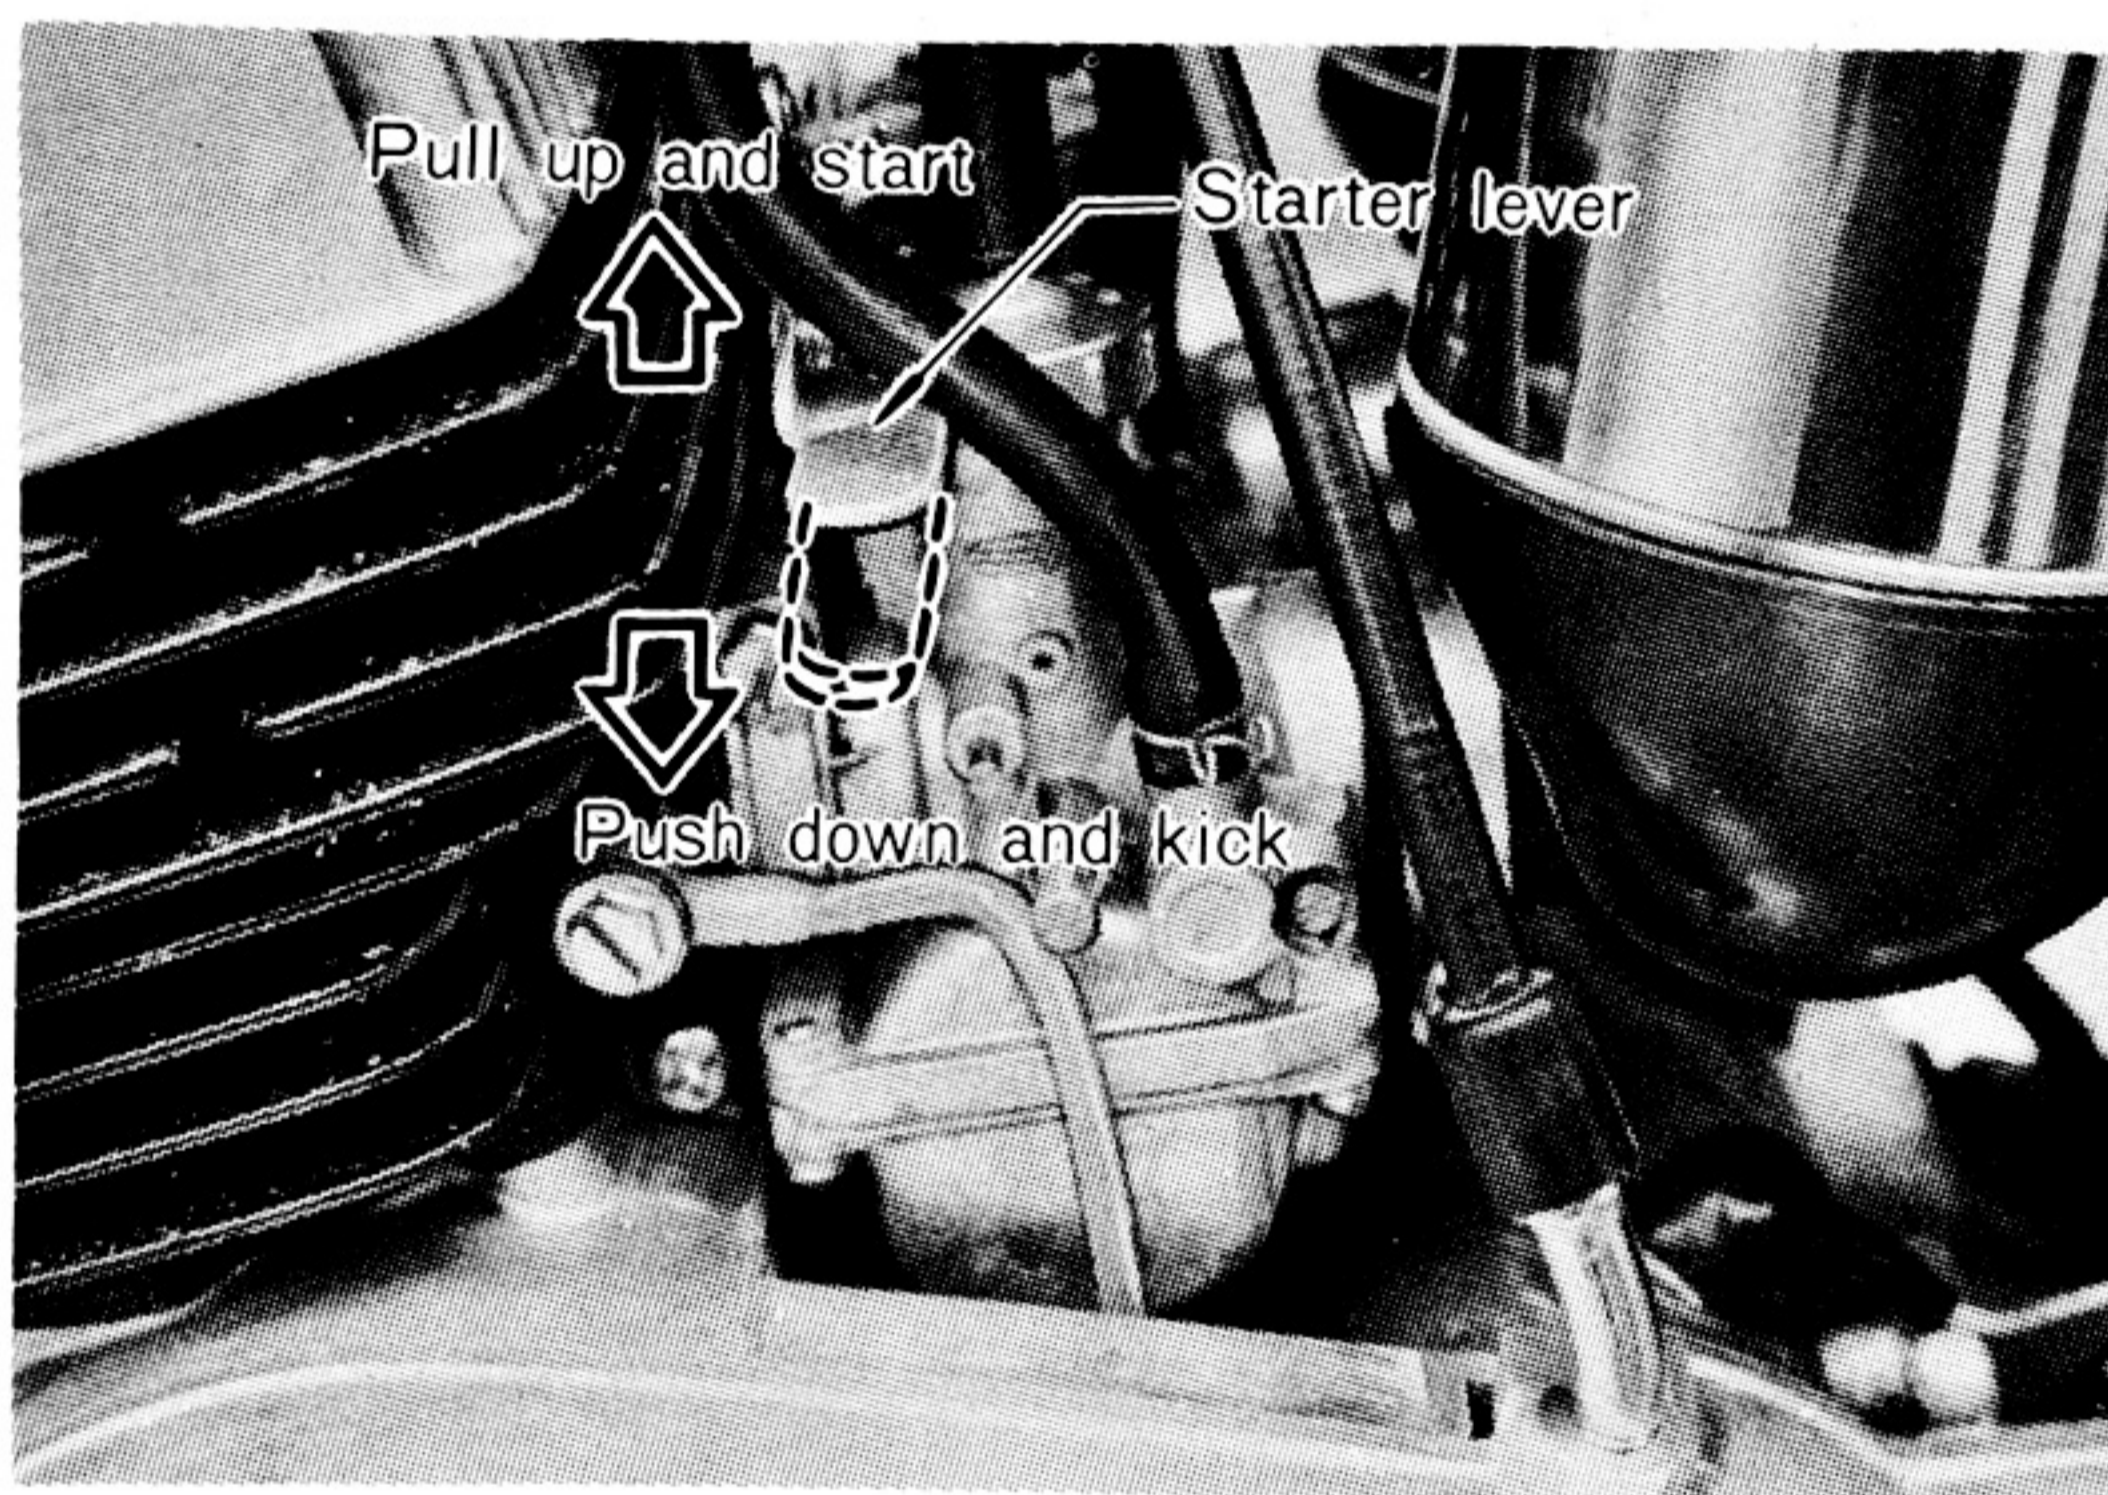

c Starting When Your Engine is Warm

When your engine is warm after riding or in the summer, don't use the starter lever.

Open the throttle slightly ($\frac{1}{4}$ turns or less) and kick the starter.

d Warming Up


To get maximum engine life, always “warm up” the engine for 1 or 2 minutes before starting off. Never accelerate hard with a cold engine! To see whether or not the engine is warm, see if it responds to throttle normally. Don't forget to release the starter lever.

4-3-2 Shifting Gears

The YAS1 has a 5-speed transmission. The transmission allows you to control the amount of power you have available at a given speed for starting, accelerating, climbing hills, etc.

The use of the gear lever is illustrated below.

FIFTH
FOURTH
THIRD
SECOND
NEUTRAL
LOW

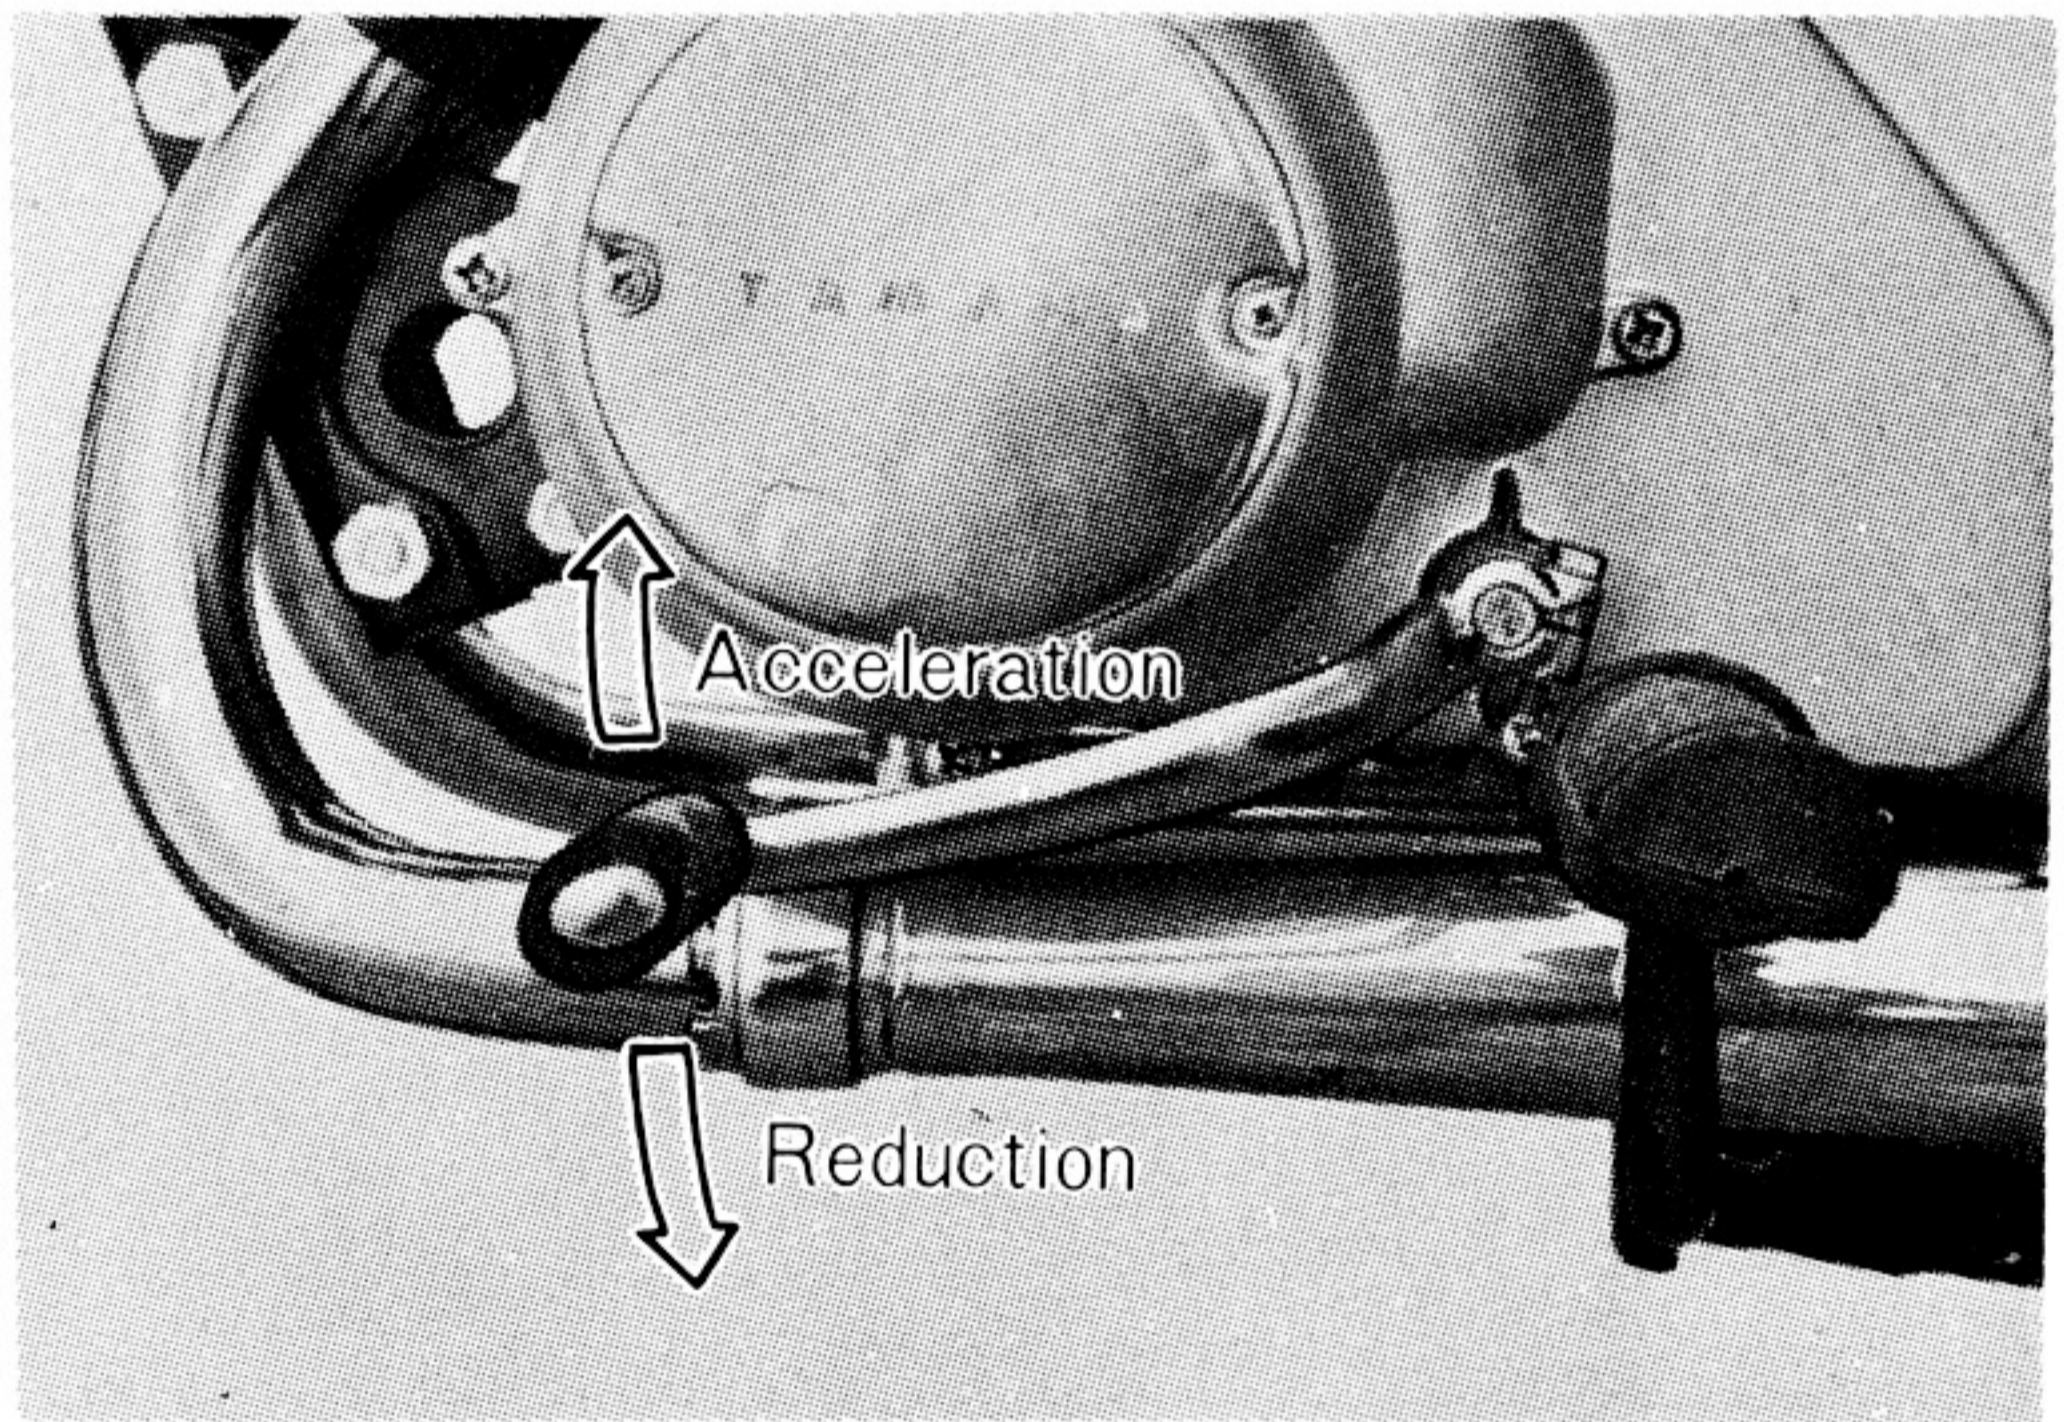

To shift into NEUTRAL, depress the gear lever to the end of its travel (you will feel a stop when you are in low gear), then raise it slightly.

If you are in neutral, the green lamp in the speedometer will be on.

1. Pull the clutch lever to disengage the clutch.
2. Shift into LOW.
3. Open the throttle gradually, and, at the same time, release the clutch lever slowly.
4. At 10 to 15 mph, release the throttle, and at the same time pull in the clutch lever quickly.
5. Shift into SECOND. Be careful not to shift into neutral.
6. Open the throttle part way and release the clutch lever.
7. To accelerate or decelerate, use the same procedure.
8. Except for competition or high speed driving, shift so that the engine speed remains between 4,000 and 5,000 rpm.

Gear	Driving conditions	Optimum speed
Low	Starting or hill climbing	0 to 15 mph
Second	Hill climbing or going slowly	15 to 25 mph
Third	On easy uphill or in streets	25 to 30 mph
Fourth	On main roads	30 to 40 mph
Fifth	High-speed running	35 or over

4-3-3 Driving on Hills

a Going Uphill

When starting to climb a gentle grade, open the throttle little by little to avoid losing engine speed and power.

When climbing a steep grade, shift down from FIFTH to FOURTH or from FOURTH to THIRD as required.

b Going Downhill

On a long down grade or sharp descent, don't rely on the brakes alone, but use the engine compression as a brake: shift into

FOURTH or THIRD as required by the grade and release the throttle.

CAUTION: Never attempt turn off the ignition switch on a long hill. This will only cause the spark plug to foul.

4-3-4 Stopping and Parking

a Stopping

1. Be sure to apply the front and rear brakes together. Applying only one may, under certain conditions, cause skids.
2. Apply both brakes gently.
3. After stopping, be sure to shift into NEUTRAL.
4. Turn the fuel cock lever to "STOP."
5. Remove the ignition key.

b Parking

1. Close the fuel cock and remove the ignition key.
2. Lock the handlebars by using the steering lock key.

4-4 Break in period

During the first 600 miles, you can, by observing a few simple precautions, greatly increase the life of your YAS1 and its performance. The following precautions will guarantee proper seating in for your engine.

1. Up to the first 300 miles, drive at 40 m.p.h or under while in top gear.
2. Up to the next 300 miles, drive at 50 m.p.h or under while in top gear.

(For the speed limit of each gear against top gear, see the following table.)

Driving Distance	Maximum Speed, mph				
	Top	Fourth	Third	Second	Low
0 to 300 miles	40	30	25	20	10
300 to 600 miles	50	40	30	25	15

3. Don't accelerate or decelerate suddenly. Use the throttle gently.

5 How to keep your Motorcycle in top condition

Regular inspection and maintenance help keep your motorcycle in top condition. They are preventative measures. Don't wait until something goes wrong.

5-1 Periodic service at Your Yamaha Dealer's

When you have reached 300, 1,000 and 3,000 miles, have your Yamaha dealer inspect and service the following things.

Periodical Inspection Guide

Check Point	Driving Distance			
	300miles	1,000miles	3,000miles	thereafter every 2,000miles
Front & rear brakes adjustment	○	○	○	○
Clutch adjustment	○	○	○	○
Gear oil change	○	○	○	○
Greasing		○	○	○
Battery fluid	○	○	○	○
Spark plug	○	○	○	○
Ignition timing		○	○	○
Carburetor adjustment		○	○	○
Carburetor cleaning			○	○
Air cleaner cleaning		○	○	○
Cylinder head & piston cleaning		○	○	○
Muffler cleaning		○	○	○
Bolts & nuts tightening		○	○	○
Drive chain		○	○	○
Oil pump adjustment	○	○	○	○

5-2-2 What you should do yourself.

In addition to the periodic inspections by your Yamaha dealer, it is wise to check the following things yourself once or twice a month. All these operations can be carried out with the tools in your rider's tool kit.


Periodic inspection guide

Check point	Instructions	P. Ref.
Spark plug	Clean.	32
Air cleaner	Clean.	33
Battery	Check or, if necessary replenish battery fluid.	31
Drive chain	Adjust and oil.	35
Gear oil	Change.	30
Front & rear brakes	Adjust cables	27 · 28
Muffler	Clean.	36
Bolts & nuts	Tighten.	37

Be sure to go through this inspection before long trips.

5-3 Service Tools and their use

5-3-1 Service tools:

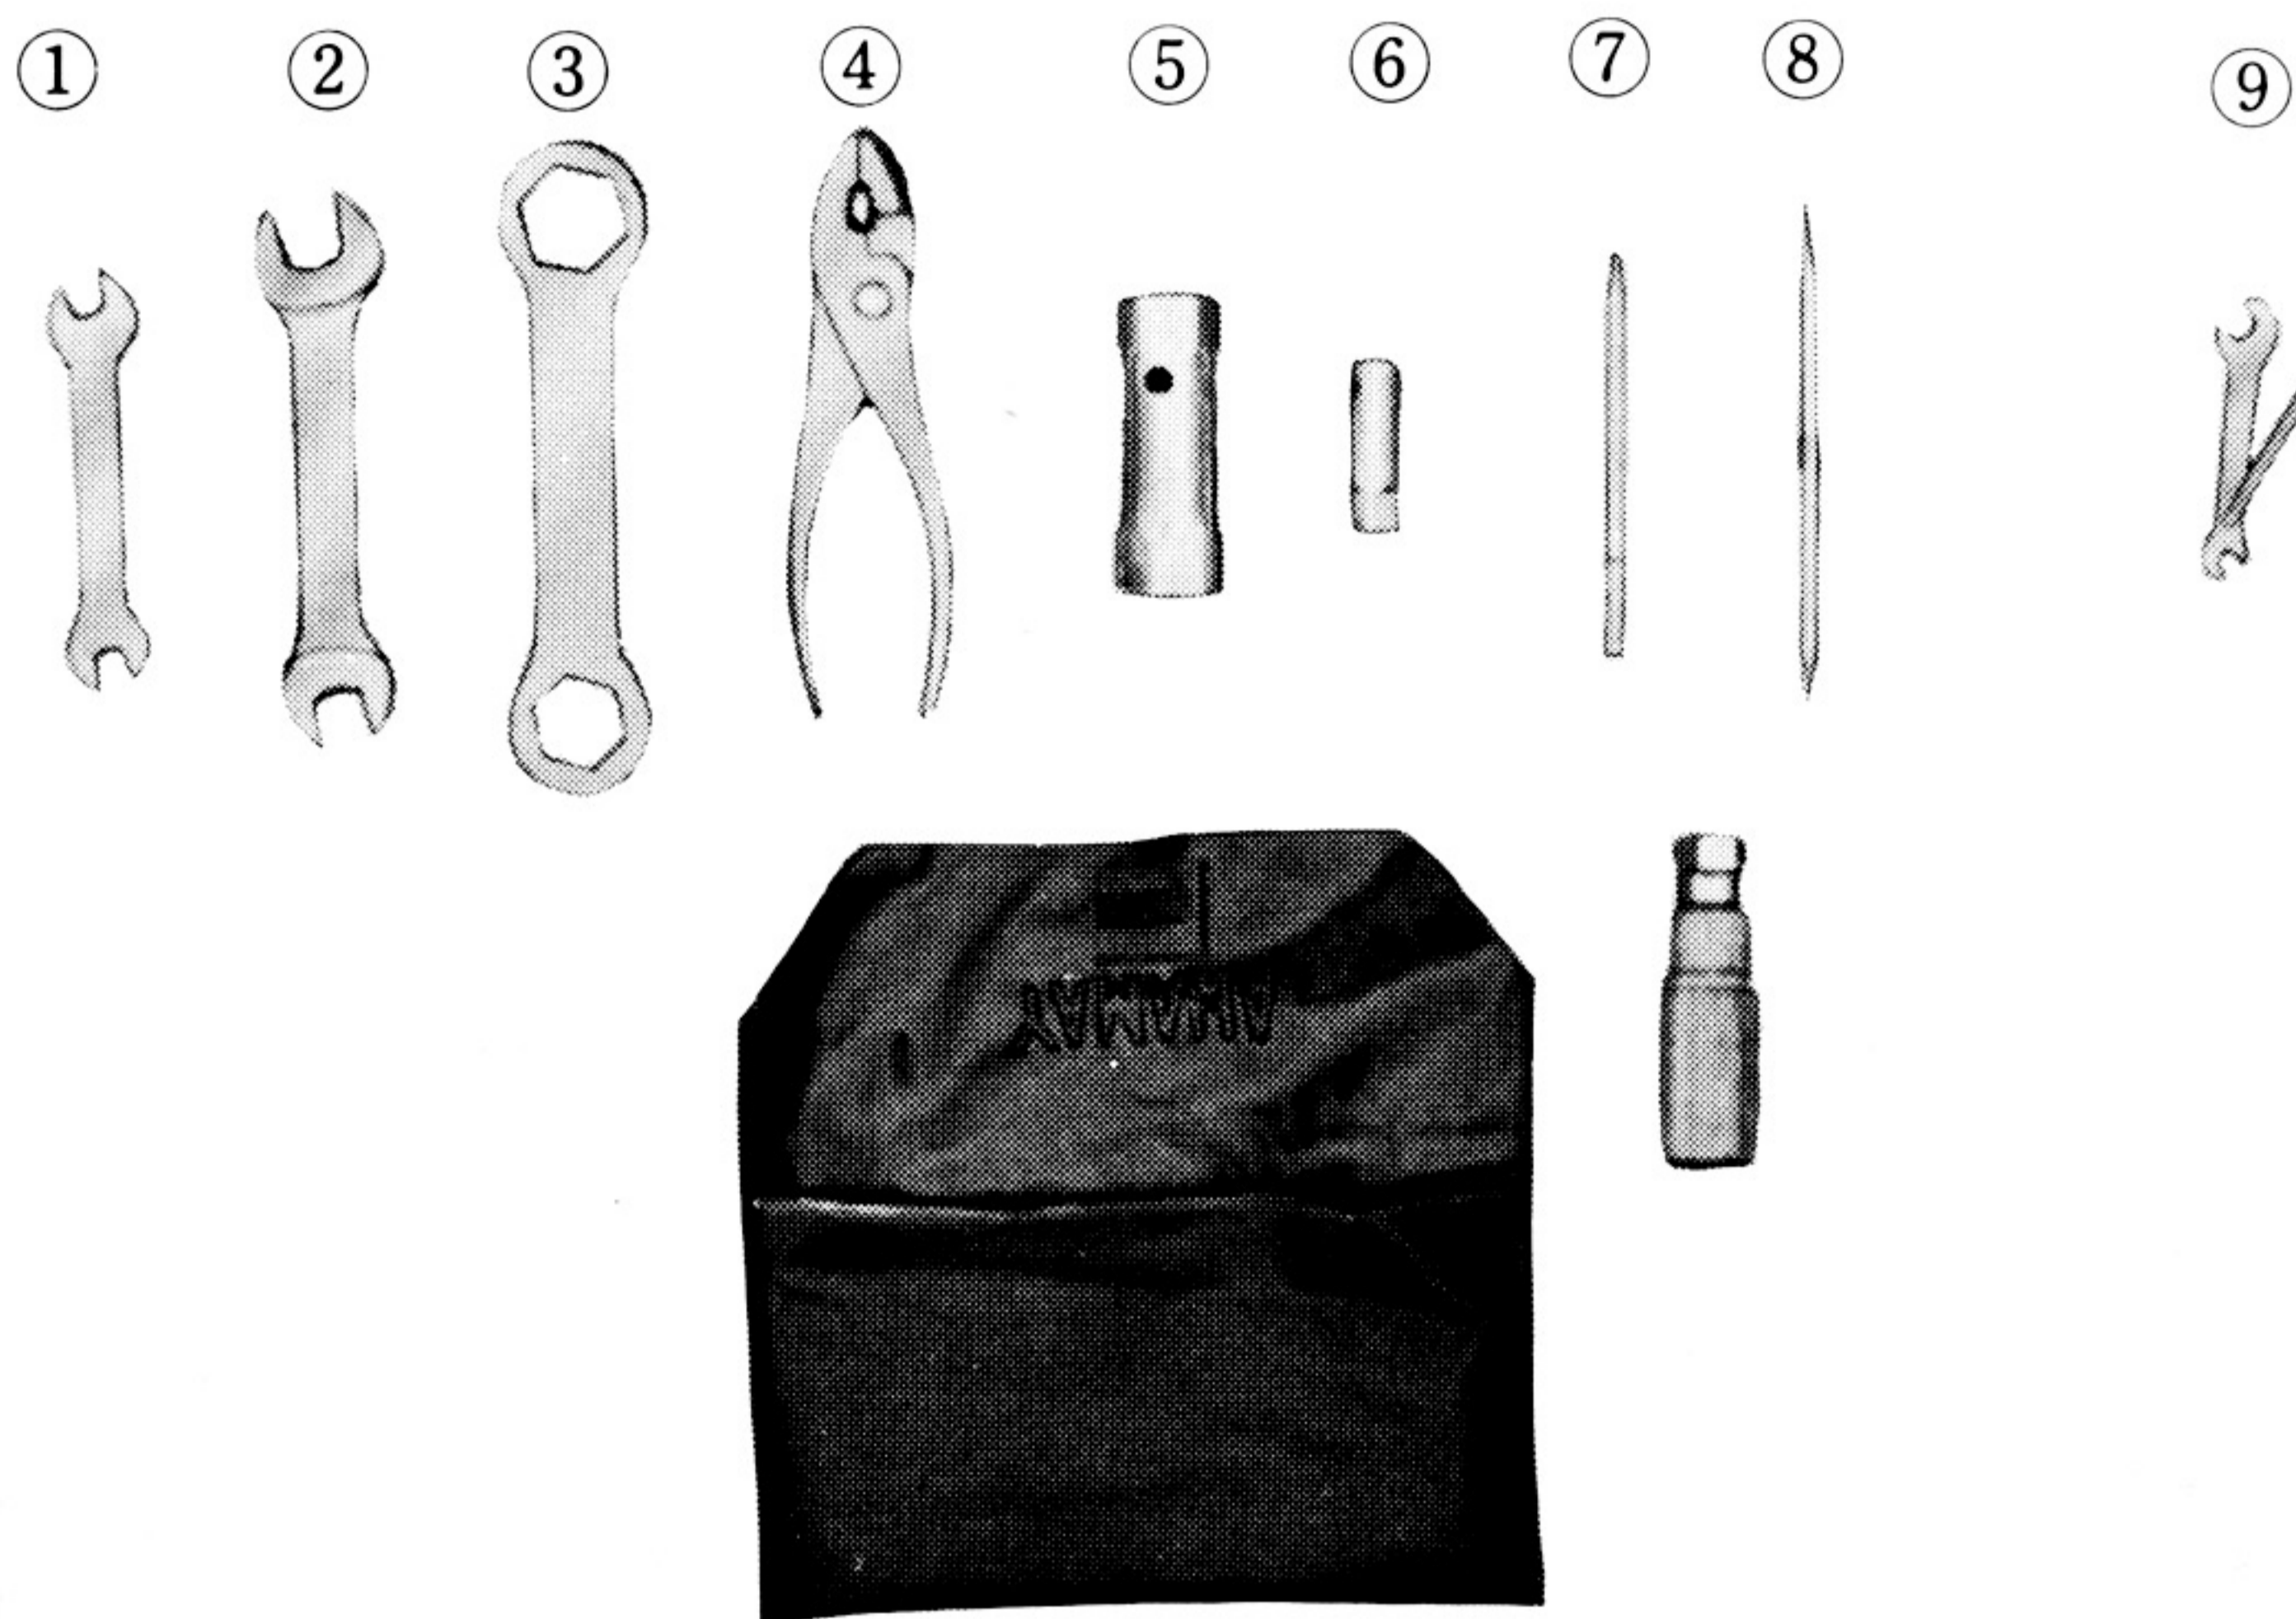



1. 9 × 10 mm double-ended spanner
2. 17 × 14 mm double-ended spanner
3. 23 × 26 mm double-ended spanner
4. Pliers
5. 21 mm plug socket 21 × 23 mm
6. 10 mm plug socket
7. ⊕ screwdriver
8. ⊕ ⊖ screwdriver
9. Point spanner

5-3-2 Use of Service Tools

I Adjusting the brakes


a Front Brake

The correct end play of the brake lever is 5~8mm($\frac{3}{16}$ "~ $\frac{5}{16}$ ") Adjust this by turning the adjusting nut at the end of the brake cable half a turn at a time.

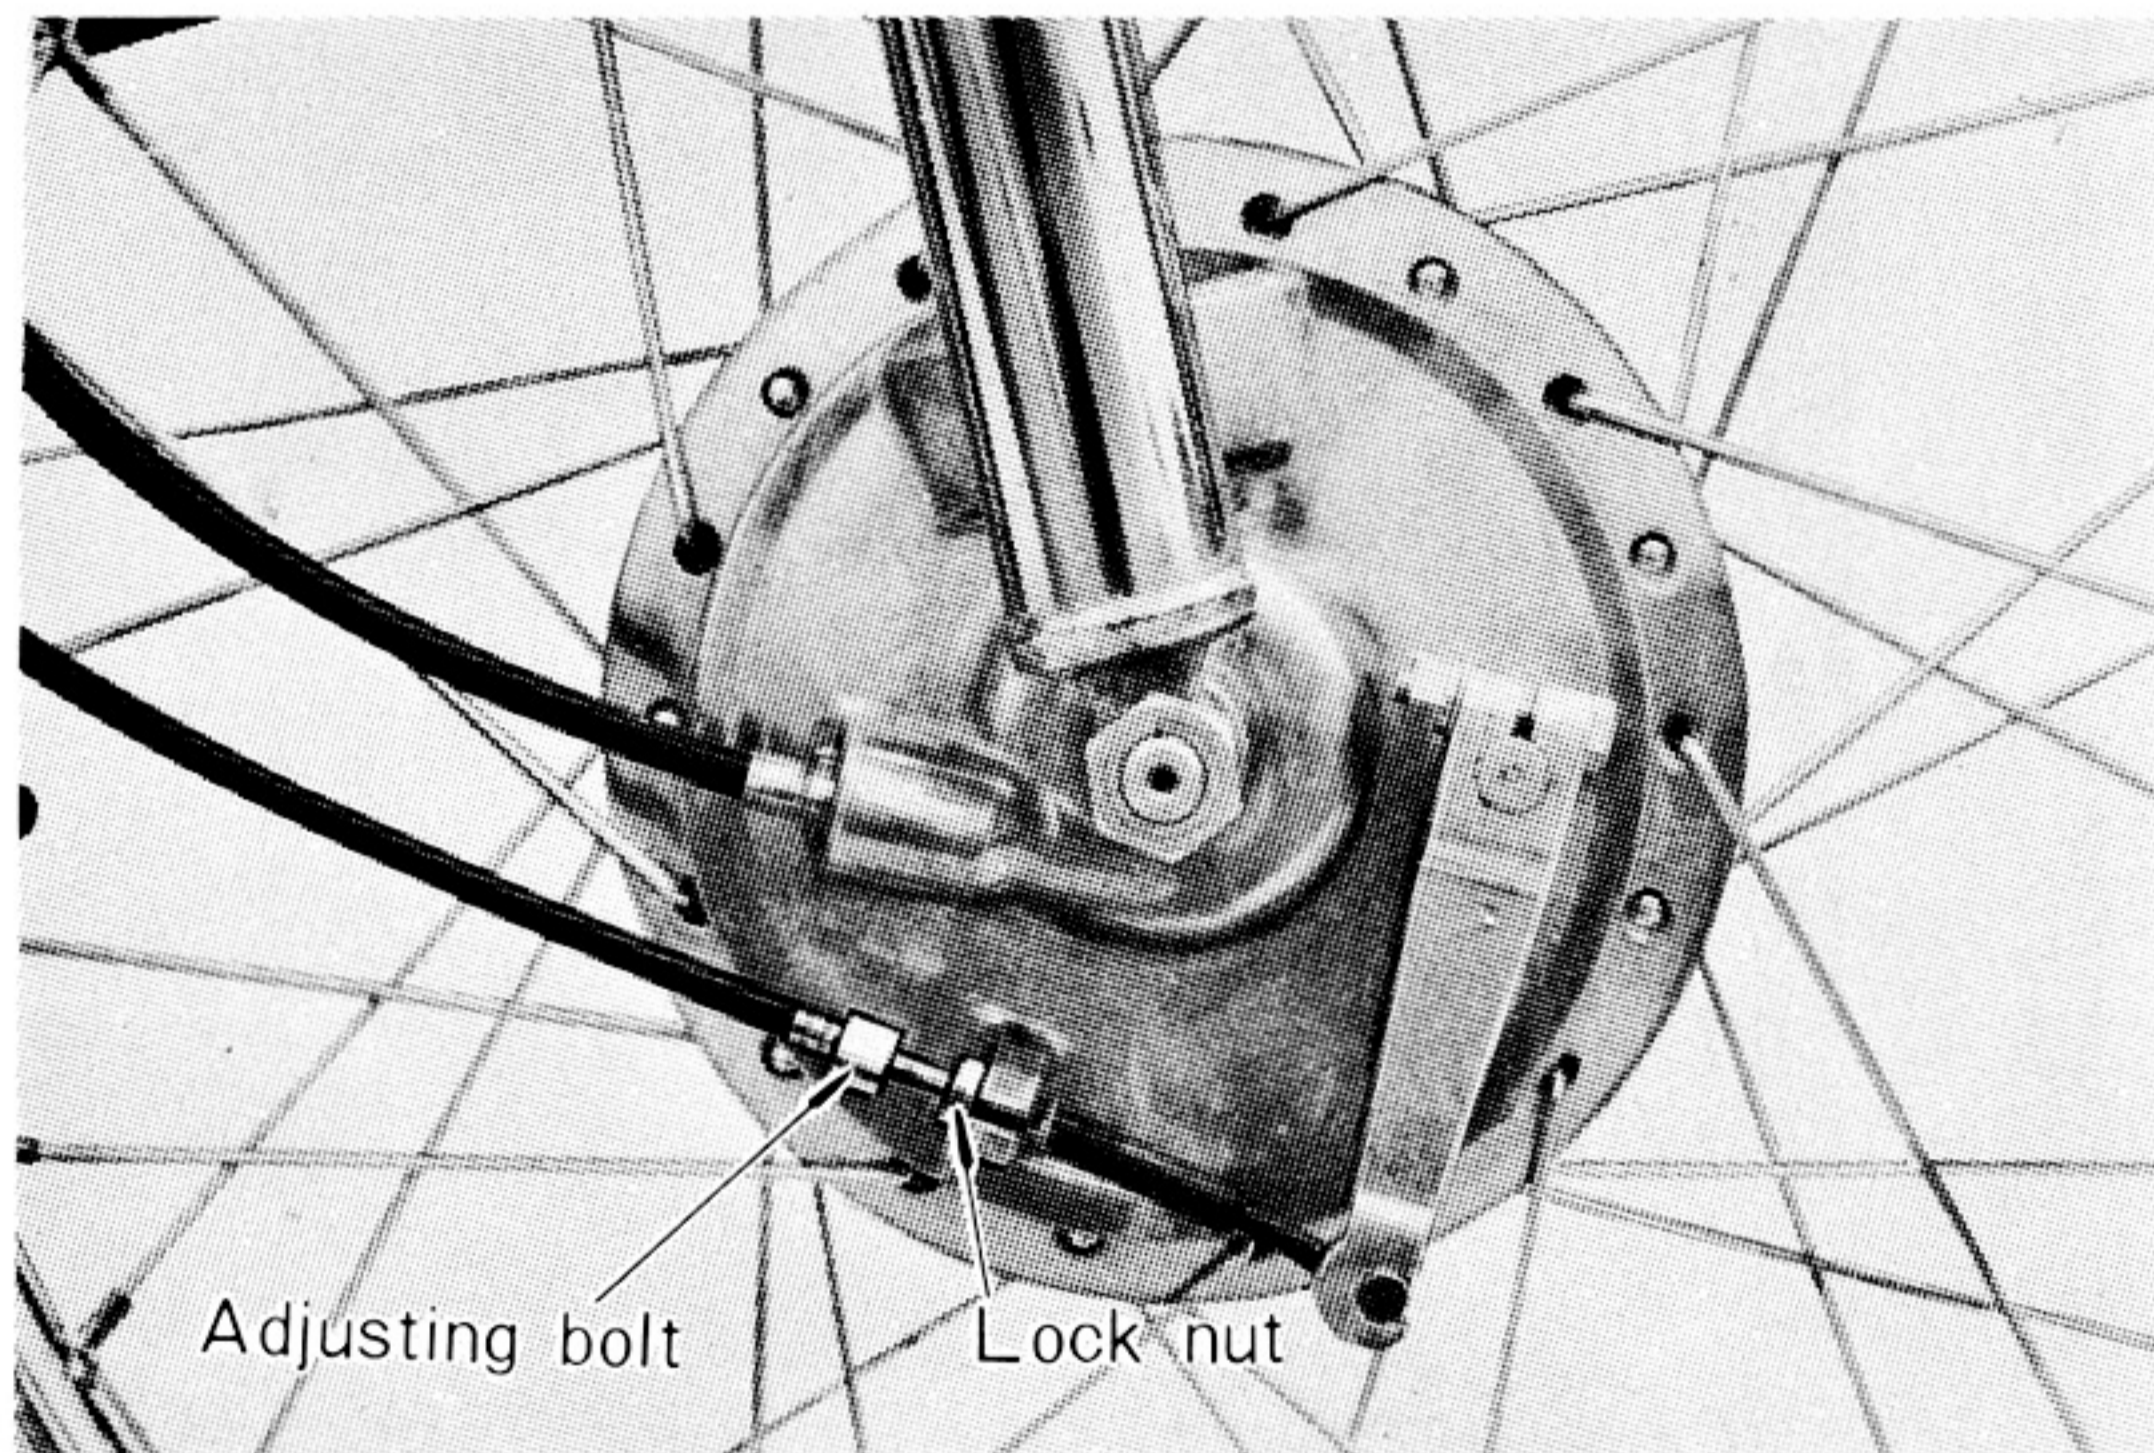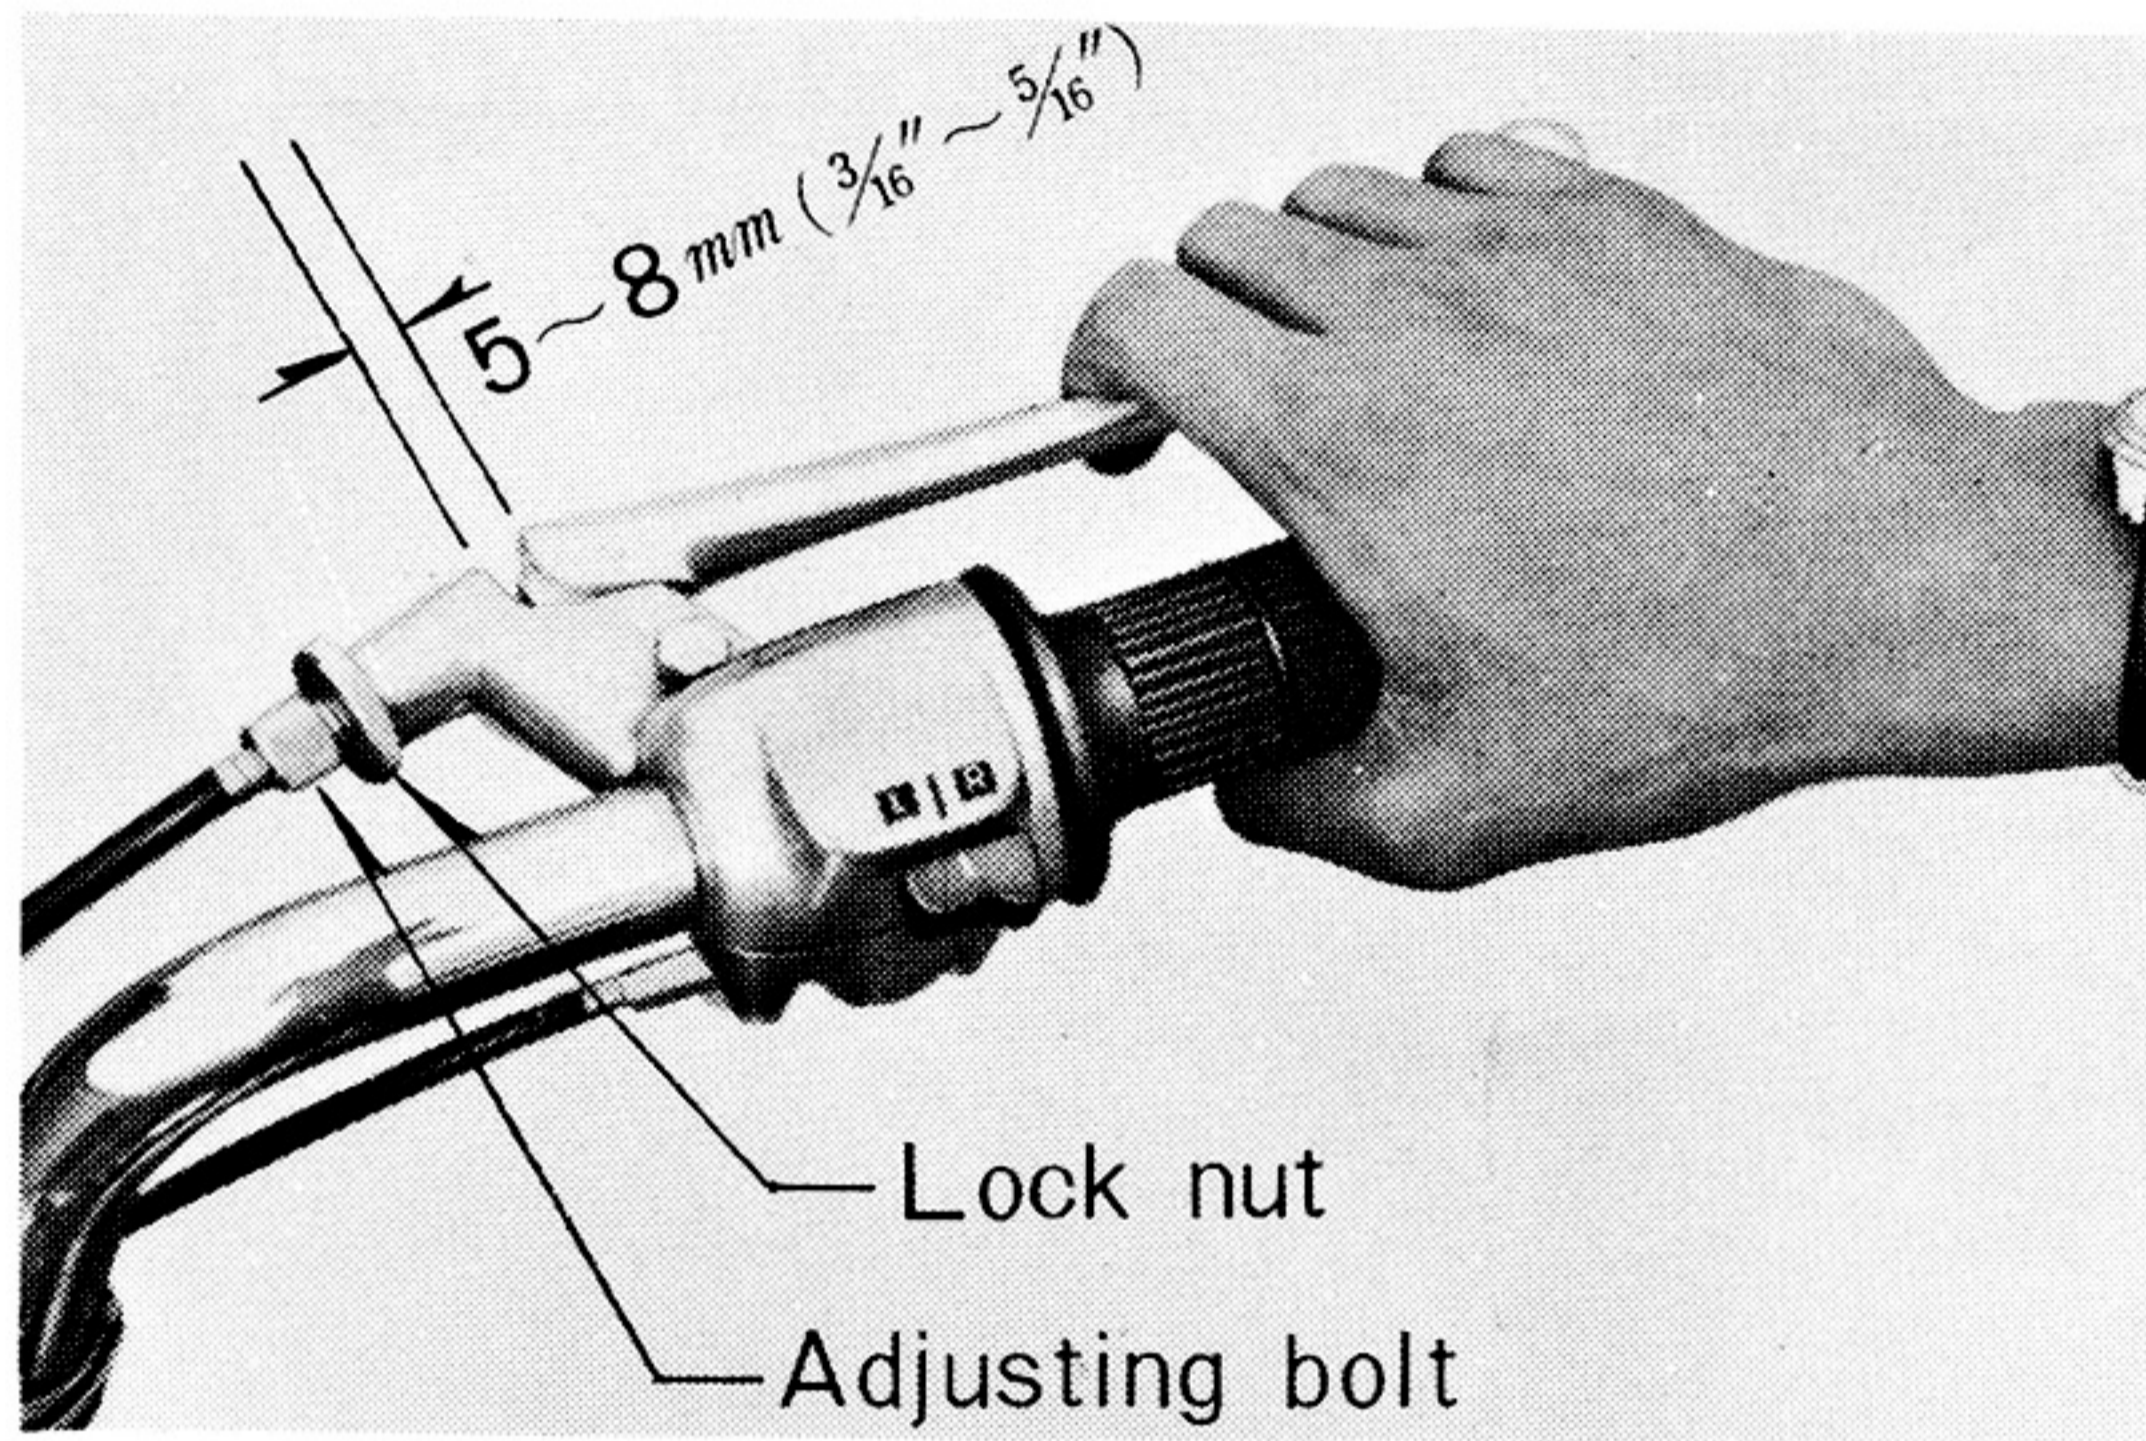

b Rear Brake

The correct end play for the brake pedal is 2 to 3 cm (about 1"). Adjust this by turning the adjusting nut at the end of the rear brake cable a half turn at a time. After adjusting the brake, make sure the brake light is working. If not, readjust the stoplight switch.

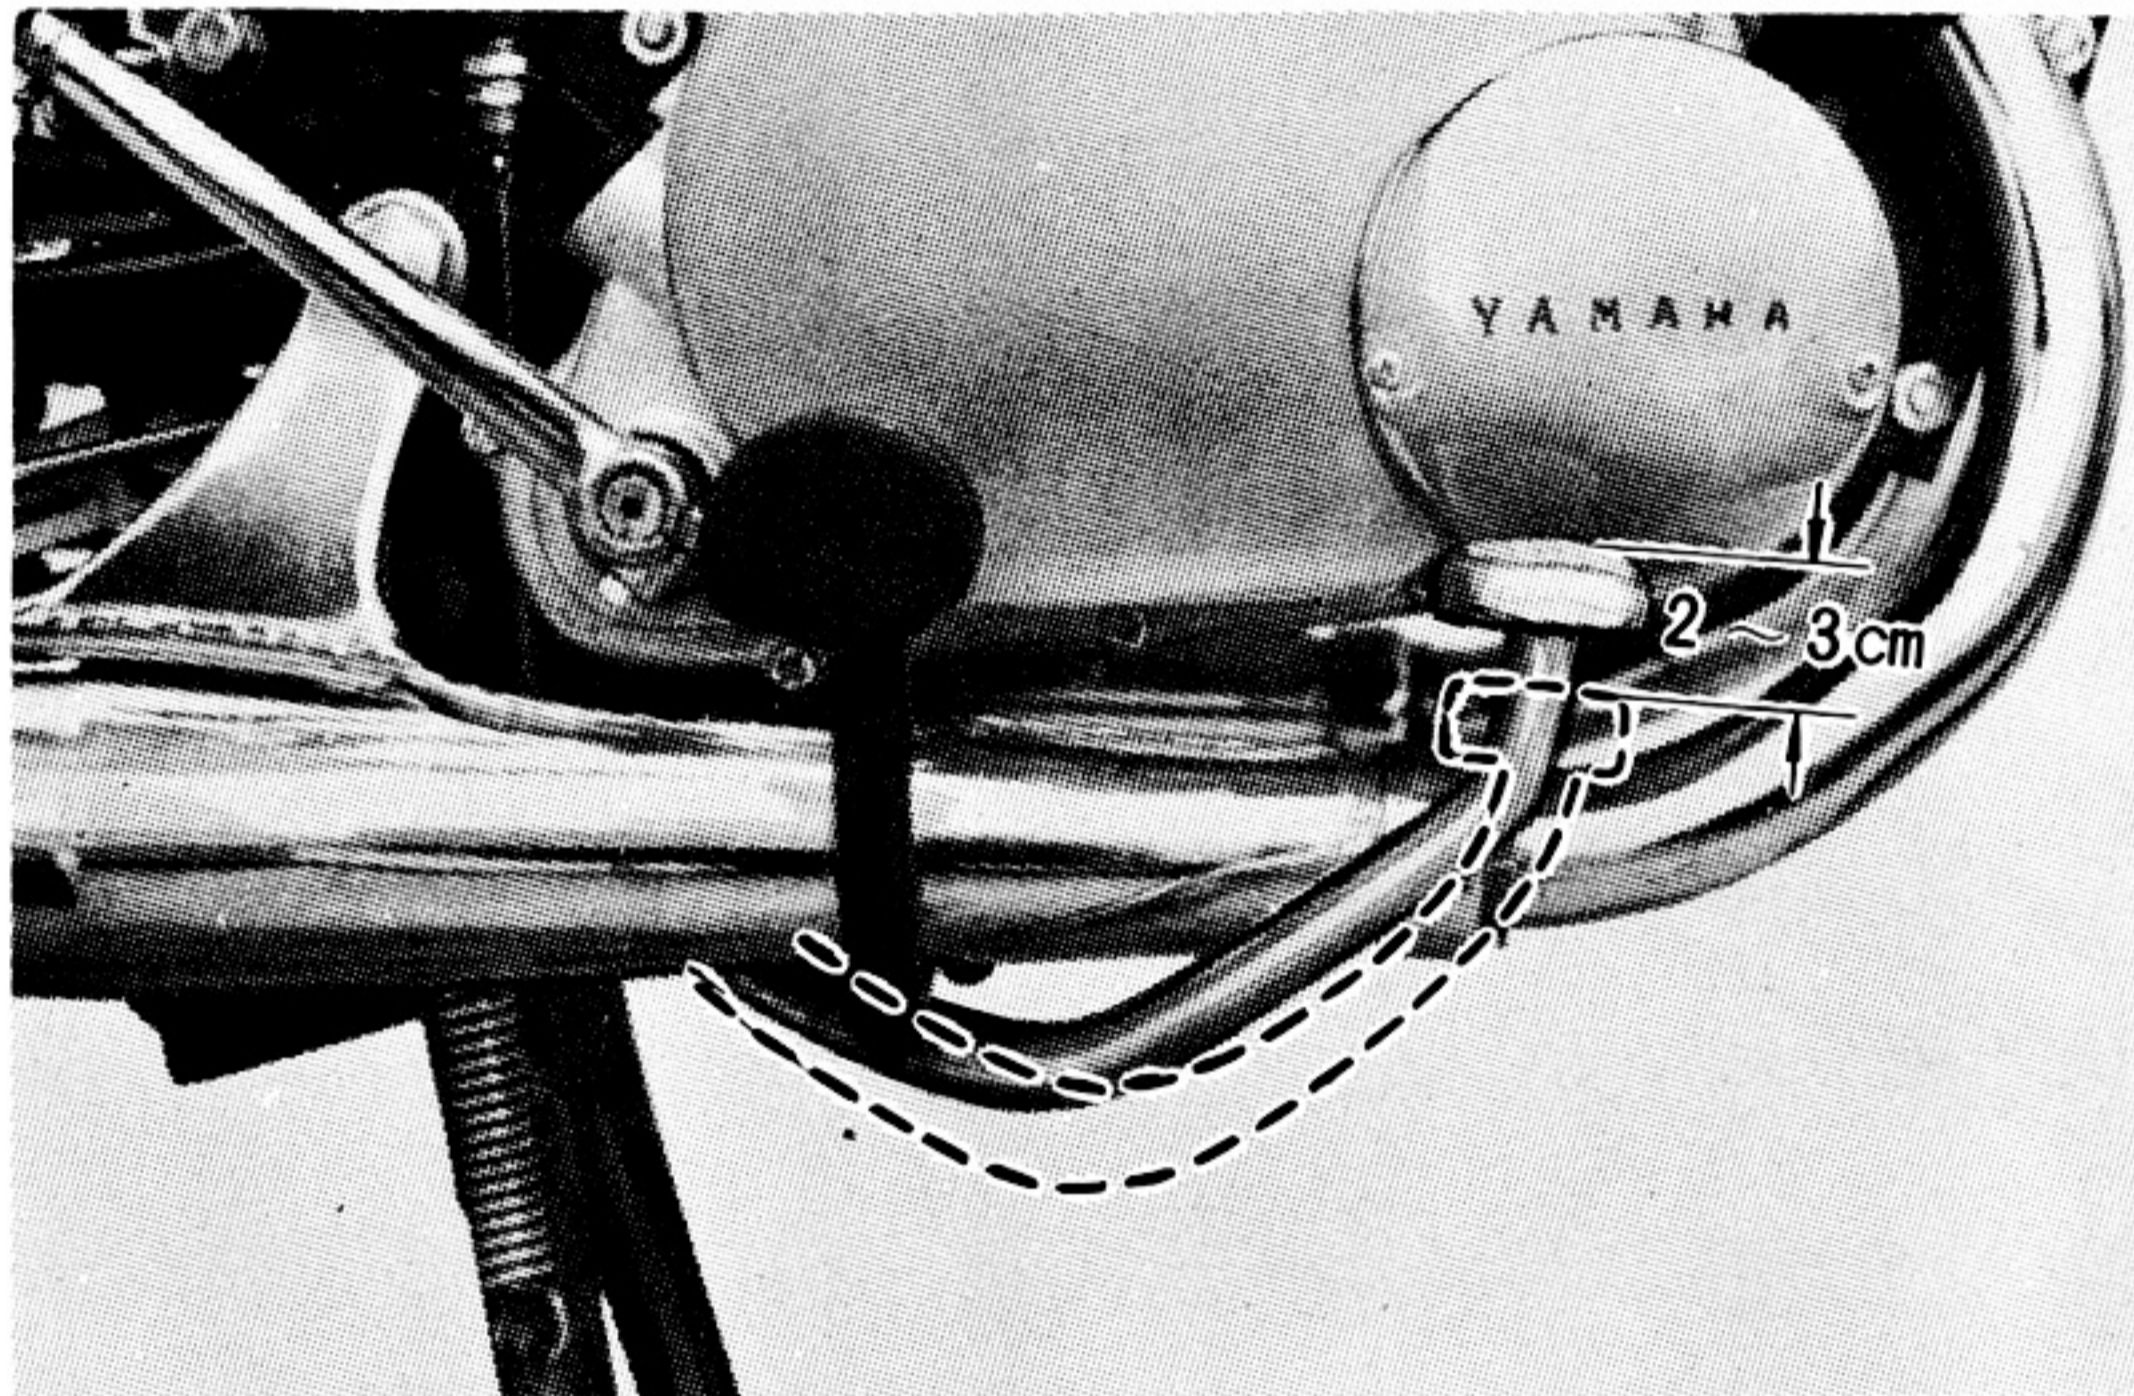

2 Adjusting the Clutch

The clutch lever should be adjusted to have end play.

If there is too much end play, the lever may not disengage the clutch.

If there is no end play, the clutch will slip.


Clutch lever side

1. Loosen the locknut (a)
2. To decrease play, turn the adjusting bolt(b) clockwise. To increase play, turn the bolt counterclockwise.

Crankcase cover side

1. Loosen the locknut (c)
2. To increase play, loosen adjusting screw(d)(counterclockwise)and to decrease play, tighten the nut (clockwise)

When your adjustment is correct, tighten locknut(a or c).

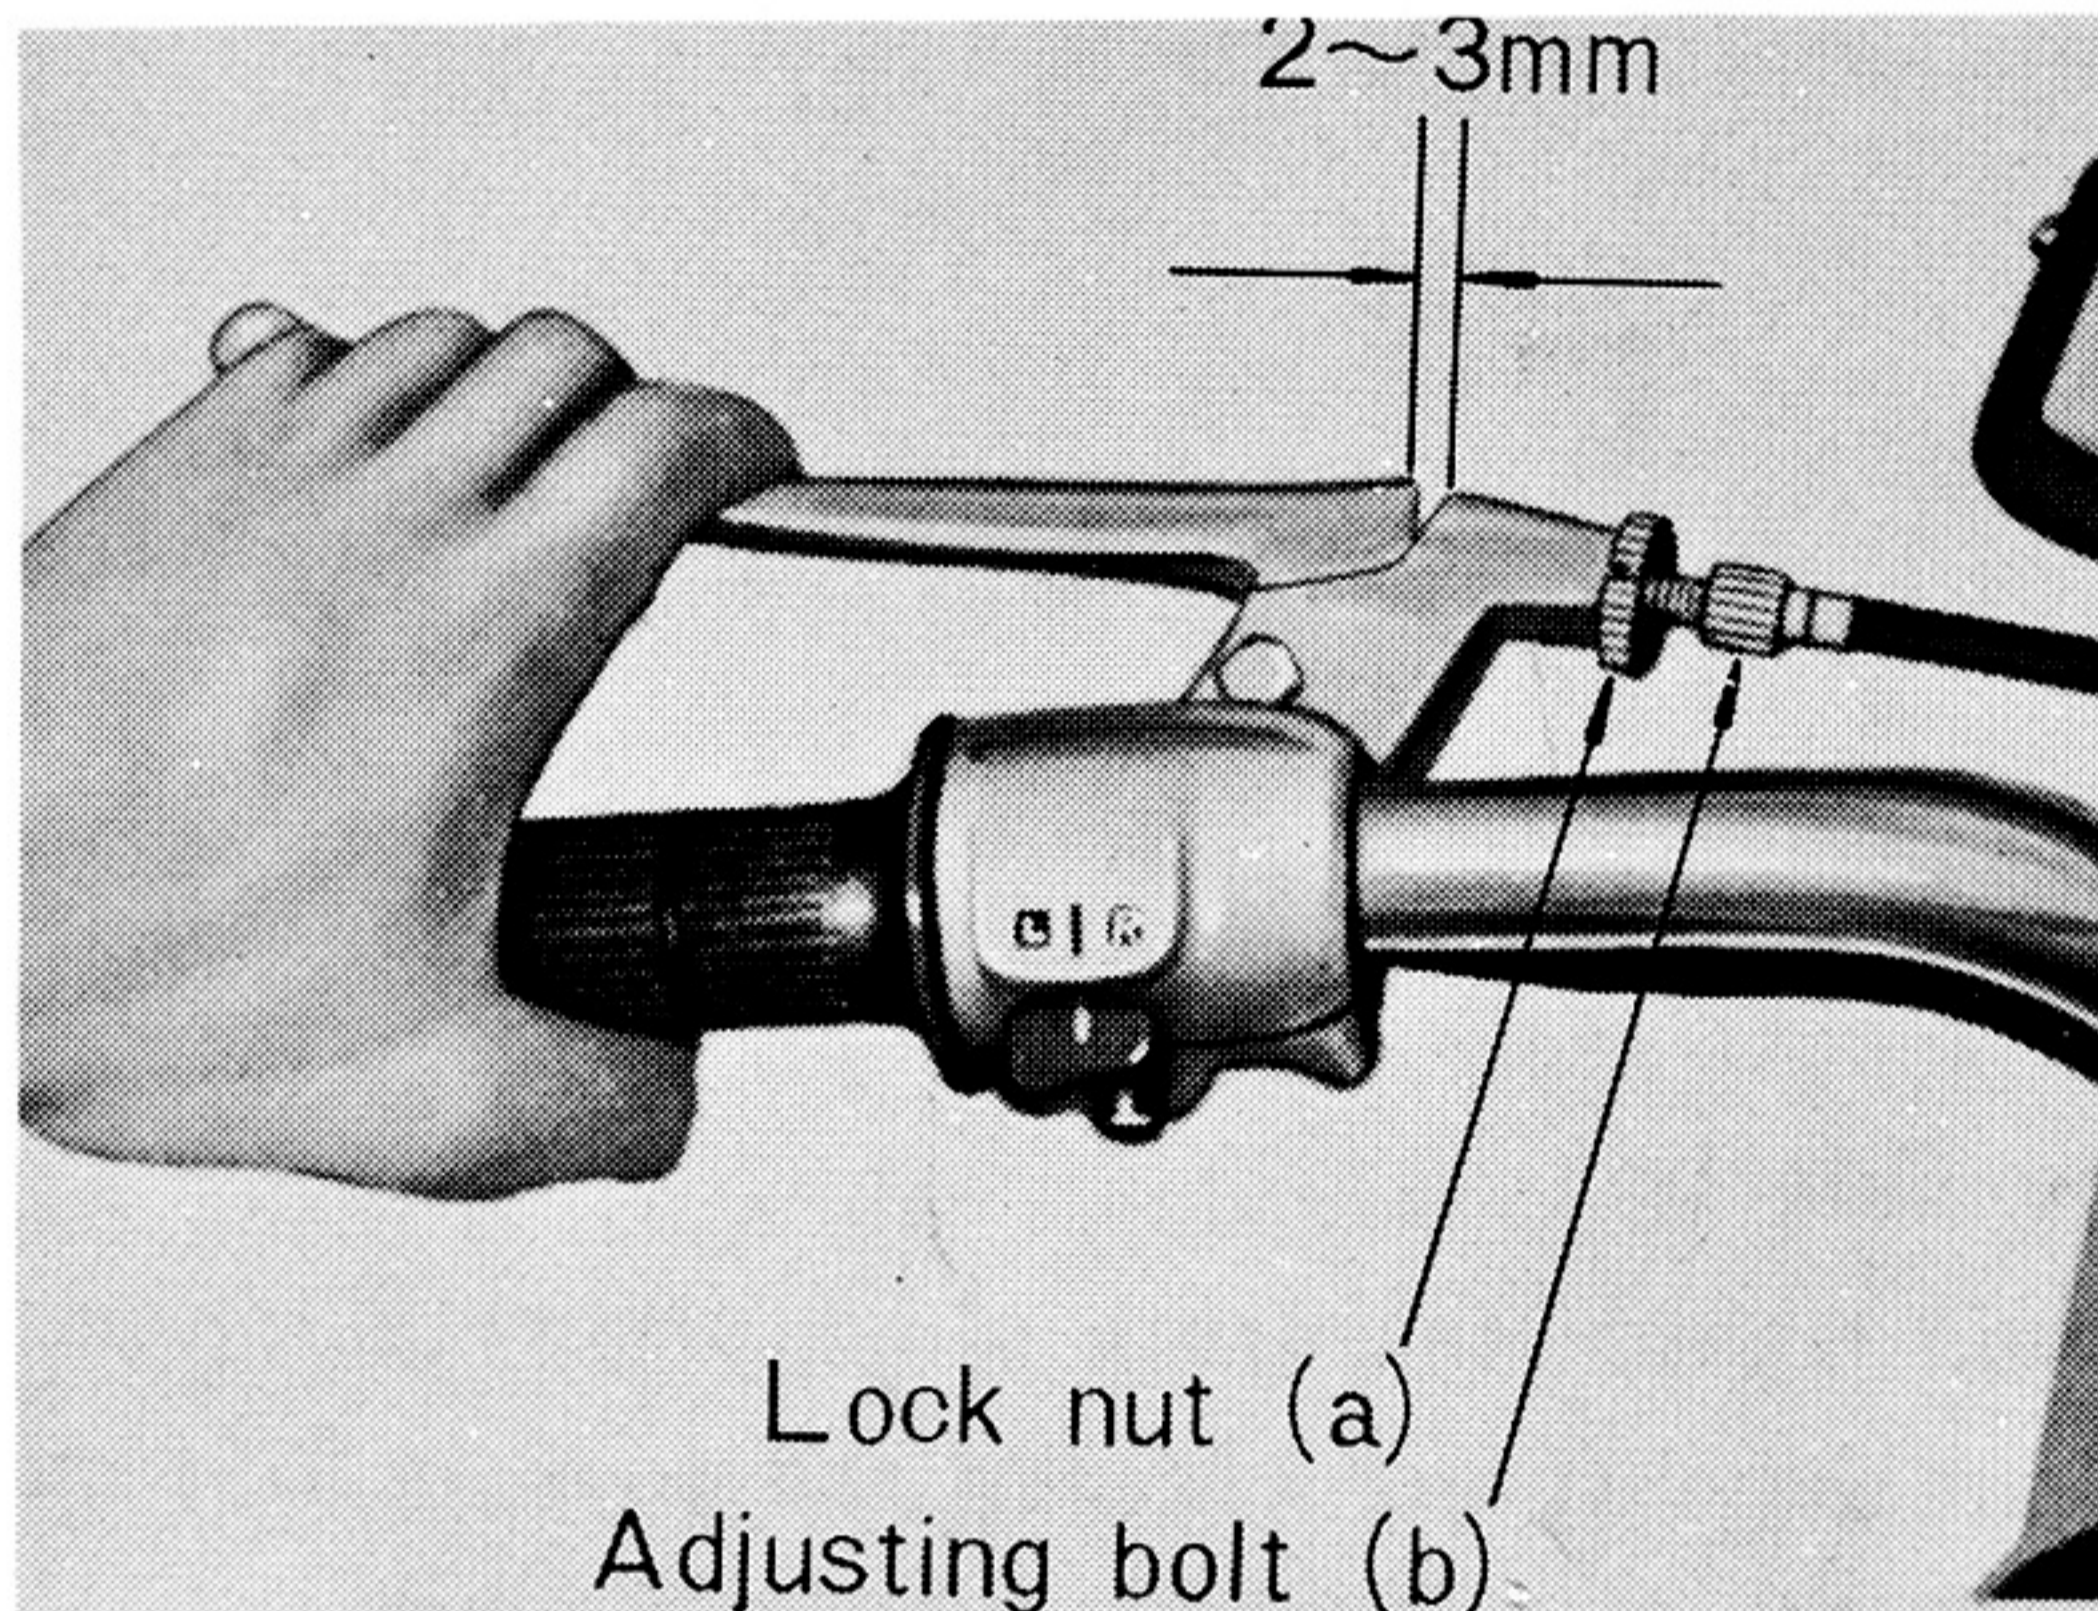


3 Gearbox Oil

Be sure to change the gearbox oil at 300, 1,000 and 3,000 miles and every 2,000 miles thereafter. Use SAE 30 MS or SAE 10-20-30 MS oils.


a Draining the Gearbox

To drain the oil, remove oil drain plug on the bottom of the engine and in the left crankcase cover.

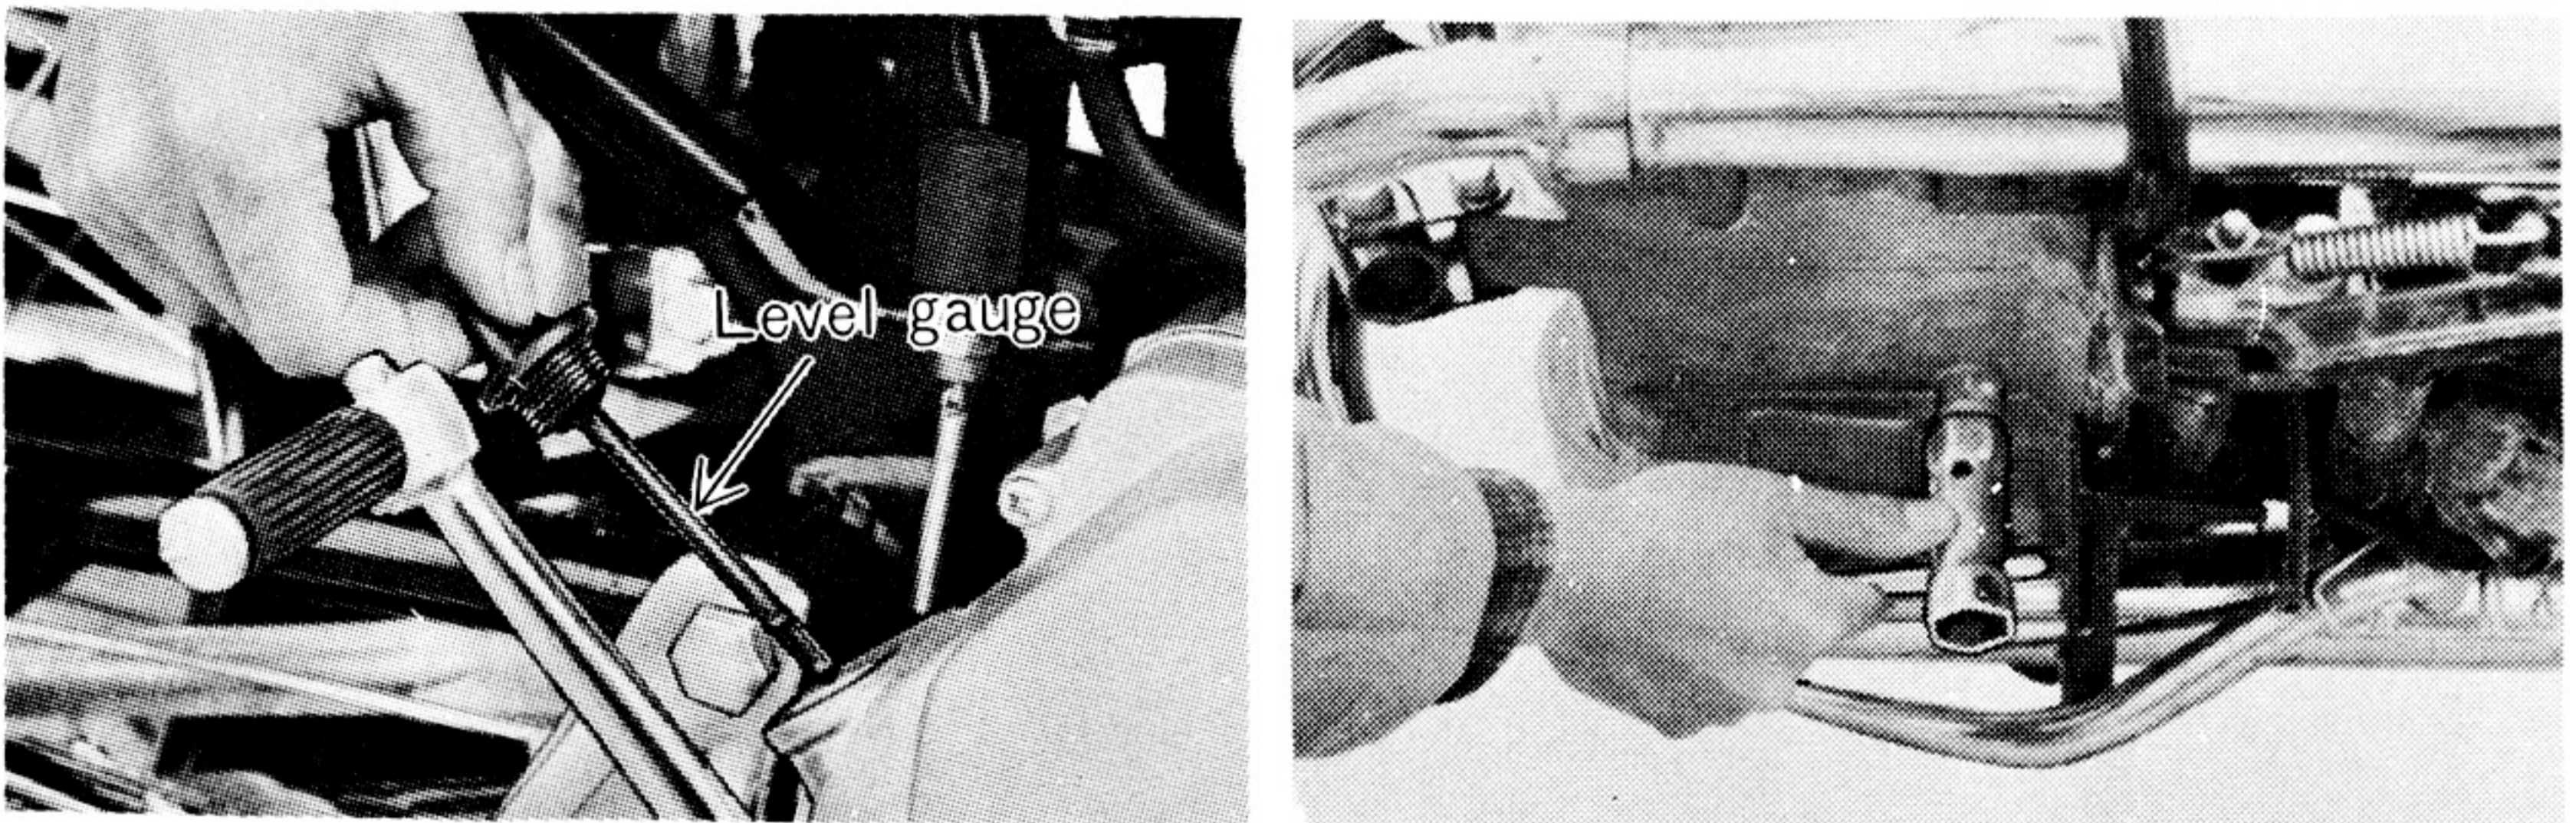


b Refilling the Gearbox

After draining, tighten the drain plugs securely. Remove the oil filler cap near the left air cleaner and pour in 0.94 quarts of oil.

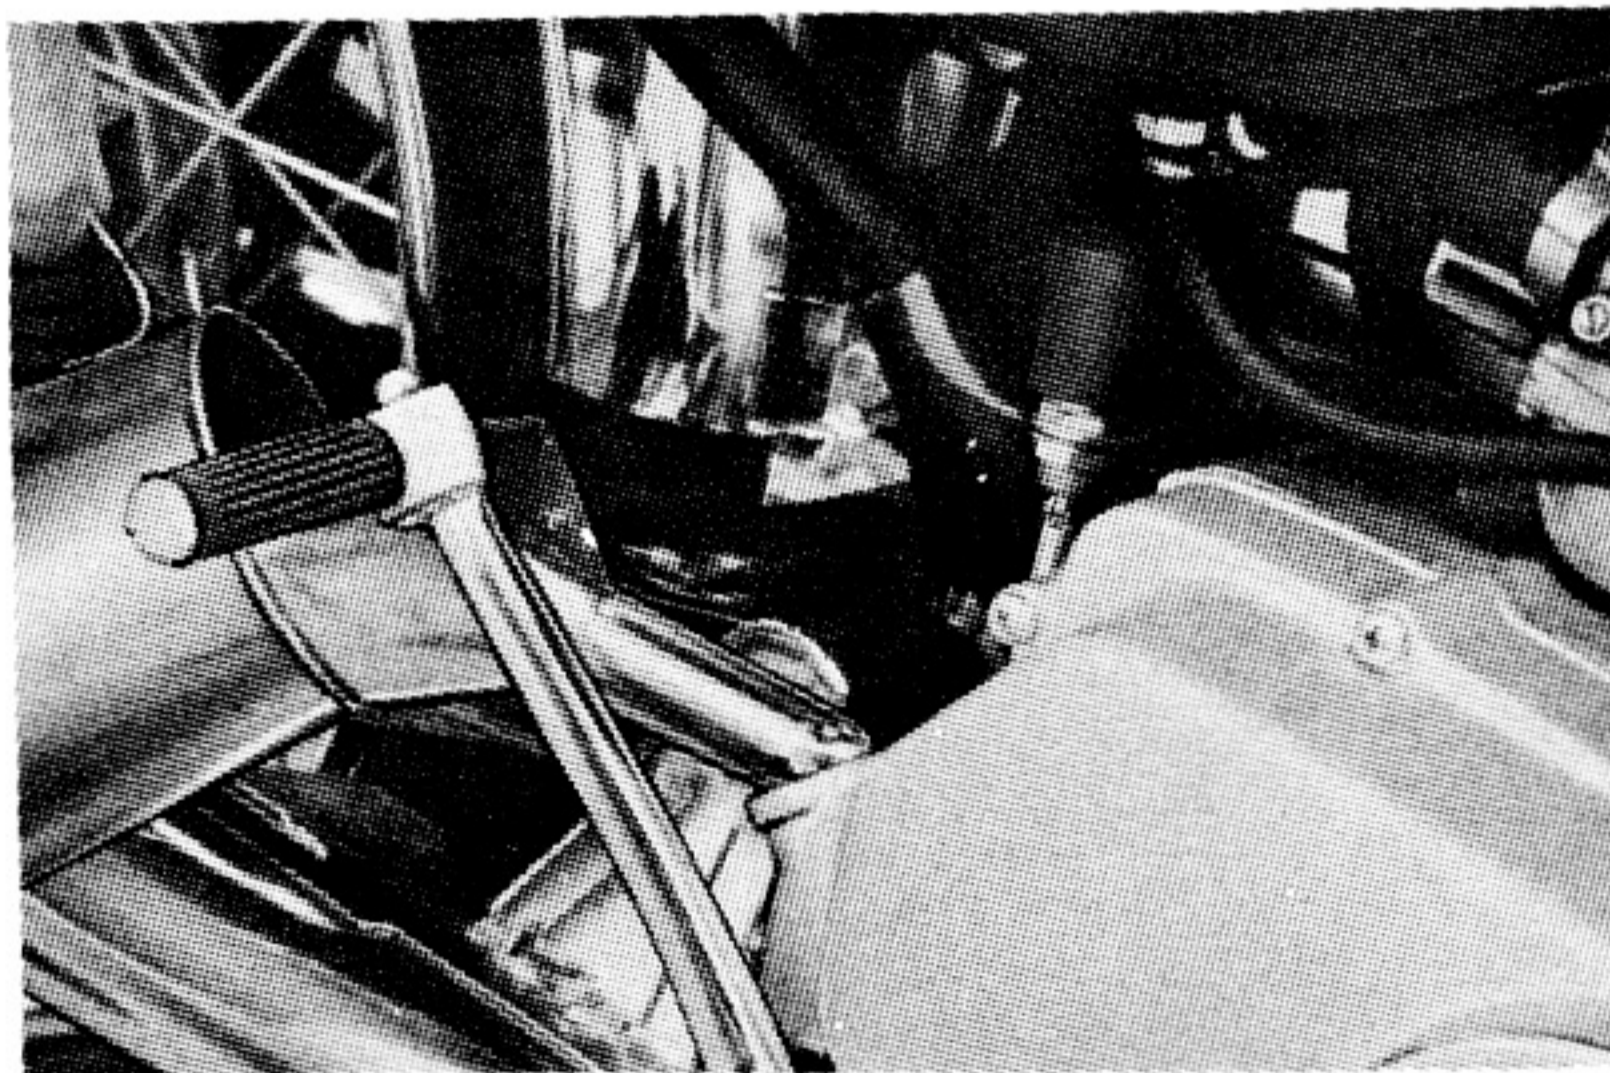


4 Battery

The battery fluid should always be kept between the upper and lower level lines. If it is below the lower one, fill it with distilled water up to the upper one.

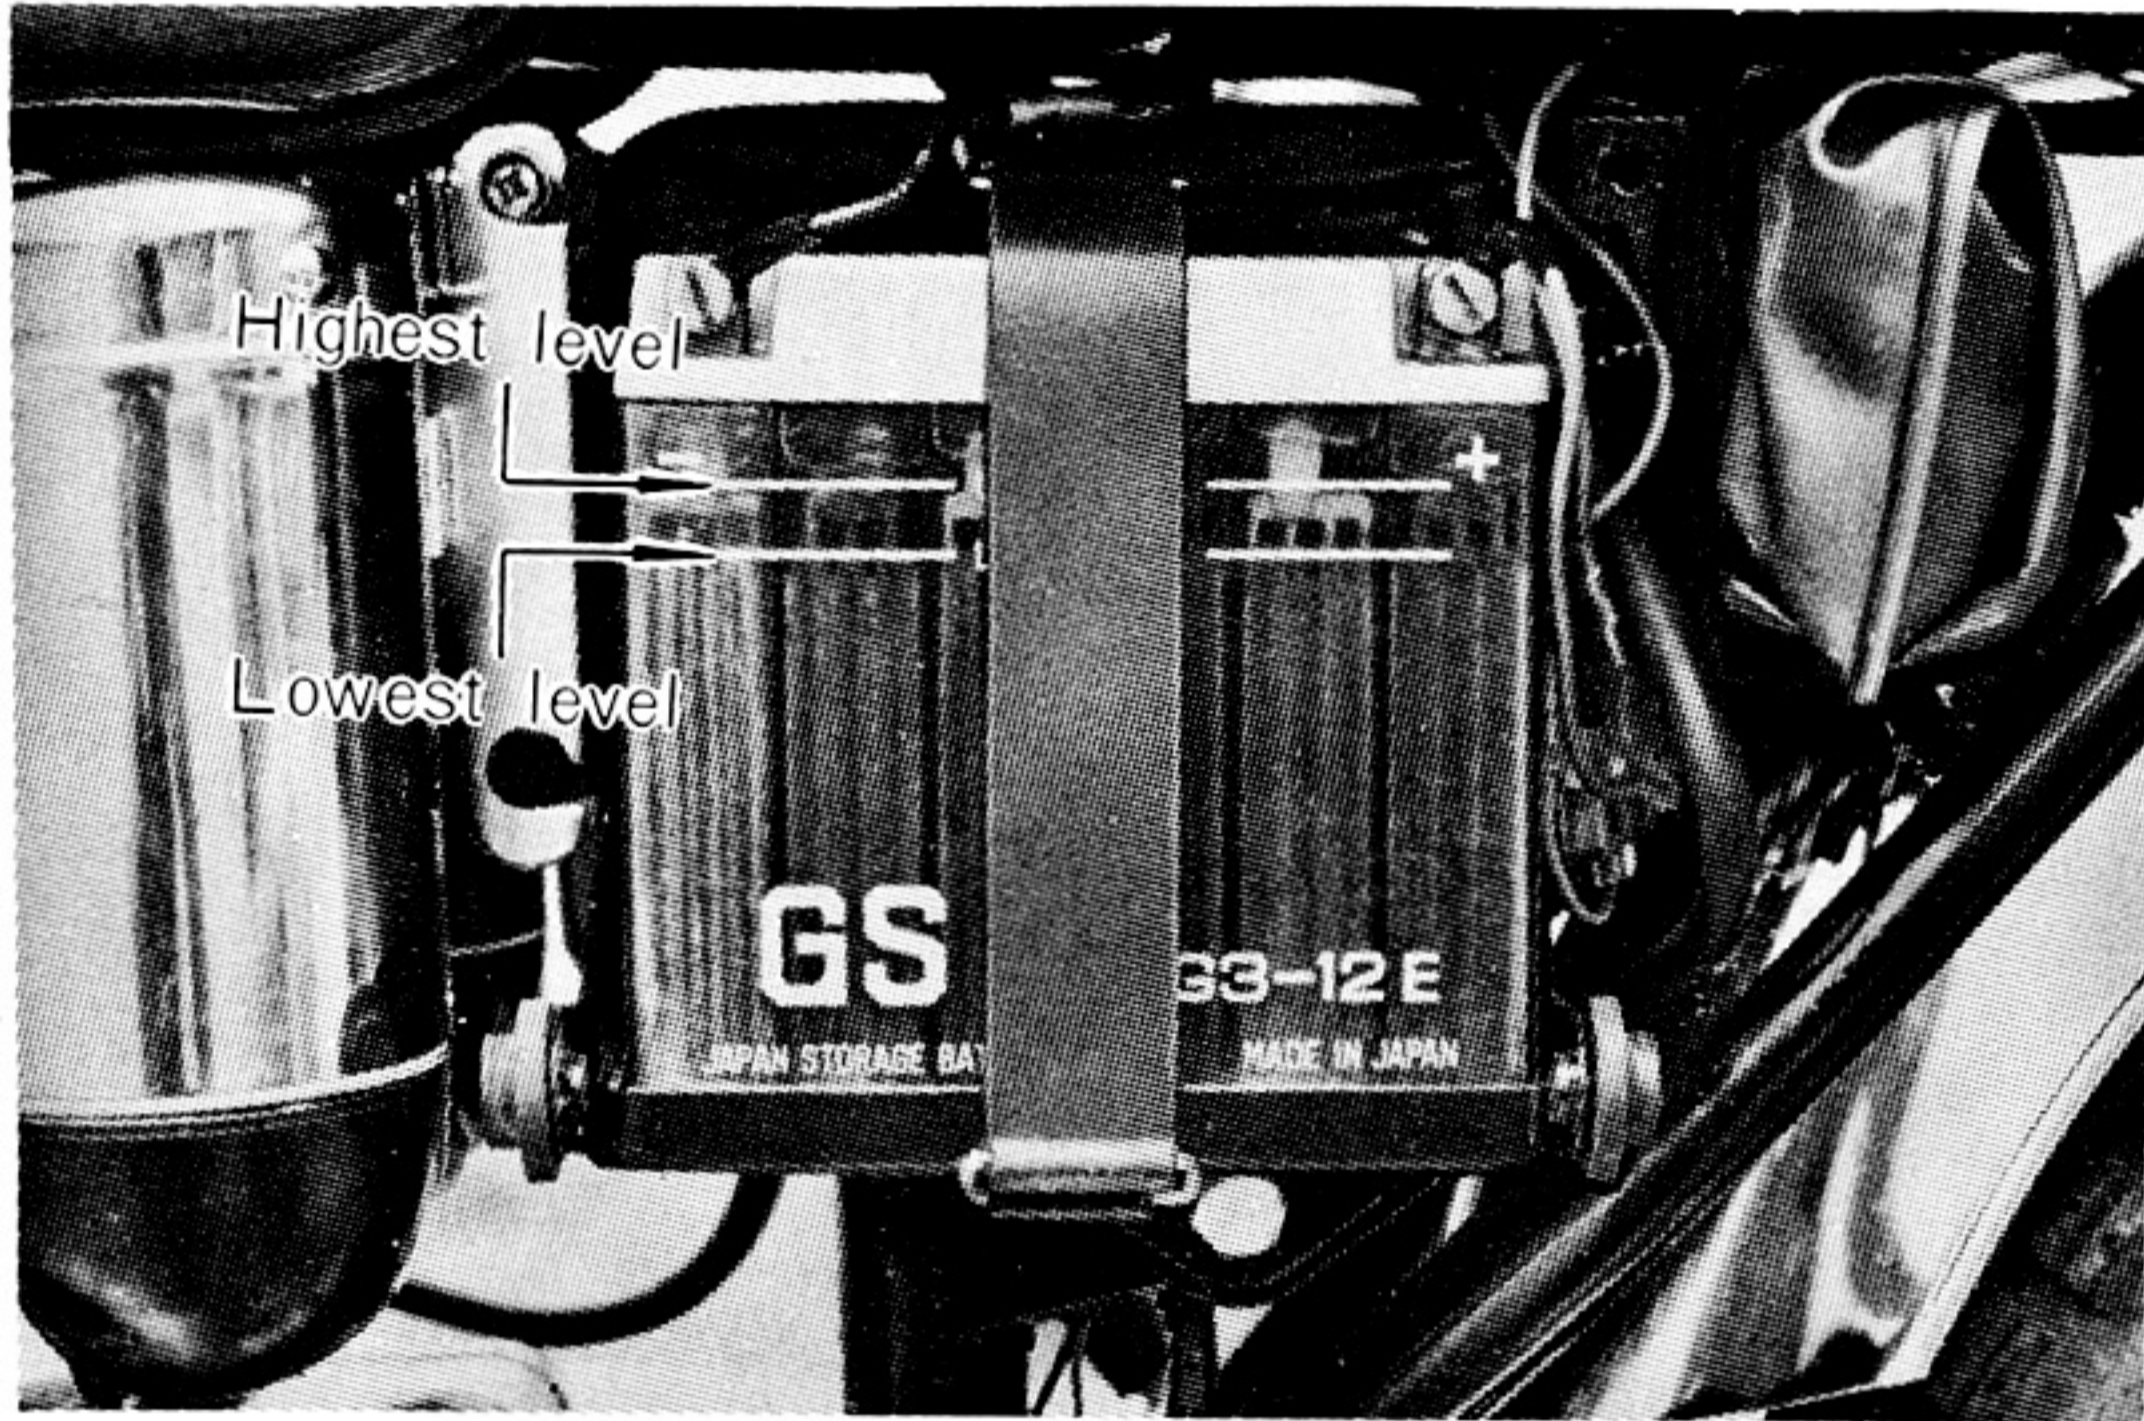

Check to see that the overflow tube is not clogged.

If your motorcycle will not be in use for more than a month, remove the battery and keep it in a dry cool place, or give it to your dealer to keep for you. Be sure to have your dealer charge it once a month.

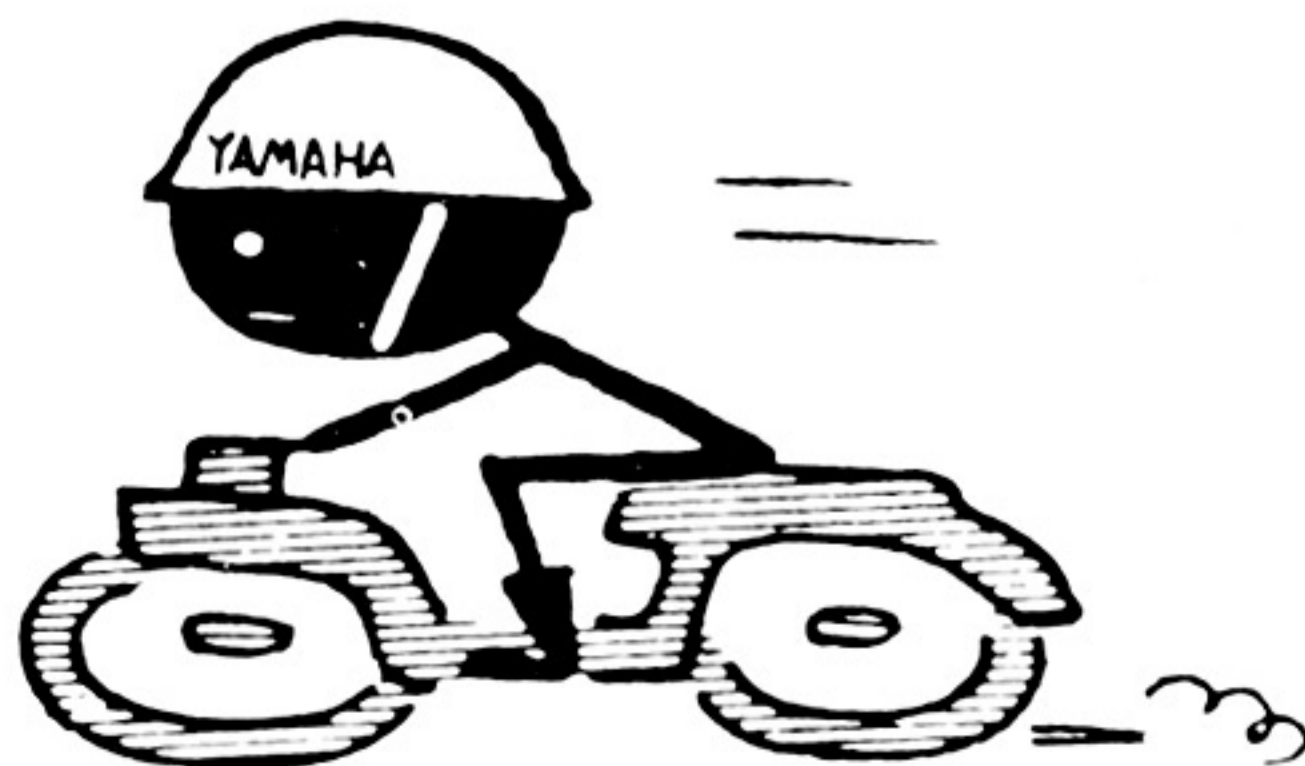



5 Spark Plugs

A spark plug ignites the fuel-air mixture in the cylinder. Carboned or oiled plugs cause hard starting, misfiring and other problems. Remove carbon from the electrodes with a wire brush from time to time.

a **Spark Plug Gap:** The correct gap is . (0.5~0.6 mm)




b **Heat Range:** The standard plug is an NGK B-8HC.

The spark plug will be covered with carbon if it is too cool for operating conditions. If the plug is correct, the insulator will be relatively clean and have a tan color. If the standard plug is too cool, use an NGK B-7HZ.

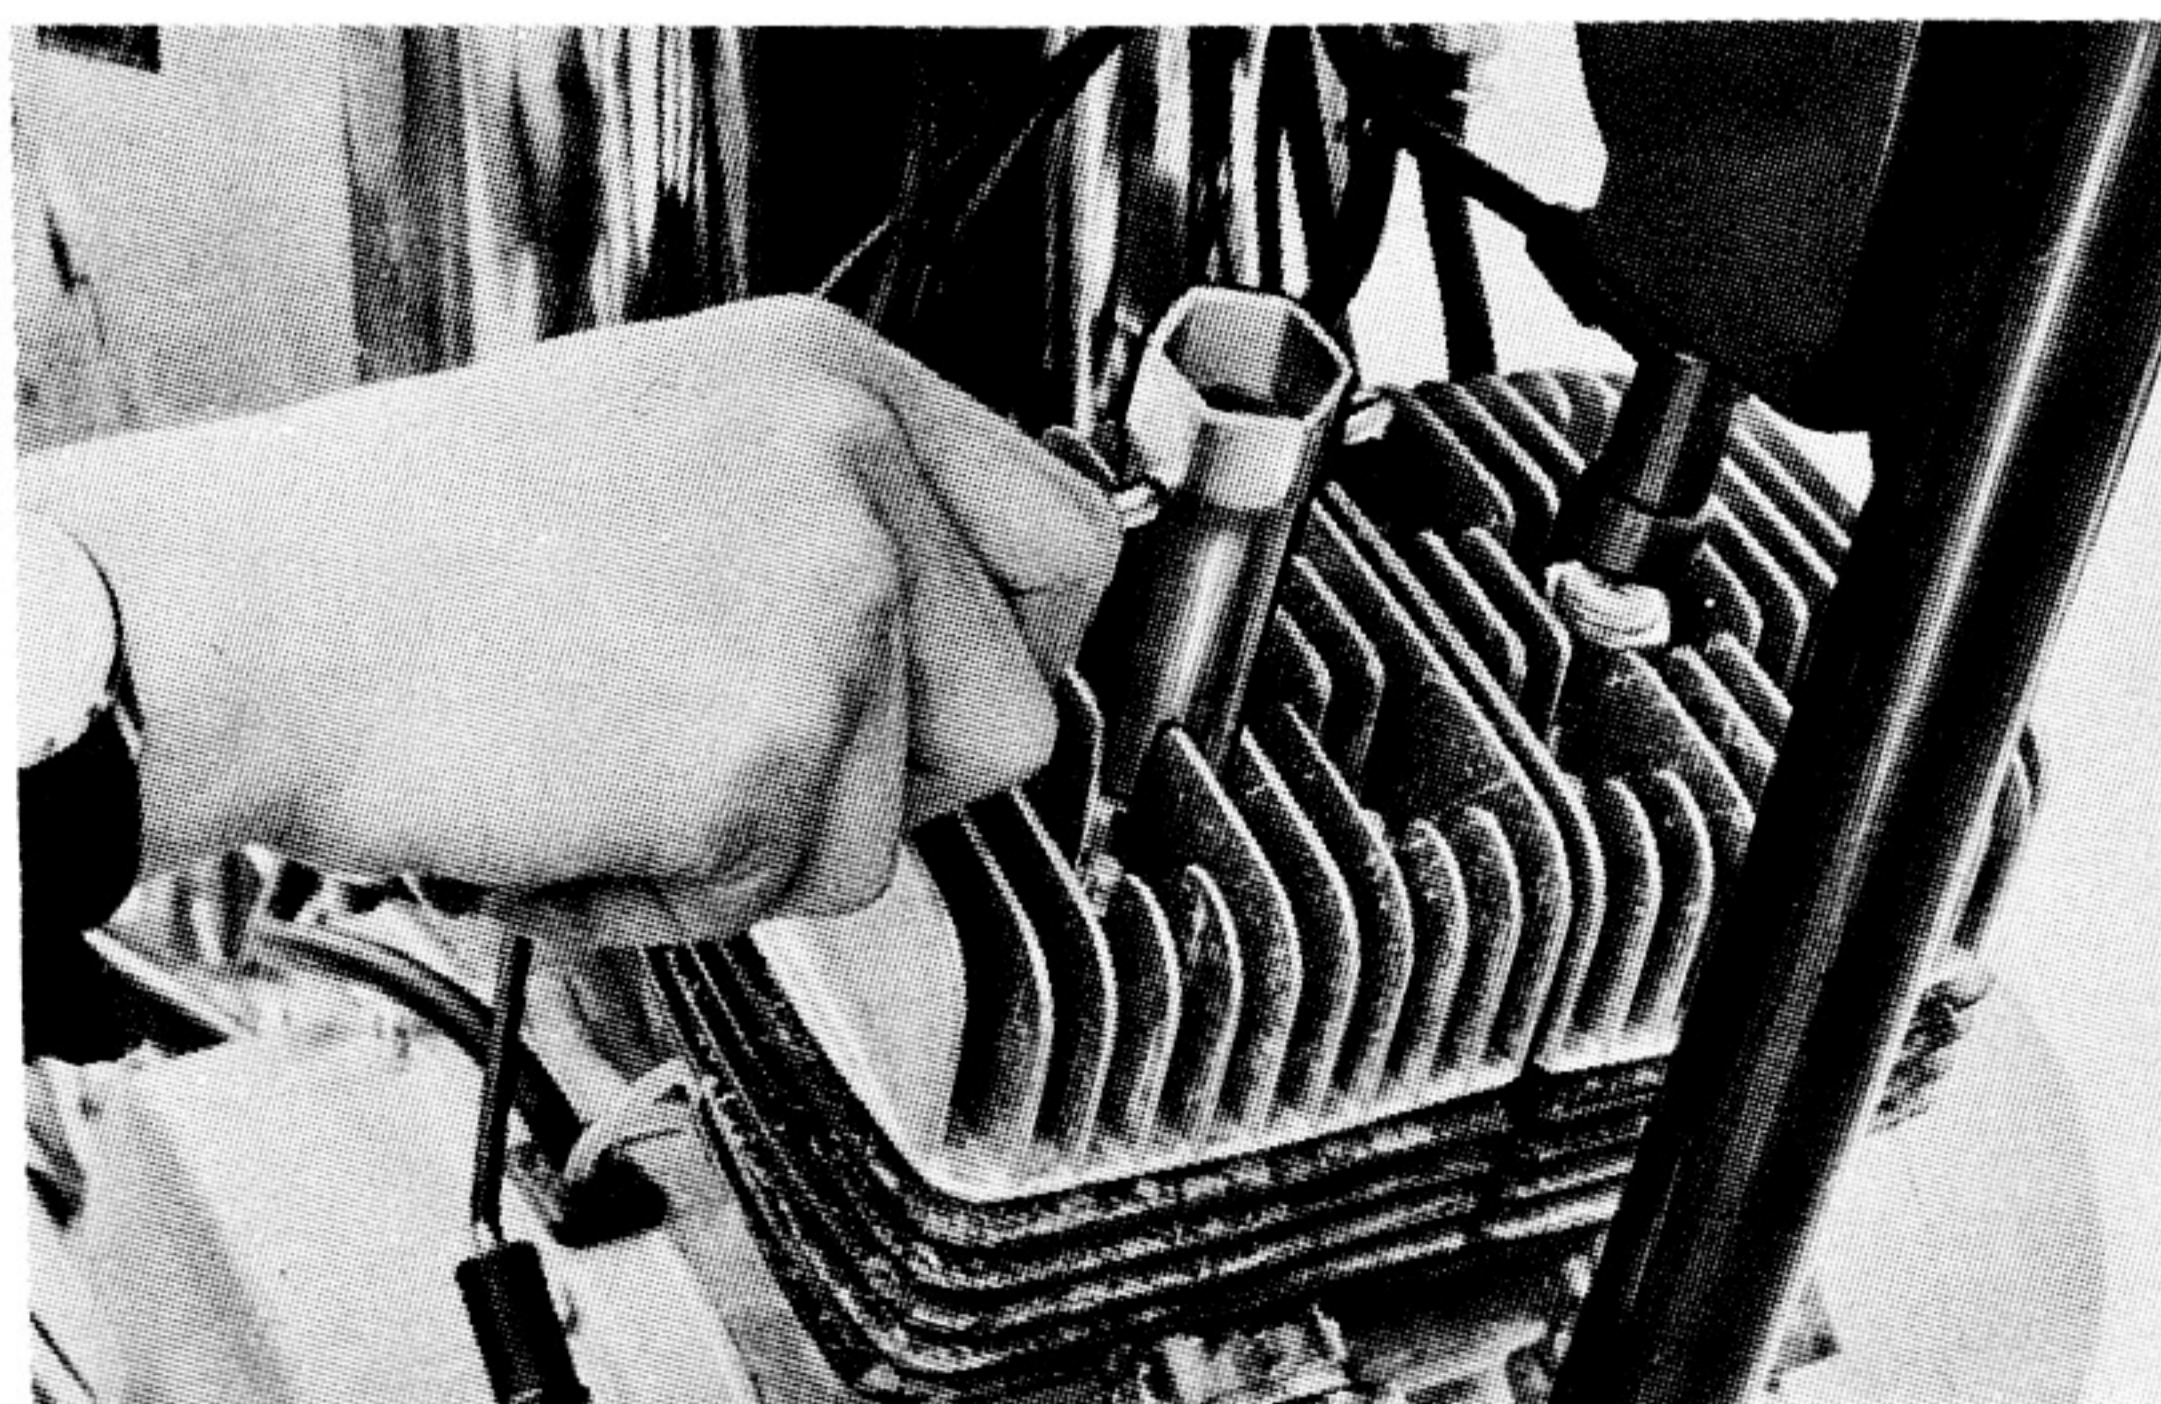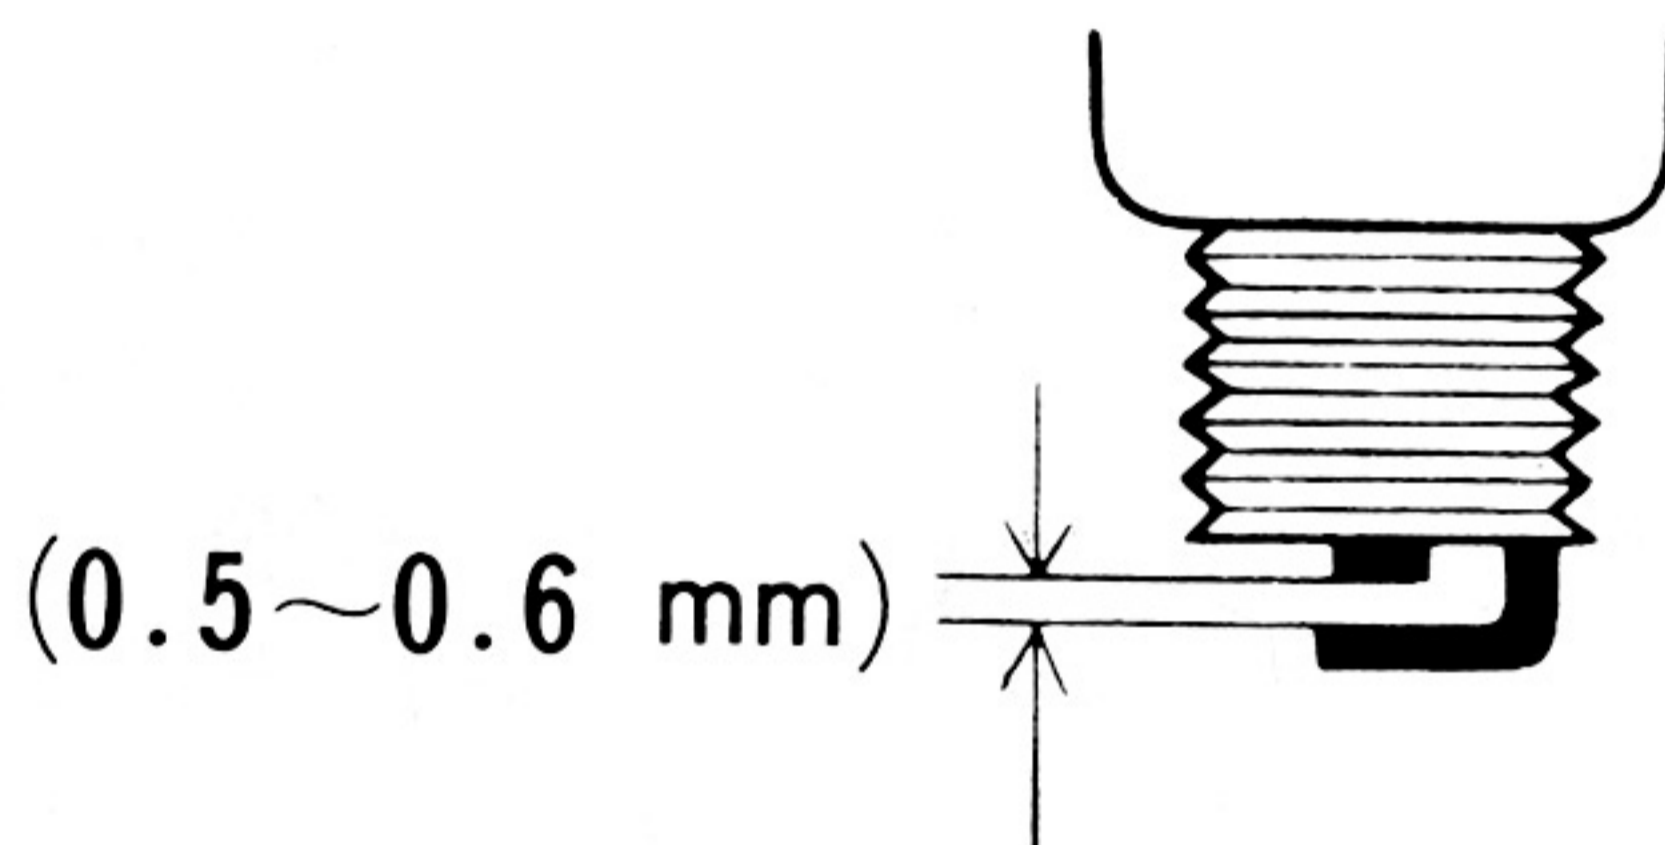

6 Air Cleaner

An air cleaner excludes dust and dirt from the engine. It must be clean at all times. If you drive often on dirt roads, be sure to clean it at least once a month.

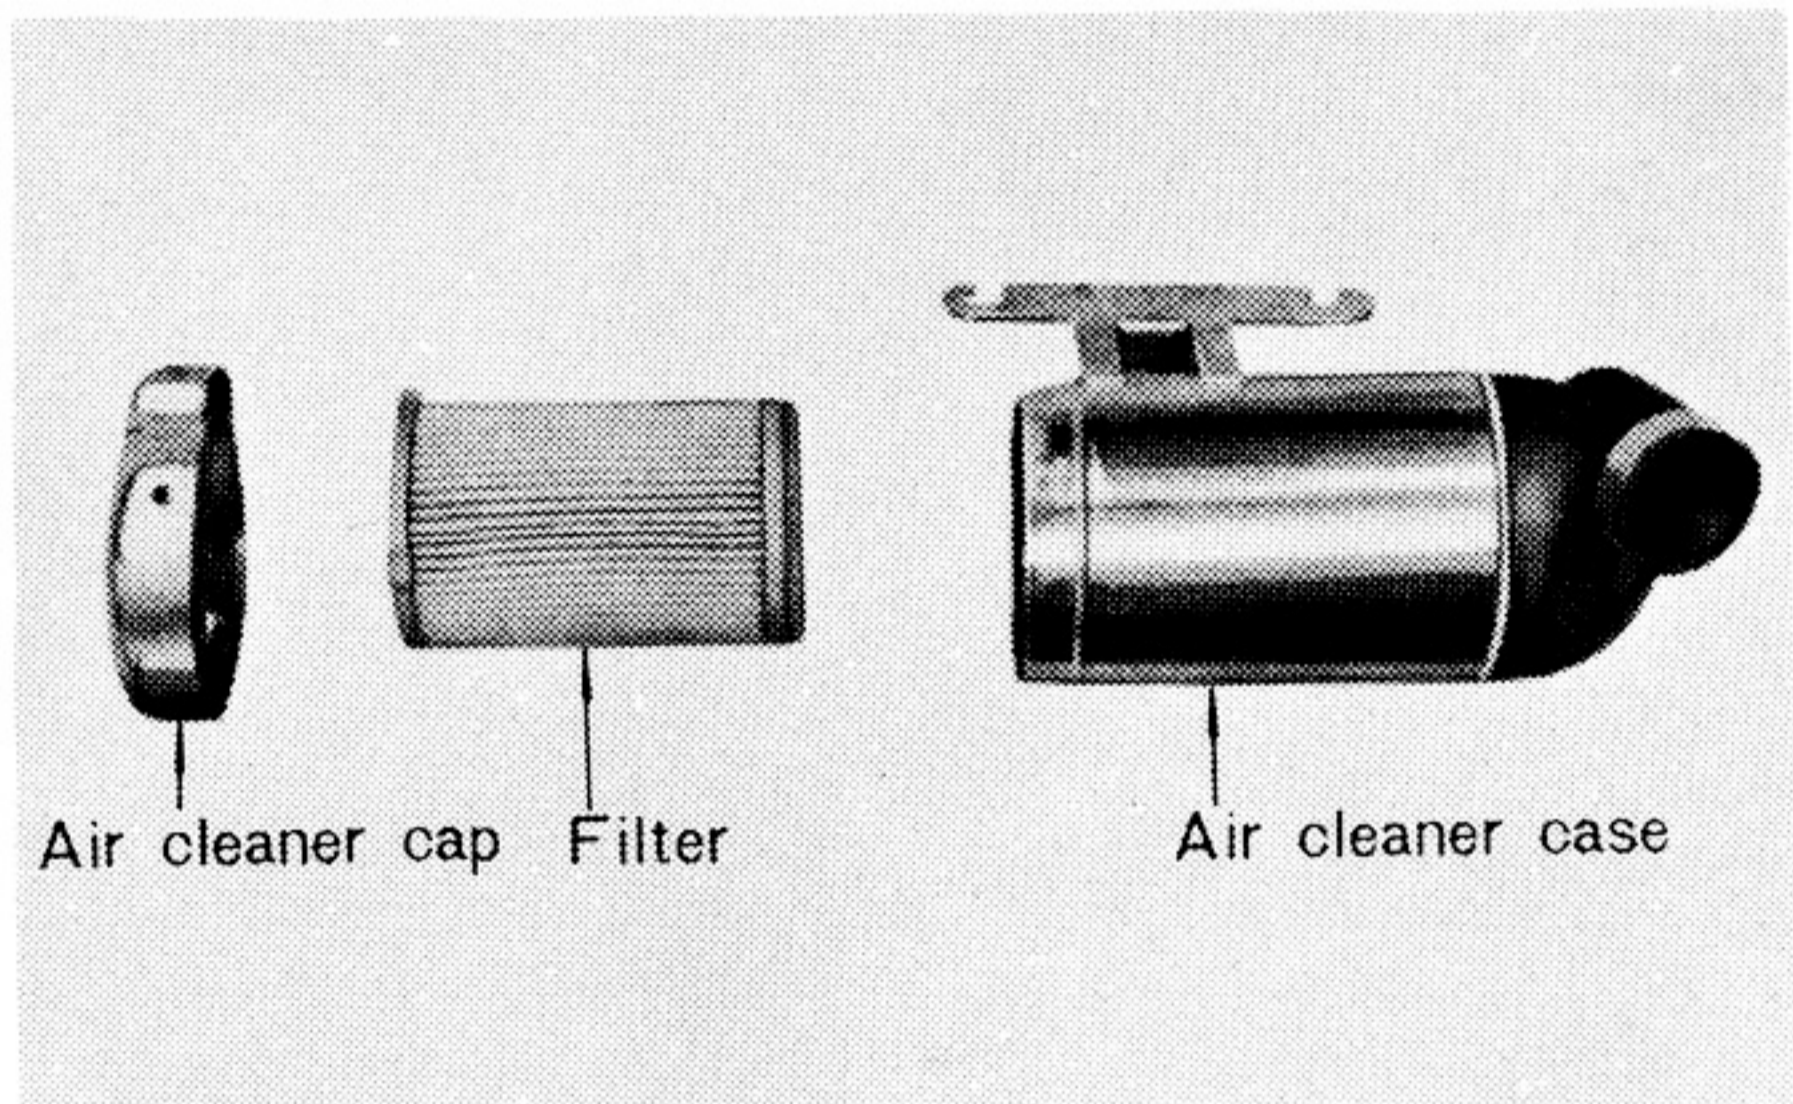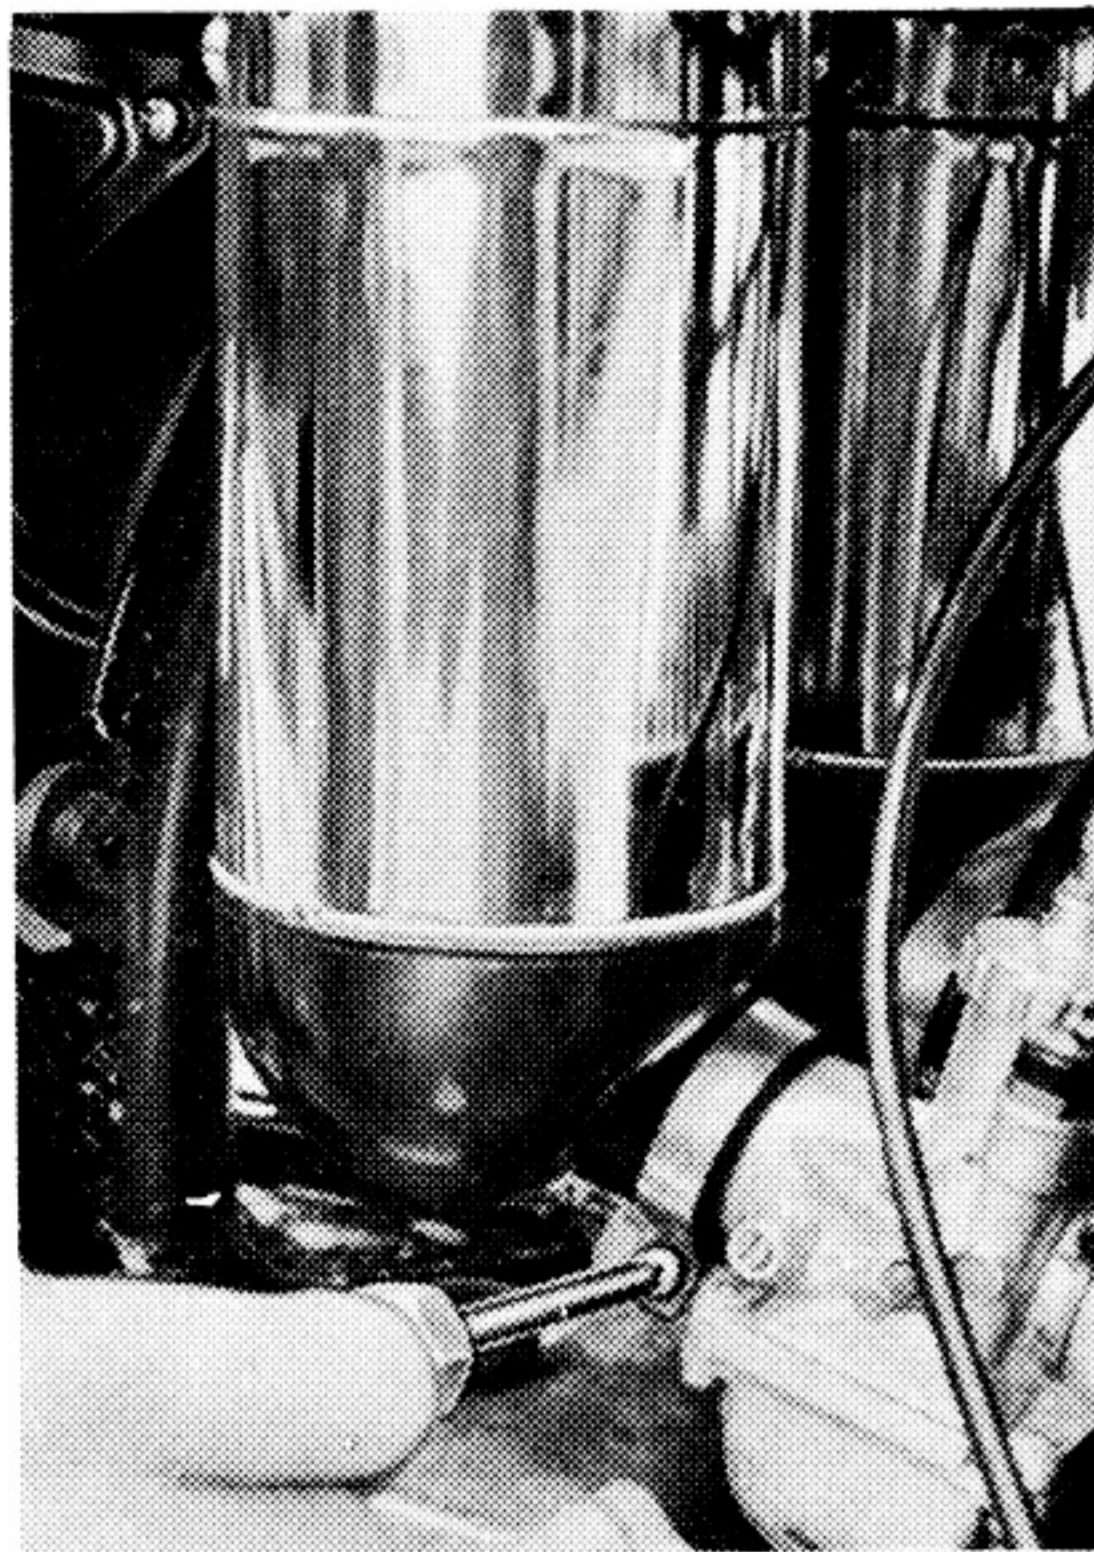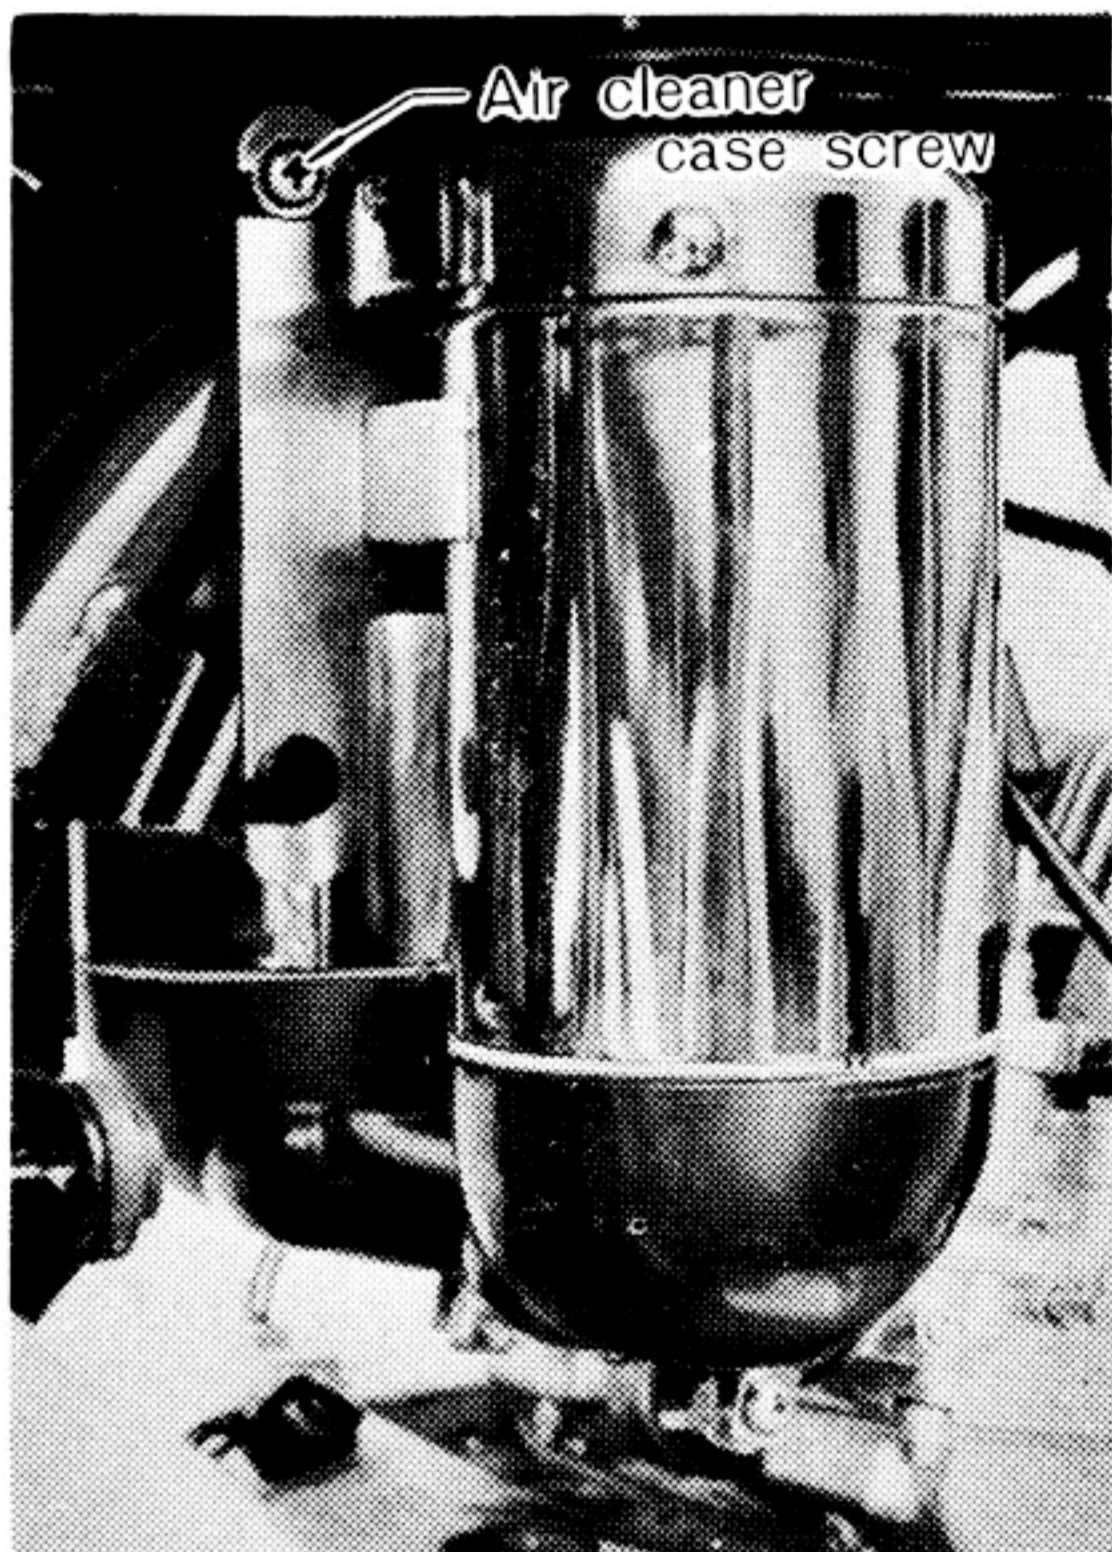

Cleaning

The air cleaner is a paper filter. Wash the filter in clean gasoline. Blow compressed air through it from the inside. Never wash the filter in water or oil. Use clean gasoline.

7 Adjusting the Carburetor

If the standard carburetor settings, which were done under rigid test conditions, are changed, it may result in poor performance.

Adjust the carburetor as follows:

a Idle


1. Tighten the right and left pilot air screws (1) all the way, then loosen them $1\frac{1}{2}$ turns.
2. With the engine running, turn the throttle adjusting screw (2). Adjust it to a position where the engine runs smoothly at low rpm.

NOTE: To decrease rpm, turn the screw clockwise.

To increase rpm, turn the screw counterclockwise.

3. The amount of exhaust from each muffler should be the same.

NOTE: The proper idle speed is between 1,100 and 1,300 rpm.

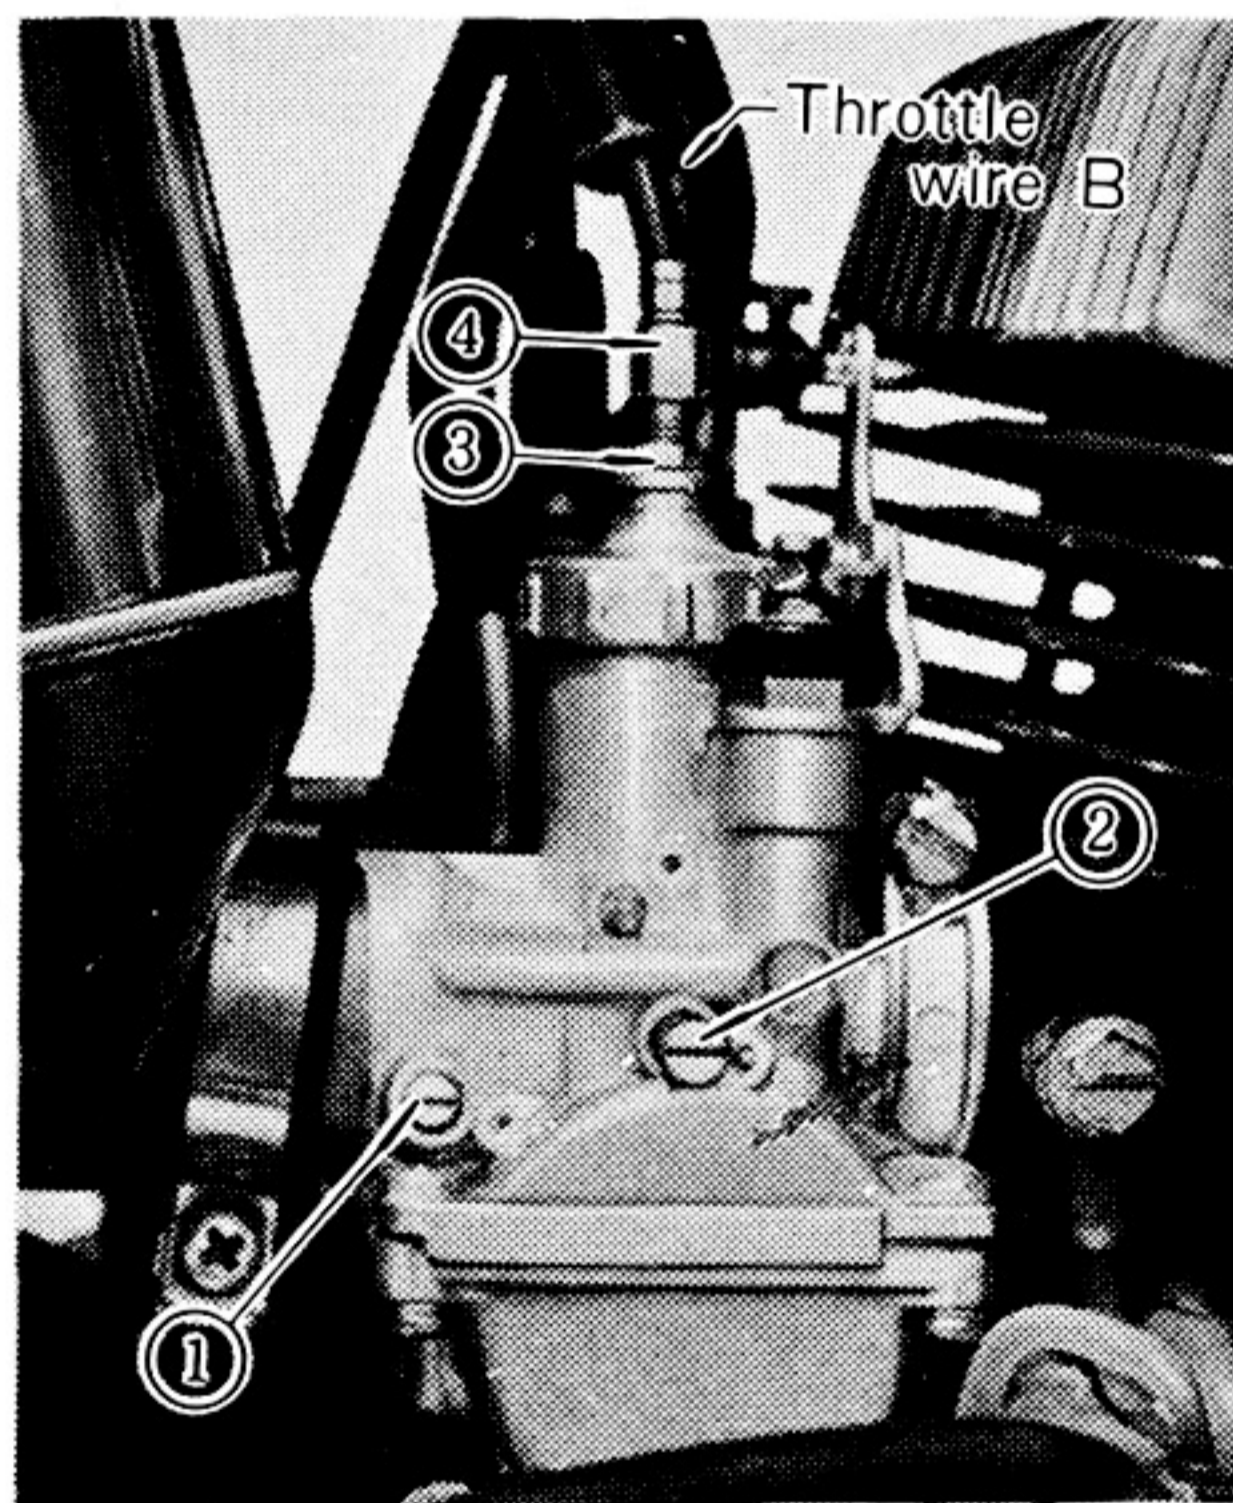

b Throttles

The right and left throttle slides should move simultaneously when the throttle is turned.




1. Turn the throttle wide open.
2. Loosen the cable adjuster locknut (3). Then turn the cable adjuster (4) just until there is no play.
3. After adjusting, tighten the locknut.

8 Drive Chain

The drive chain should have $\frac{1}{2}$ "— $\frac{5}{8}$ " (20 mm) of up and down play measured at the center of the lower section of the chain wheel on the ground. A dirty or dry chain will wear rapidly and damage the sprockets. Check the chain regularly to make sure that it is properly oiled and adjusted. It is wise to wash the chain off with gasoline before reoiling it.



Adjusting

- a Loosen the rear wheel nuts, (1) and (2), on either side of the wheel.
- b Adjust the chain by turning the chain adjusting bolts (3). The adjusting marks on each side should be in the same position.
- c When the chain is adjusted properly, tighten all the nuts (1), (2) and (4).

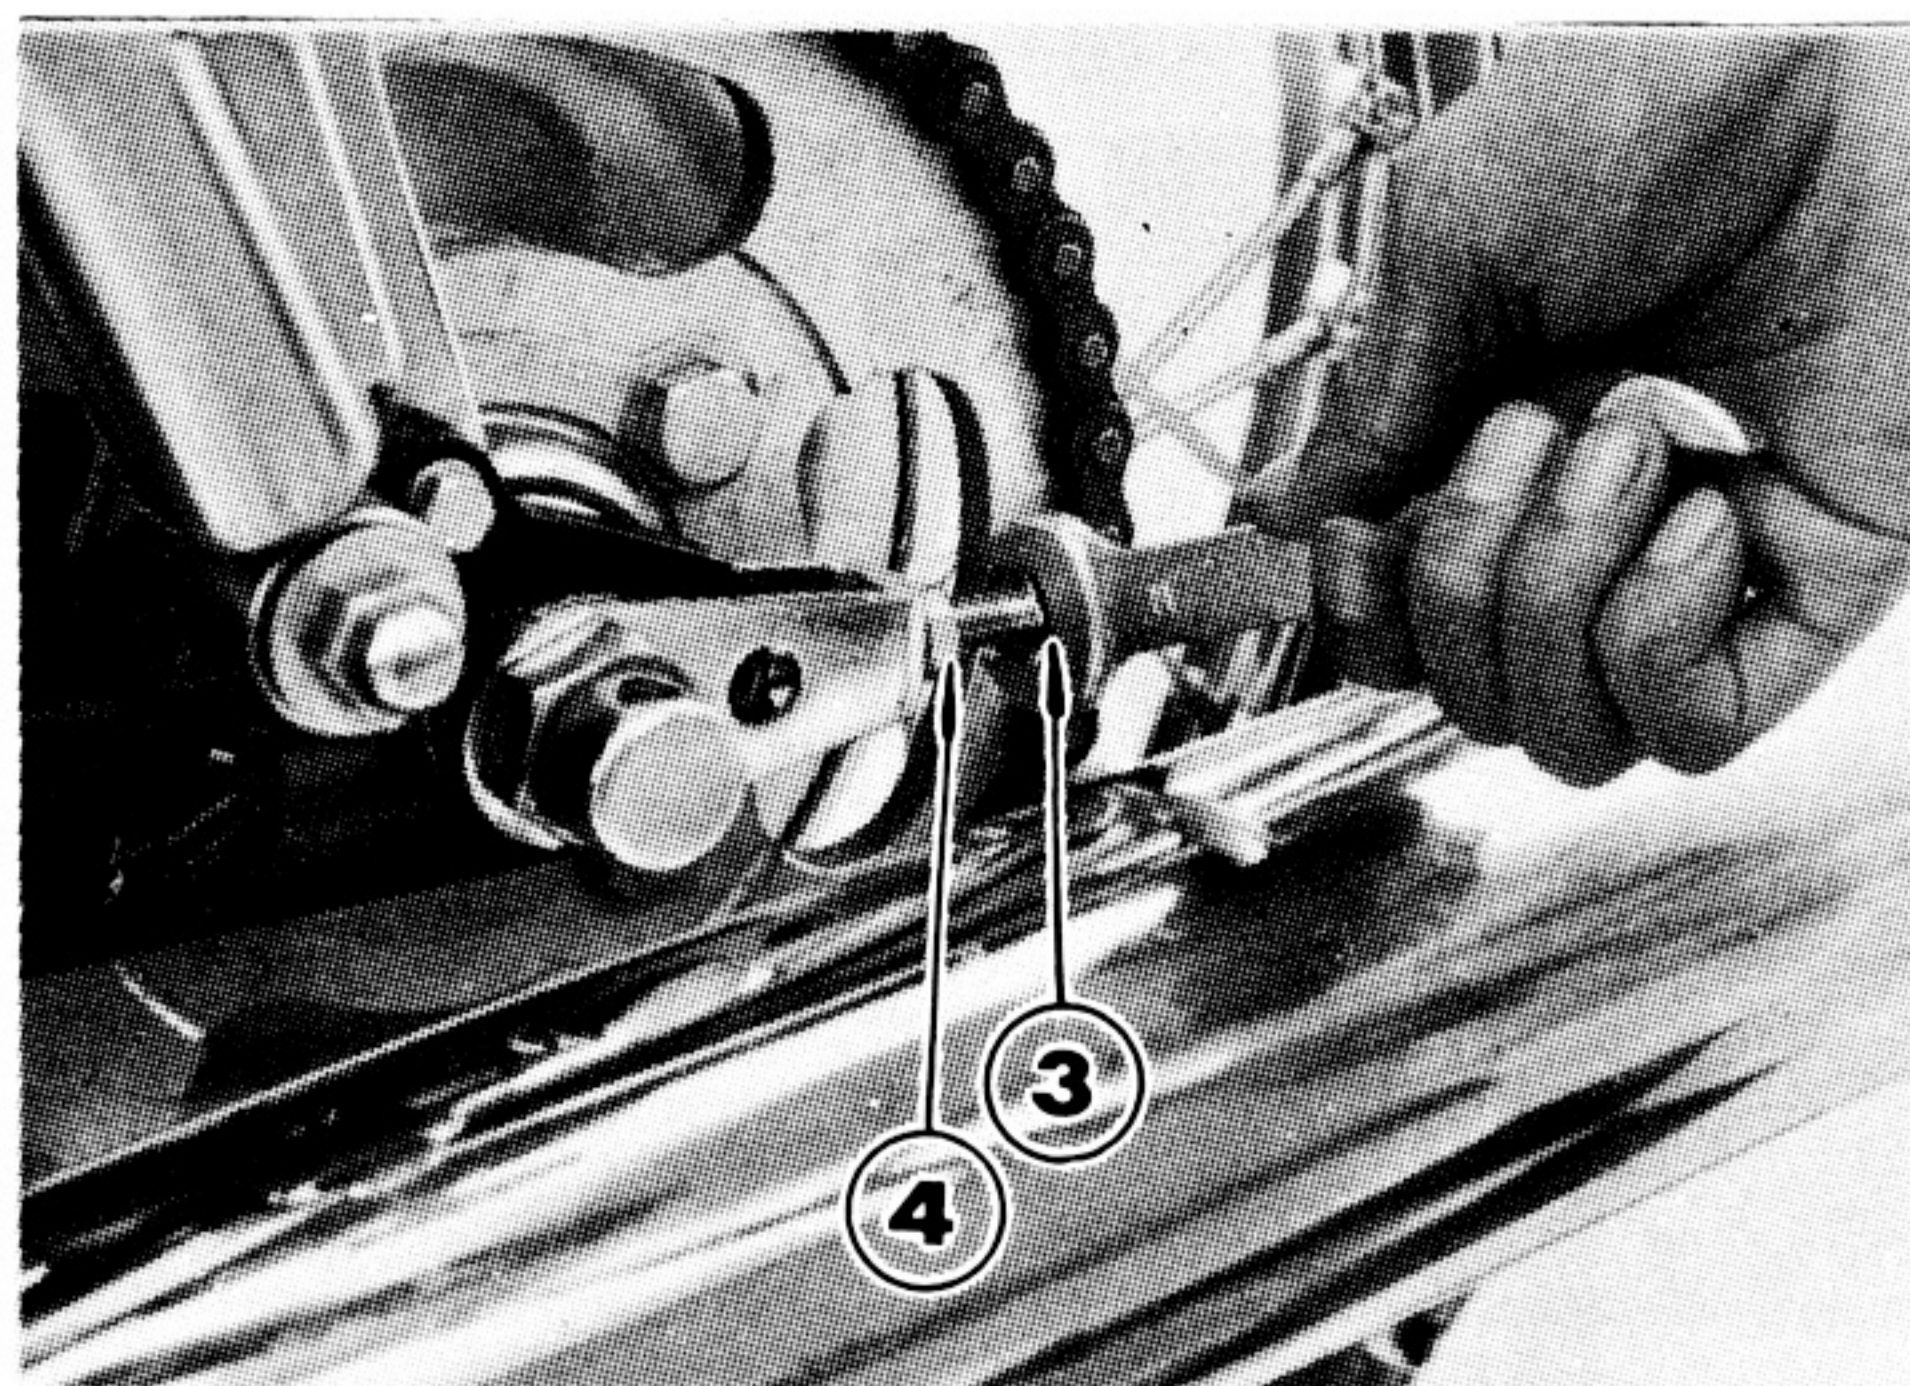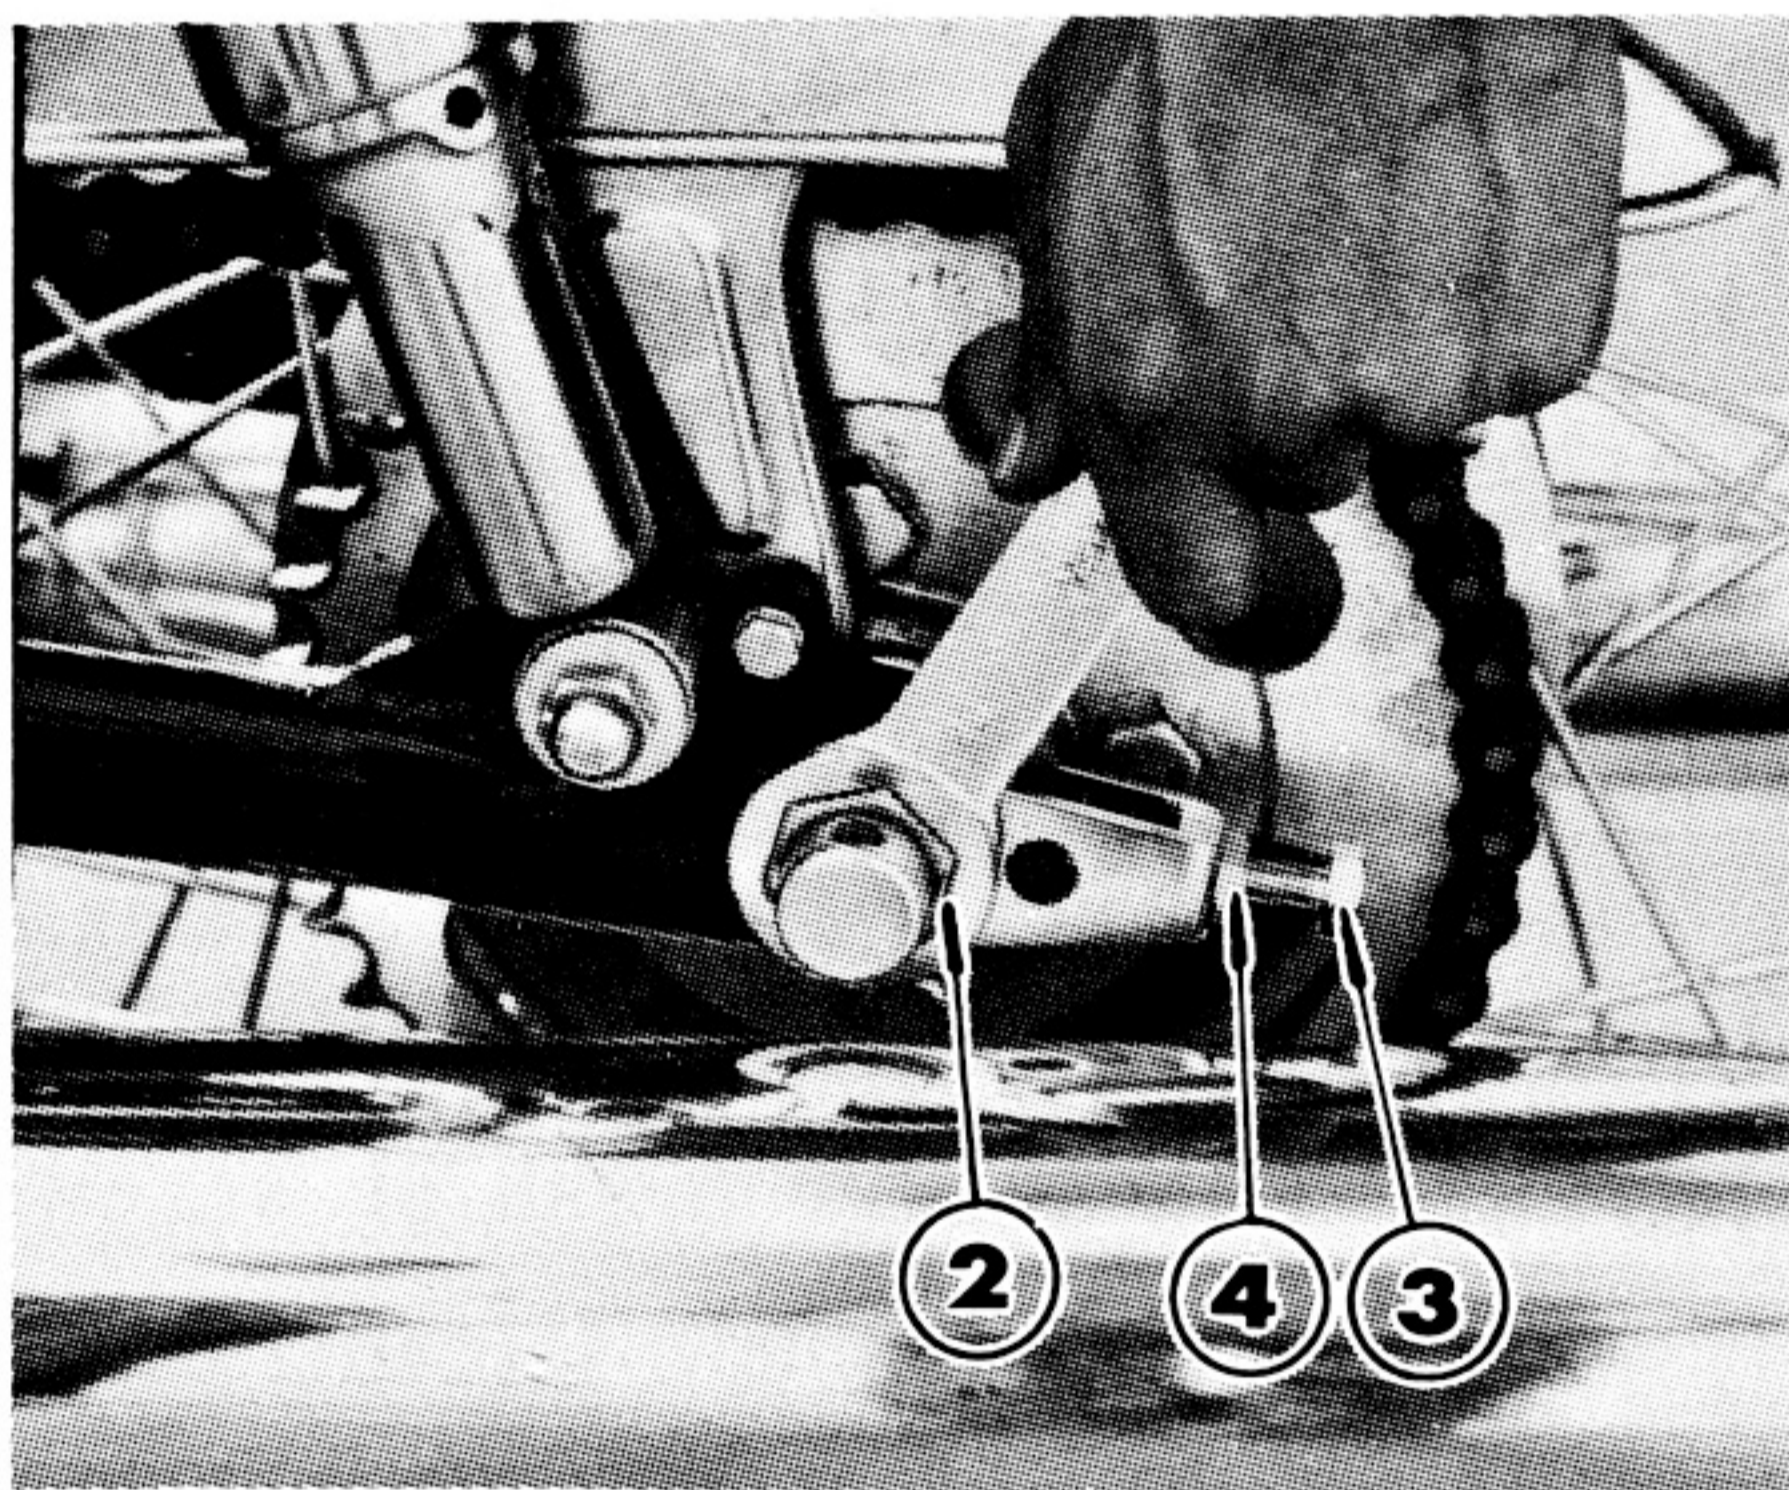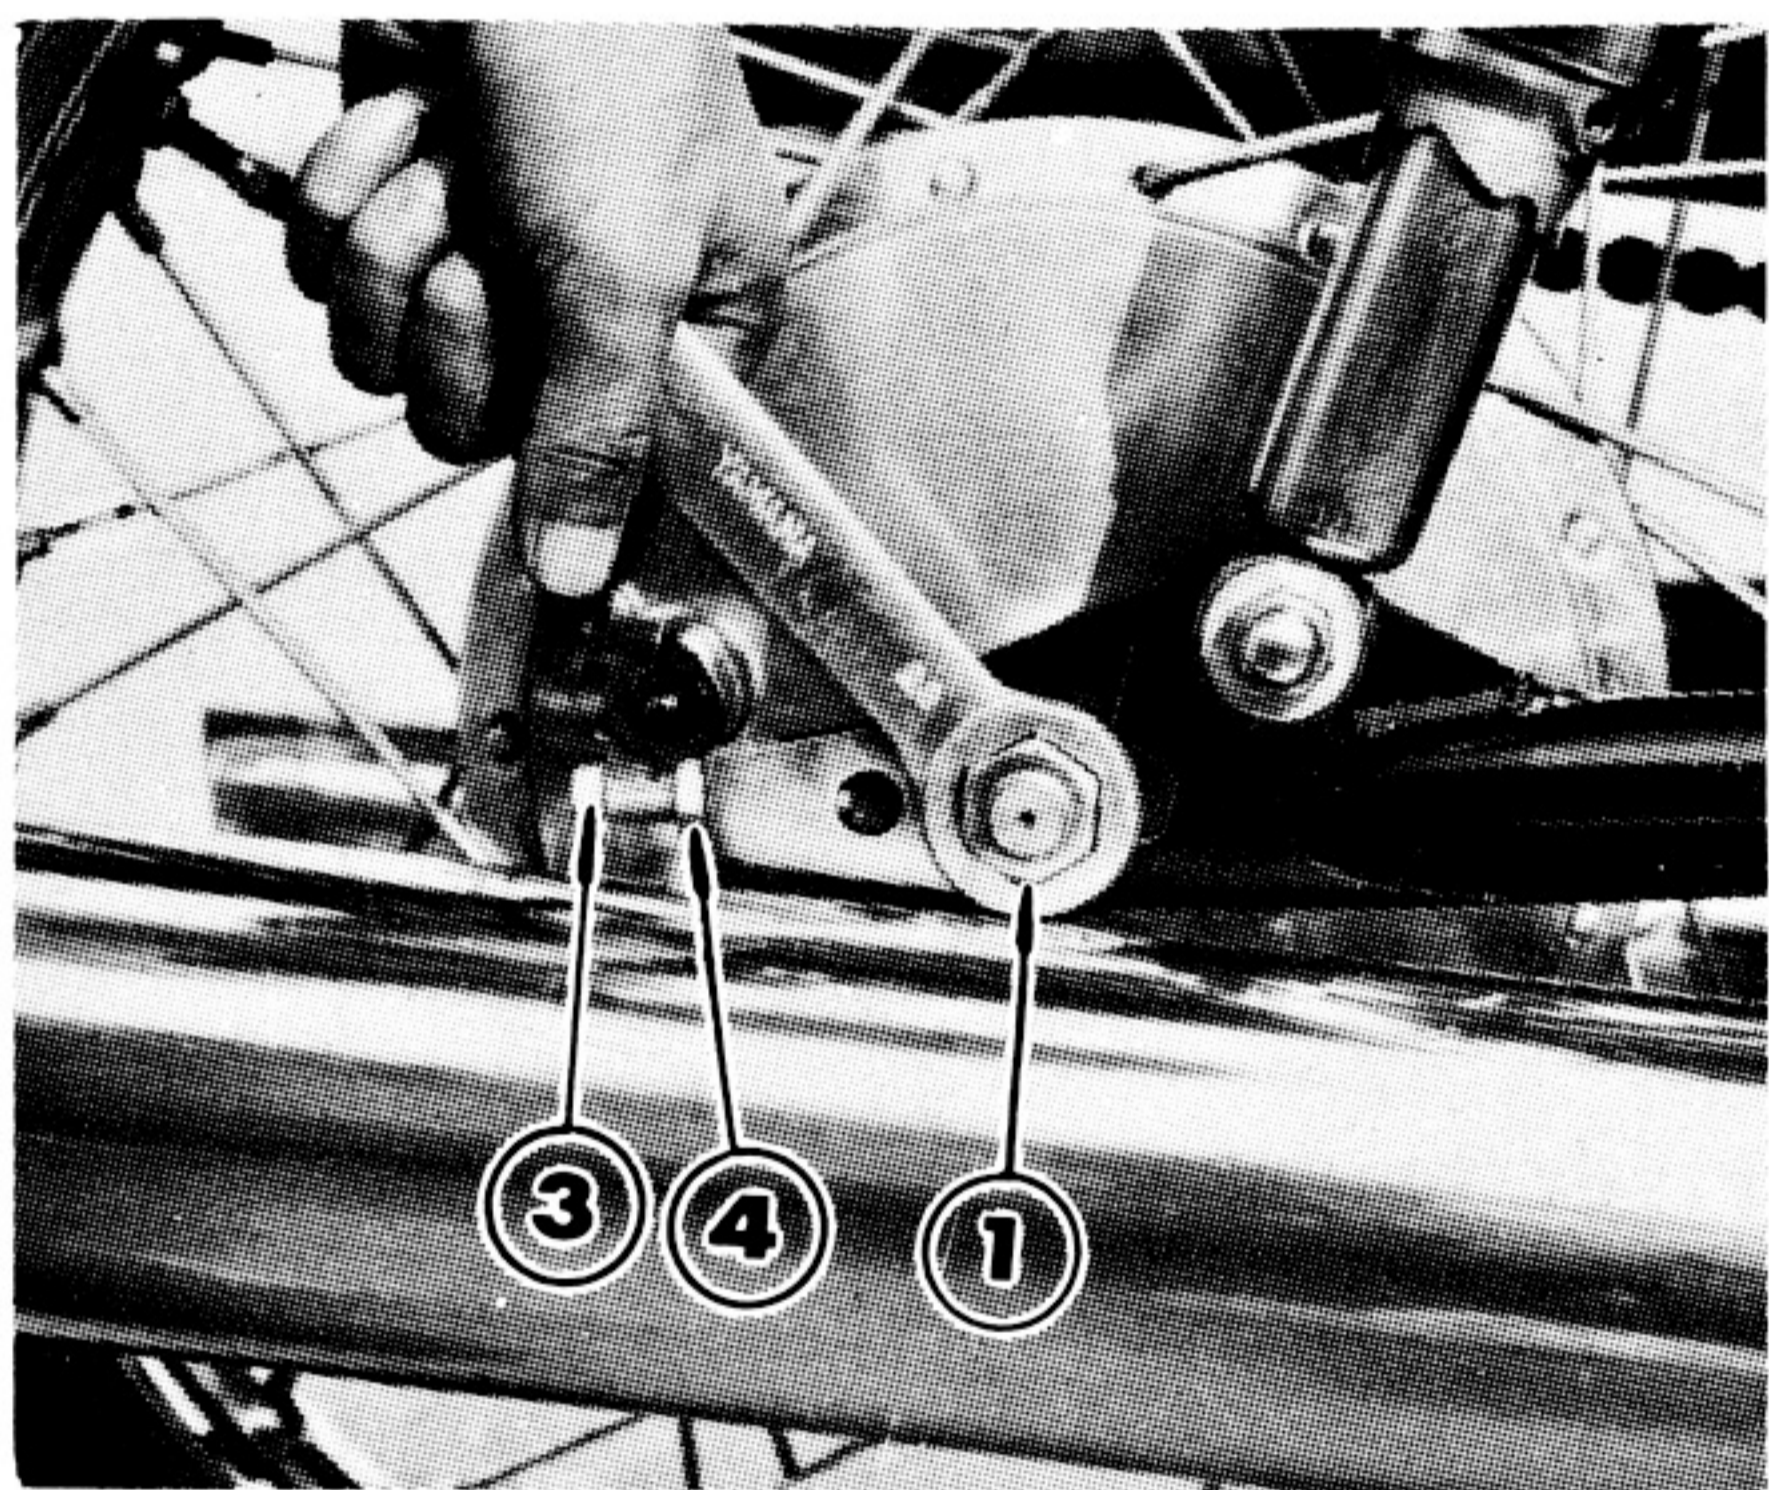

9 Cleaning the Muffler

To remove the inner cylinder from the muffler, remove the cylinder set screw and pull the cylinder out with pliers. Remove the carbon with a wire brush.

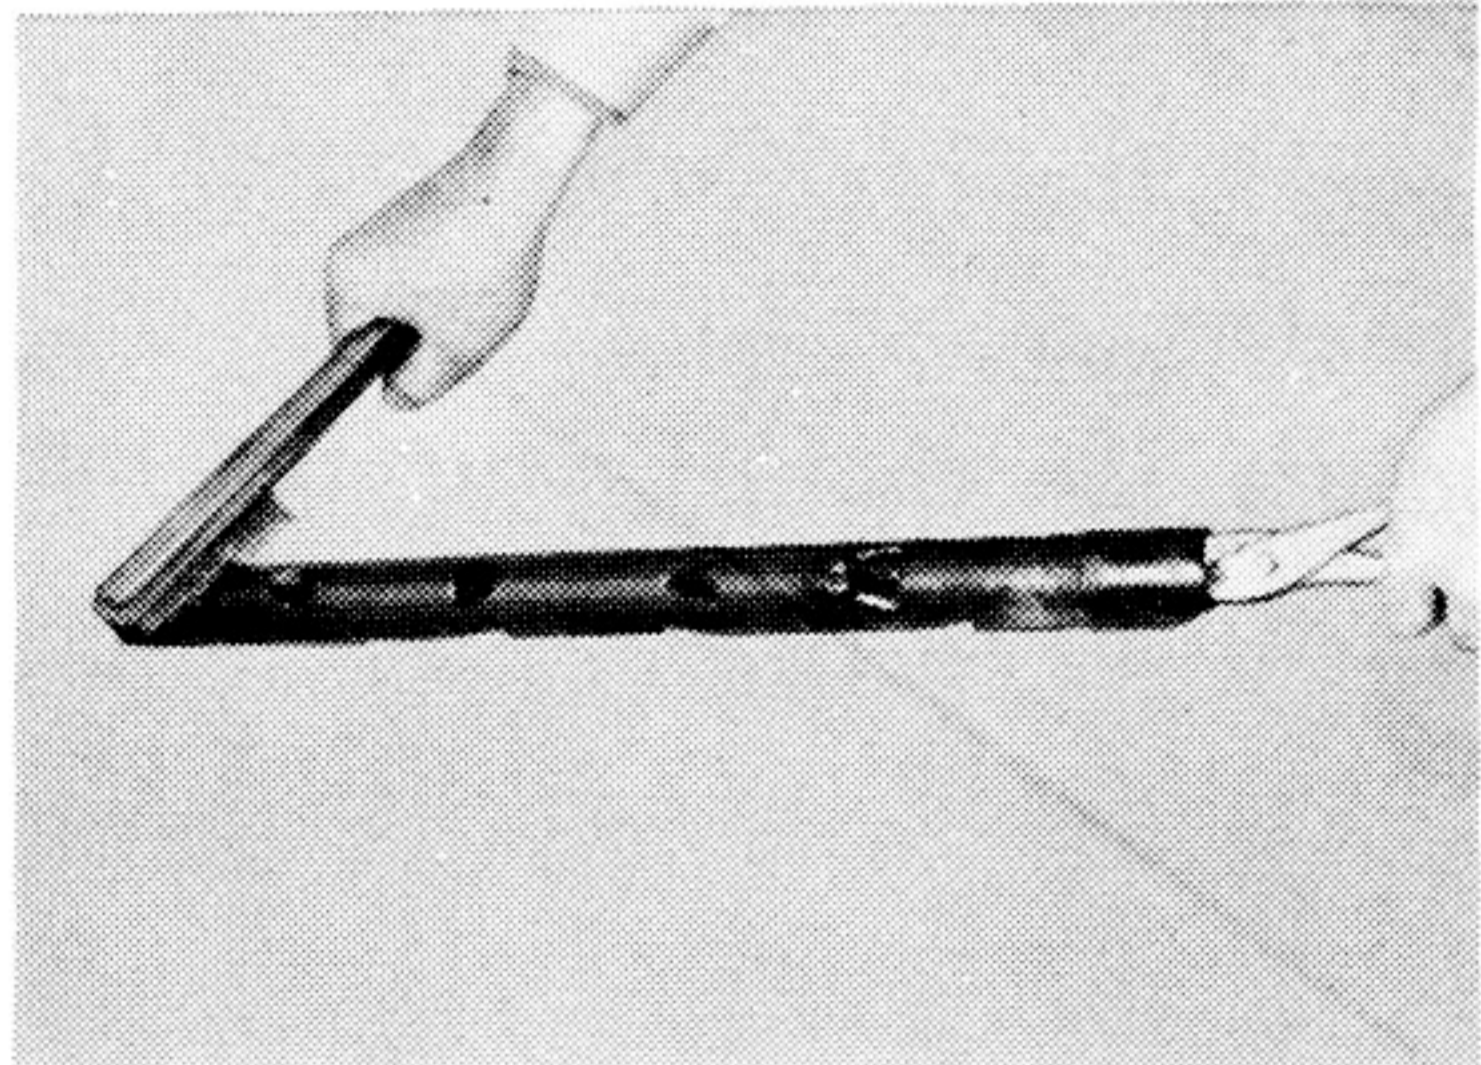
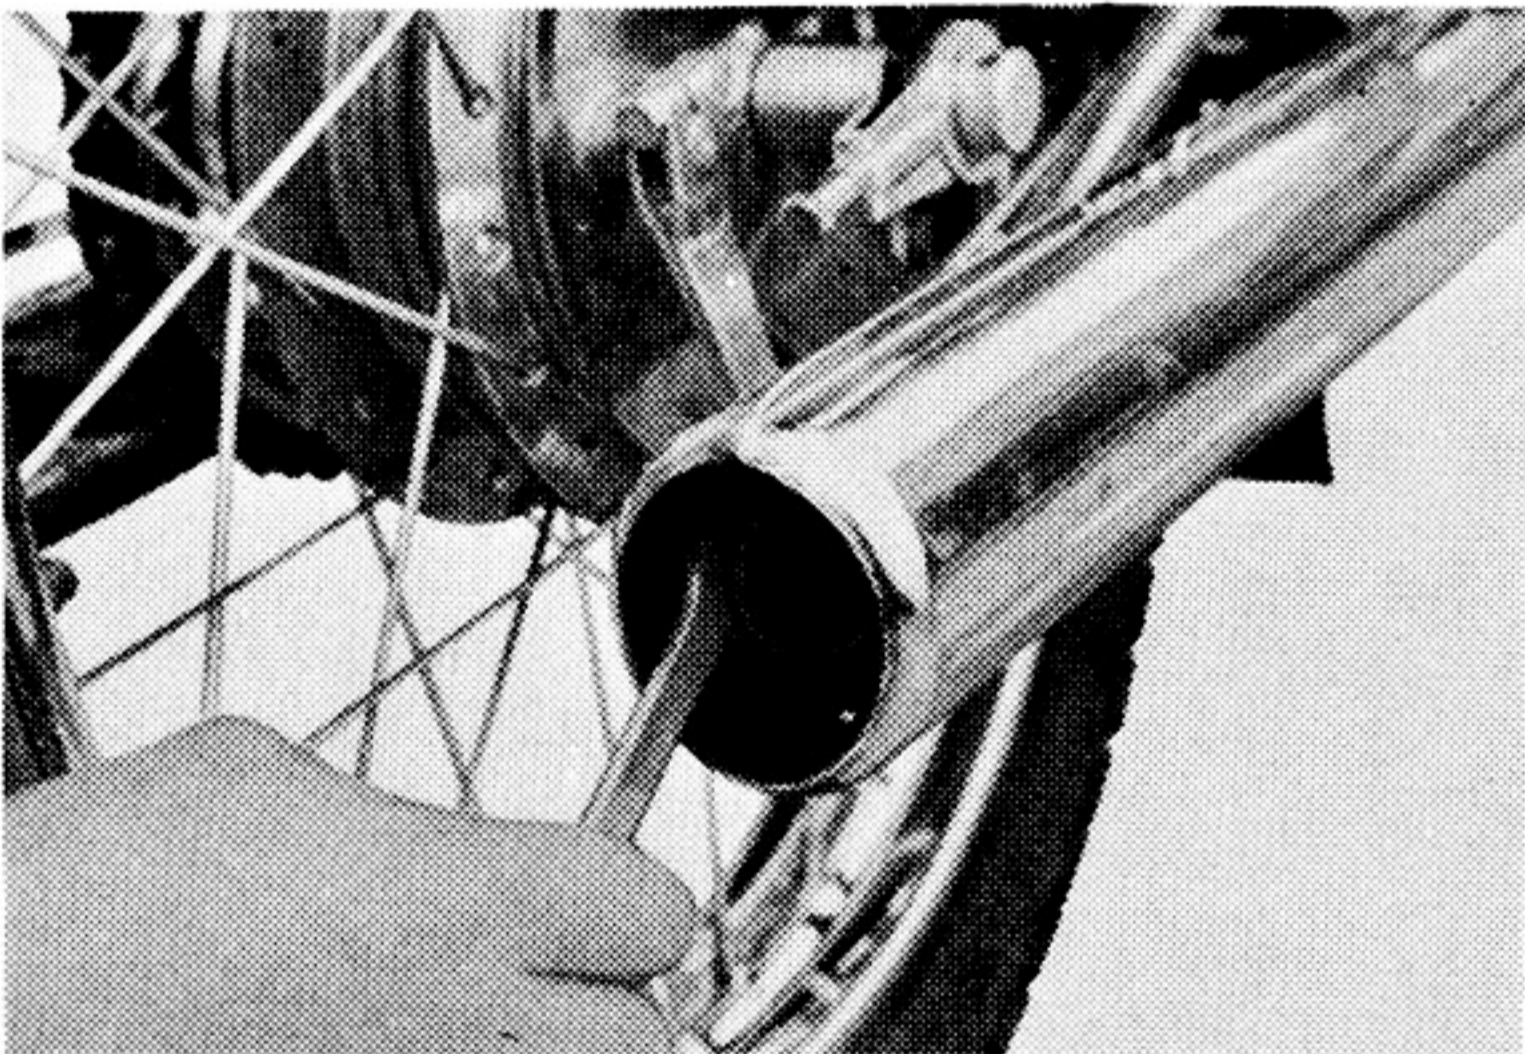


10 Cleaning the Cylinder Head and Piston

Carbon accumulation around the cylinder head and piston causes poor performance loss of power, overheating, piston slap and other problems.



- a Remove the cylinder head, and remove all carbon from the combustion chamber.
- b Remove all carbon from the piston crown.

NOTE: Use a wire brush or screwdriver being careful not to mark the aluminum. Clean the surfaces with gasoline.

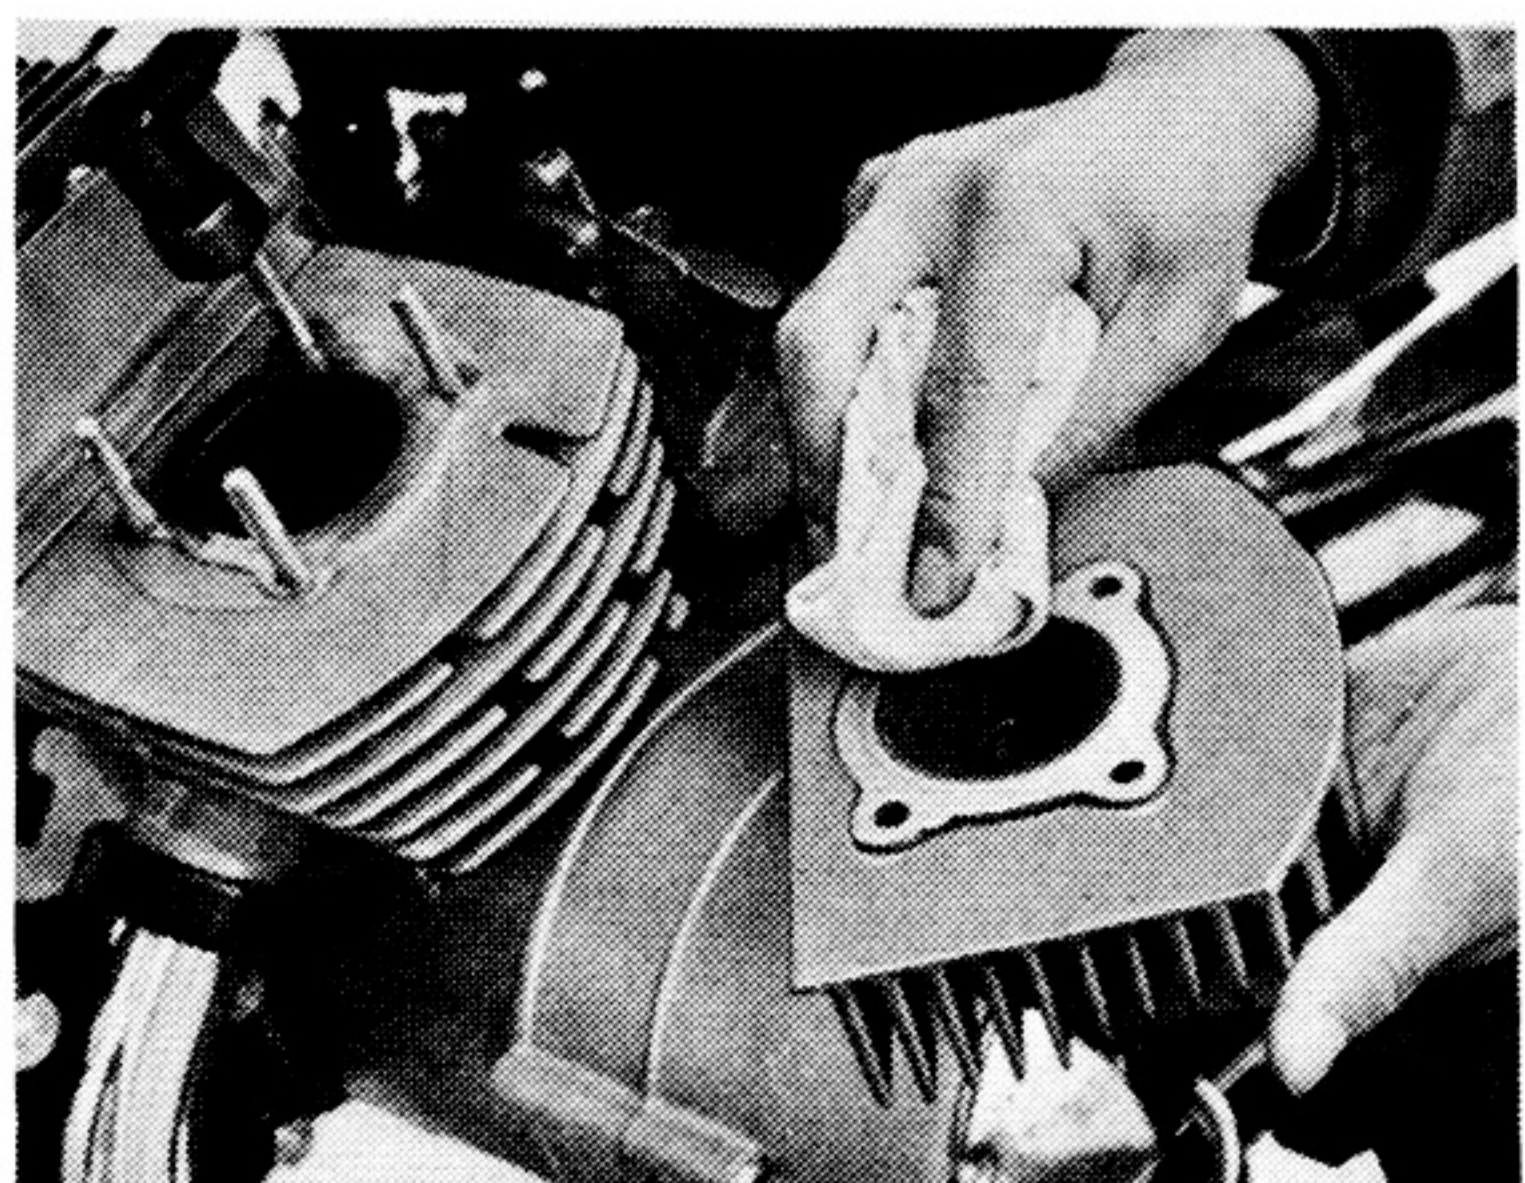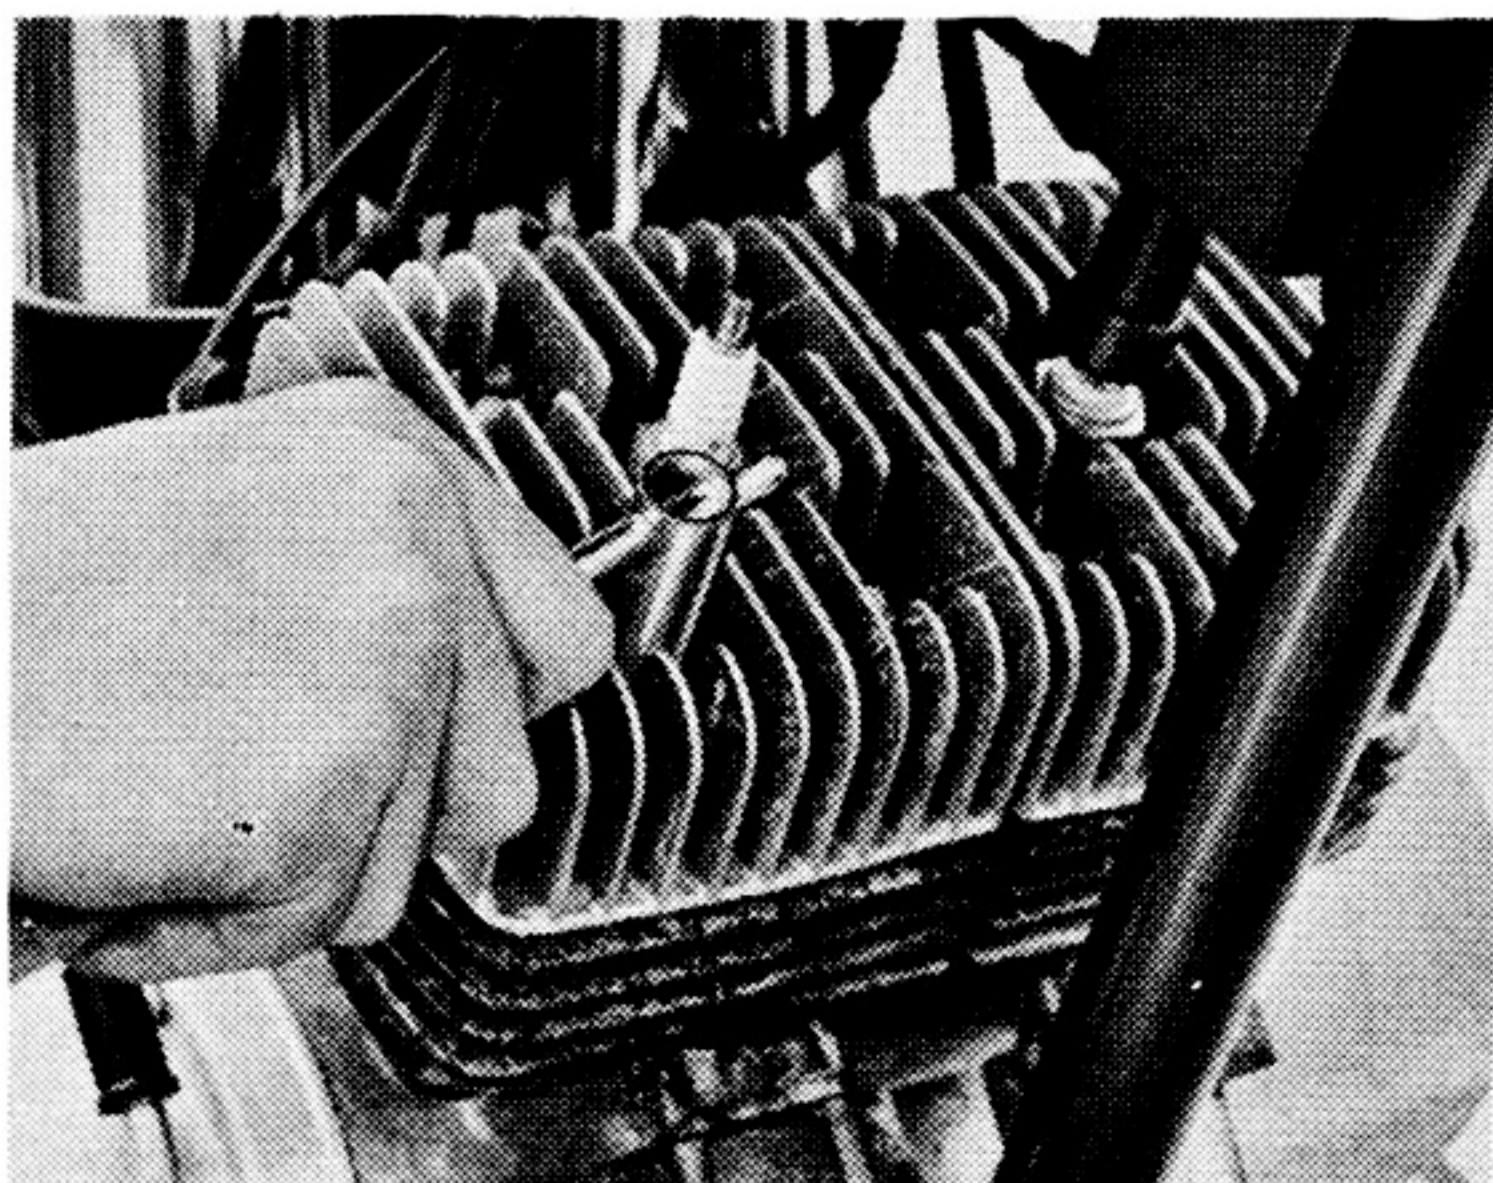

Cleaning the Fuel Cock Filter

The fuel cock filter removes impurities from the gasoline before it reaches the carburetors. A clogged filter will keep from fuel reaching the carbs. The filter must be cleaned from time to time. Remove the cup from the fuel cock and then the filter. Wash it carefully in gasoline.

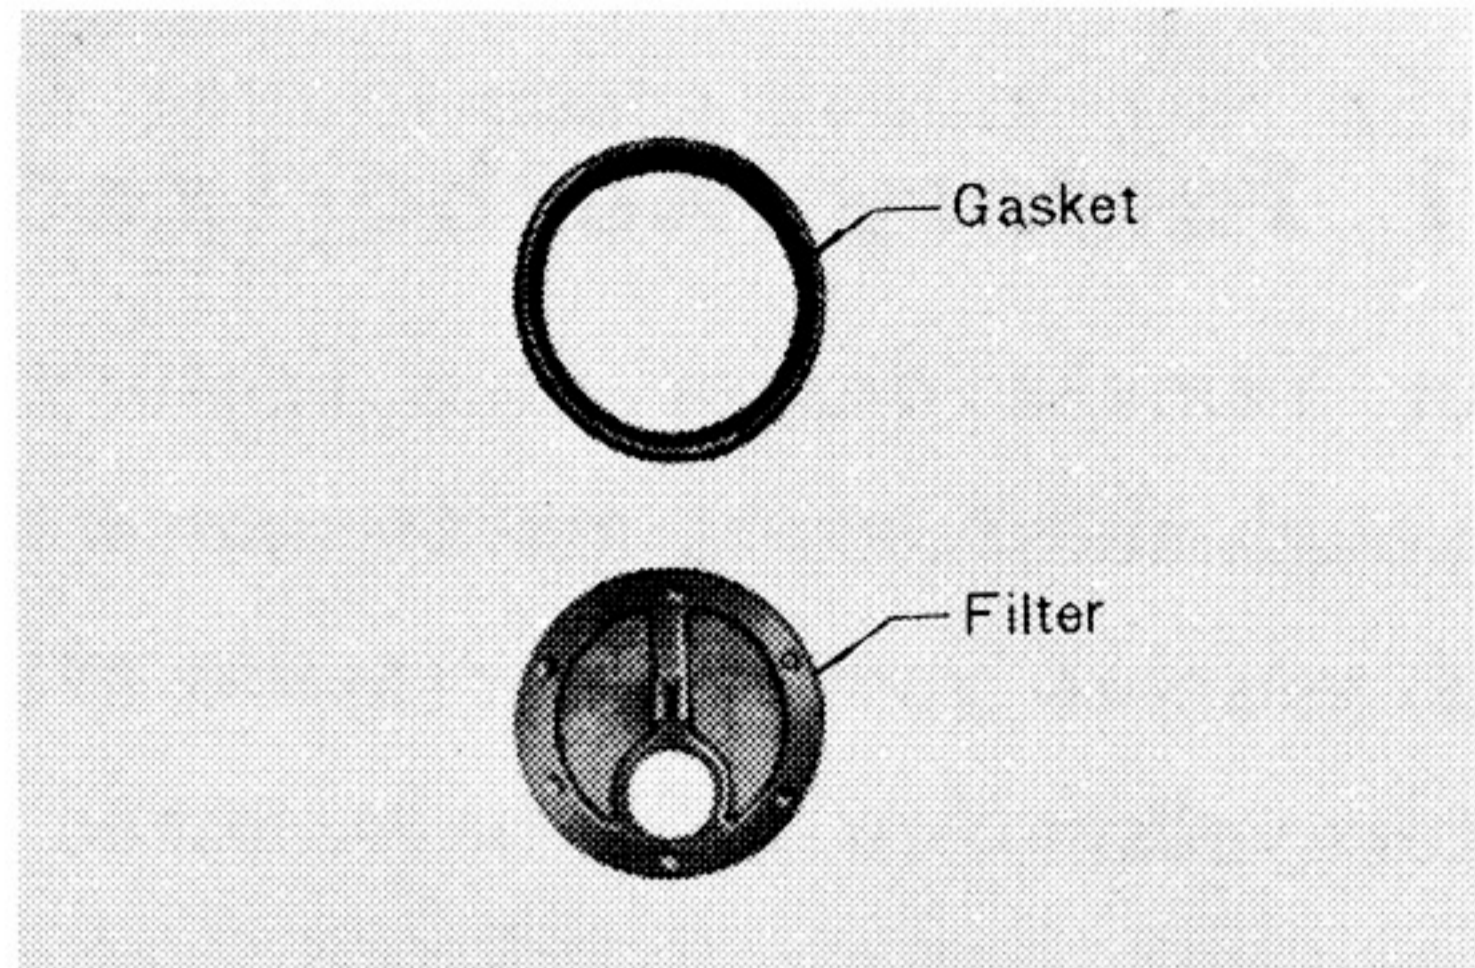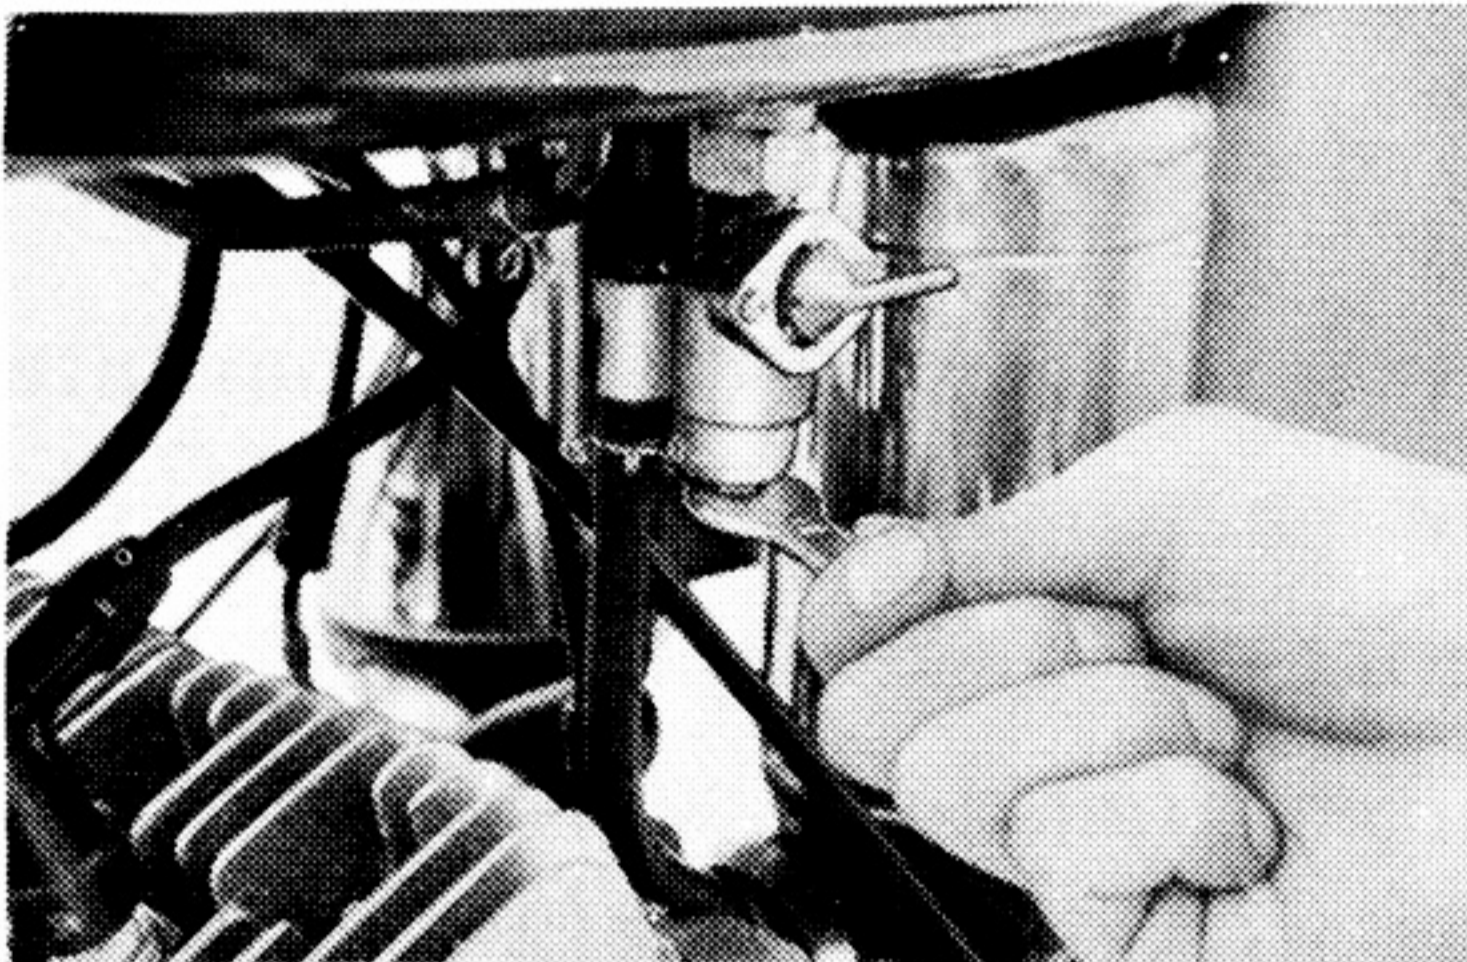

12 Nuts and Bolts

Go over your machine periodically checking to see that all hardware is secure. In particular check the following items.

- | | |
|--------------------|----------------------|
| Front & rear axles | Engine fittings |
| Foot rests | Carburetor |
| Swinging arm shaft | Air cleaner cover |
| Muffler | Brake linkage |
| Center stand | Exhaust ring nut |
| Side stand | Rear shock absorbers |

13 Greasing and oiling

	Parts to be lubricated	Distance driving at 1st lubr., miles	Lubrication interval, miles	Type of Lubricant
1	Front brake cam shaft	600	2,000	cup grease
2	Rear brake cam shaft	600	2,000	"
3	Front brake wire	600	2,000	"
4	Rear brake wire	600	2,000	"
5	Accelerator grip	600	2,000	"
6	Stand shaft	600	2,000	"
7	Brake linkage	600	2,000	"
8	Drive chain	300	600	motor oil
9	Gear oil	300	600	
10	Swinging arm shaft	600	2,000	cup grease

6 Repair and Troubleshooting Charts

6-1 Factory Authorized Service

Your Yamaha dealer is a factory trained mechanic who guarantees thorough and correct maintenance for your motorcycle. We recommend that you let your dealer make all repairs and adjustments on your motorcycle. You will be assured prompt and good service.

6-2 Genuine Yamaha Parts

Always use genuine Yamaha parts and not “substitute” brands. Yamaha parts are manufactured to meet the factory’s exacting standards of precision and quality.

6-3 If Something Should Go Wrong.....

The YAS1 undergoes rigid factory tests to assure you long and satisfactory performance. However, if something would go wrong with your machine, immediately ask your Yamaha dealer for advice. He is always glad to answer your questions.

IMPORTANT: Some components are sealed or cannot be disassembled. If repairs to such components are necessary go to your Yamaha dealer. Yamaha cannot be responsible for repairs and adjustments to such components.

NOTE: The inspection and maintenance of Auto Lube are the dealer's job.



6-4 Troubleshooting charts

I Engine does not start while kicking.

<p>1 a Empty gasoline tank b Closed fuel cock</p>	<p>Refill Open.</p>
<p>2 Incorrect usage of starter lever.</p>	<p>See Section 4-3-1.</p>
<p>3 Dirty or worn spark plug</p>	<p>If plug soots up with carbon, clean and blow dry, or replace.</p>
<p>4 There are sparks, but engine does not start.</p>	<p>Incorrect plug gap. See page 33.</p>
<p>5 No spark (To see if there is no spark, remove plug with high-tension lead in place; ground it to cylinder head, and then kick down crank pedal).</p>	<p>Replace. If plug is not defective, either ignition coil or point breaker is faulty. Have your dealer repair.</p>
<p>6 Fuel in carburetor is overflowing.</p>	<p>Inspect carburetor for overflowing. Have your dealer disassemble and clean.</p>

2 Engine overheats and speed is slow

1	Improper ignition timing	Have your dealer inspect.
2	Clogged bypass in carburetor	Have your dealer clean.
3	Loose carburetor fitting and/or cylinder head	Tighten
4	Dirty or clogged air cleaner	Clean.
5	Lack of oil in drive chain	Apply oil.
6	Carbon coated muffler	Clean. (See p.36)

If any troubles should occur, please consult with your Yamaha dealer. He is always glad to answer your questions.






YAMA

PARTS


MEMO

A series of horizontal dashed lines for writing.

125 YAS1 Circuit

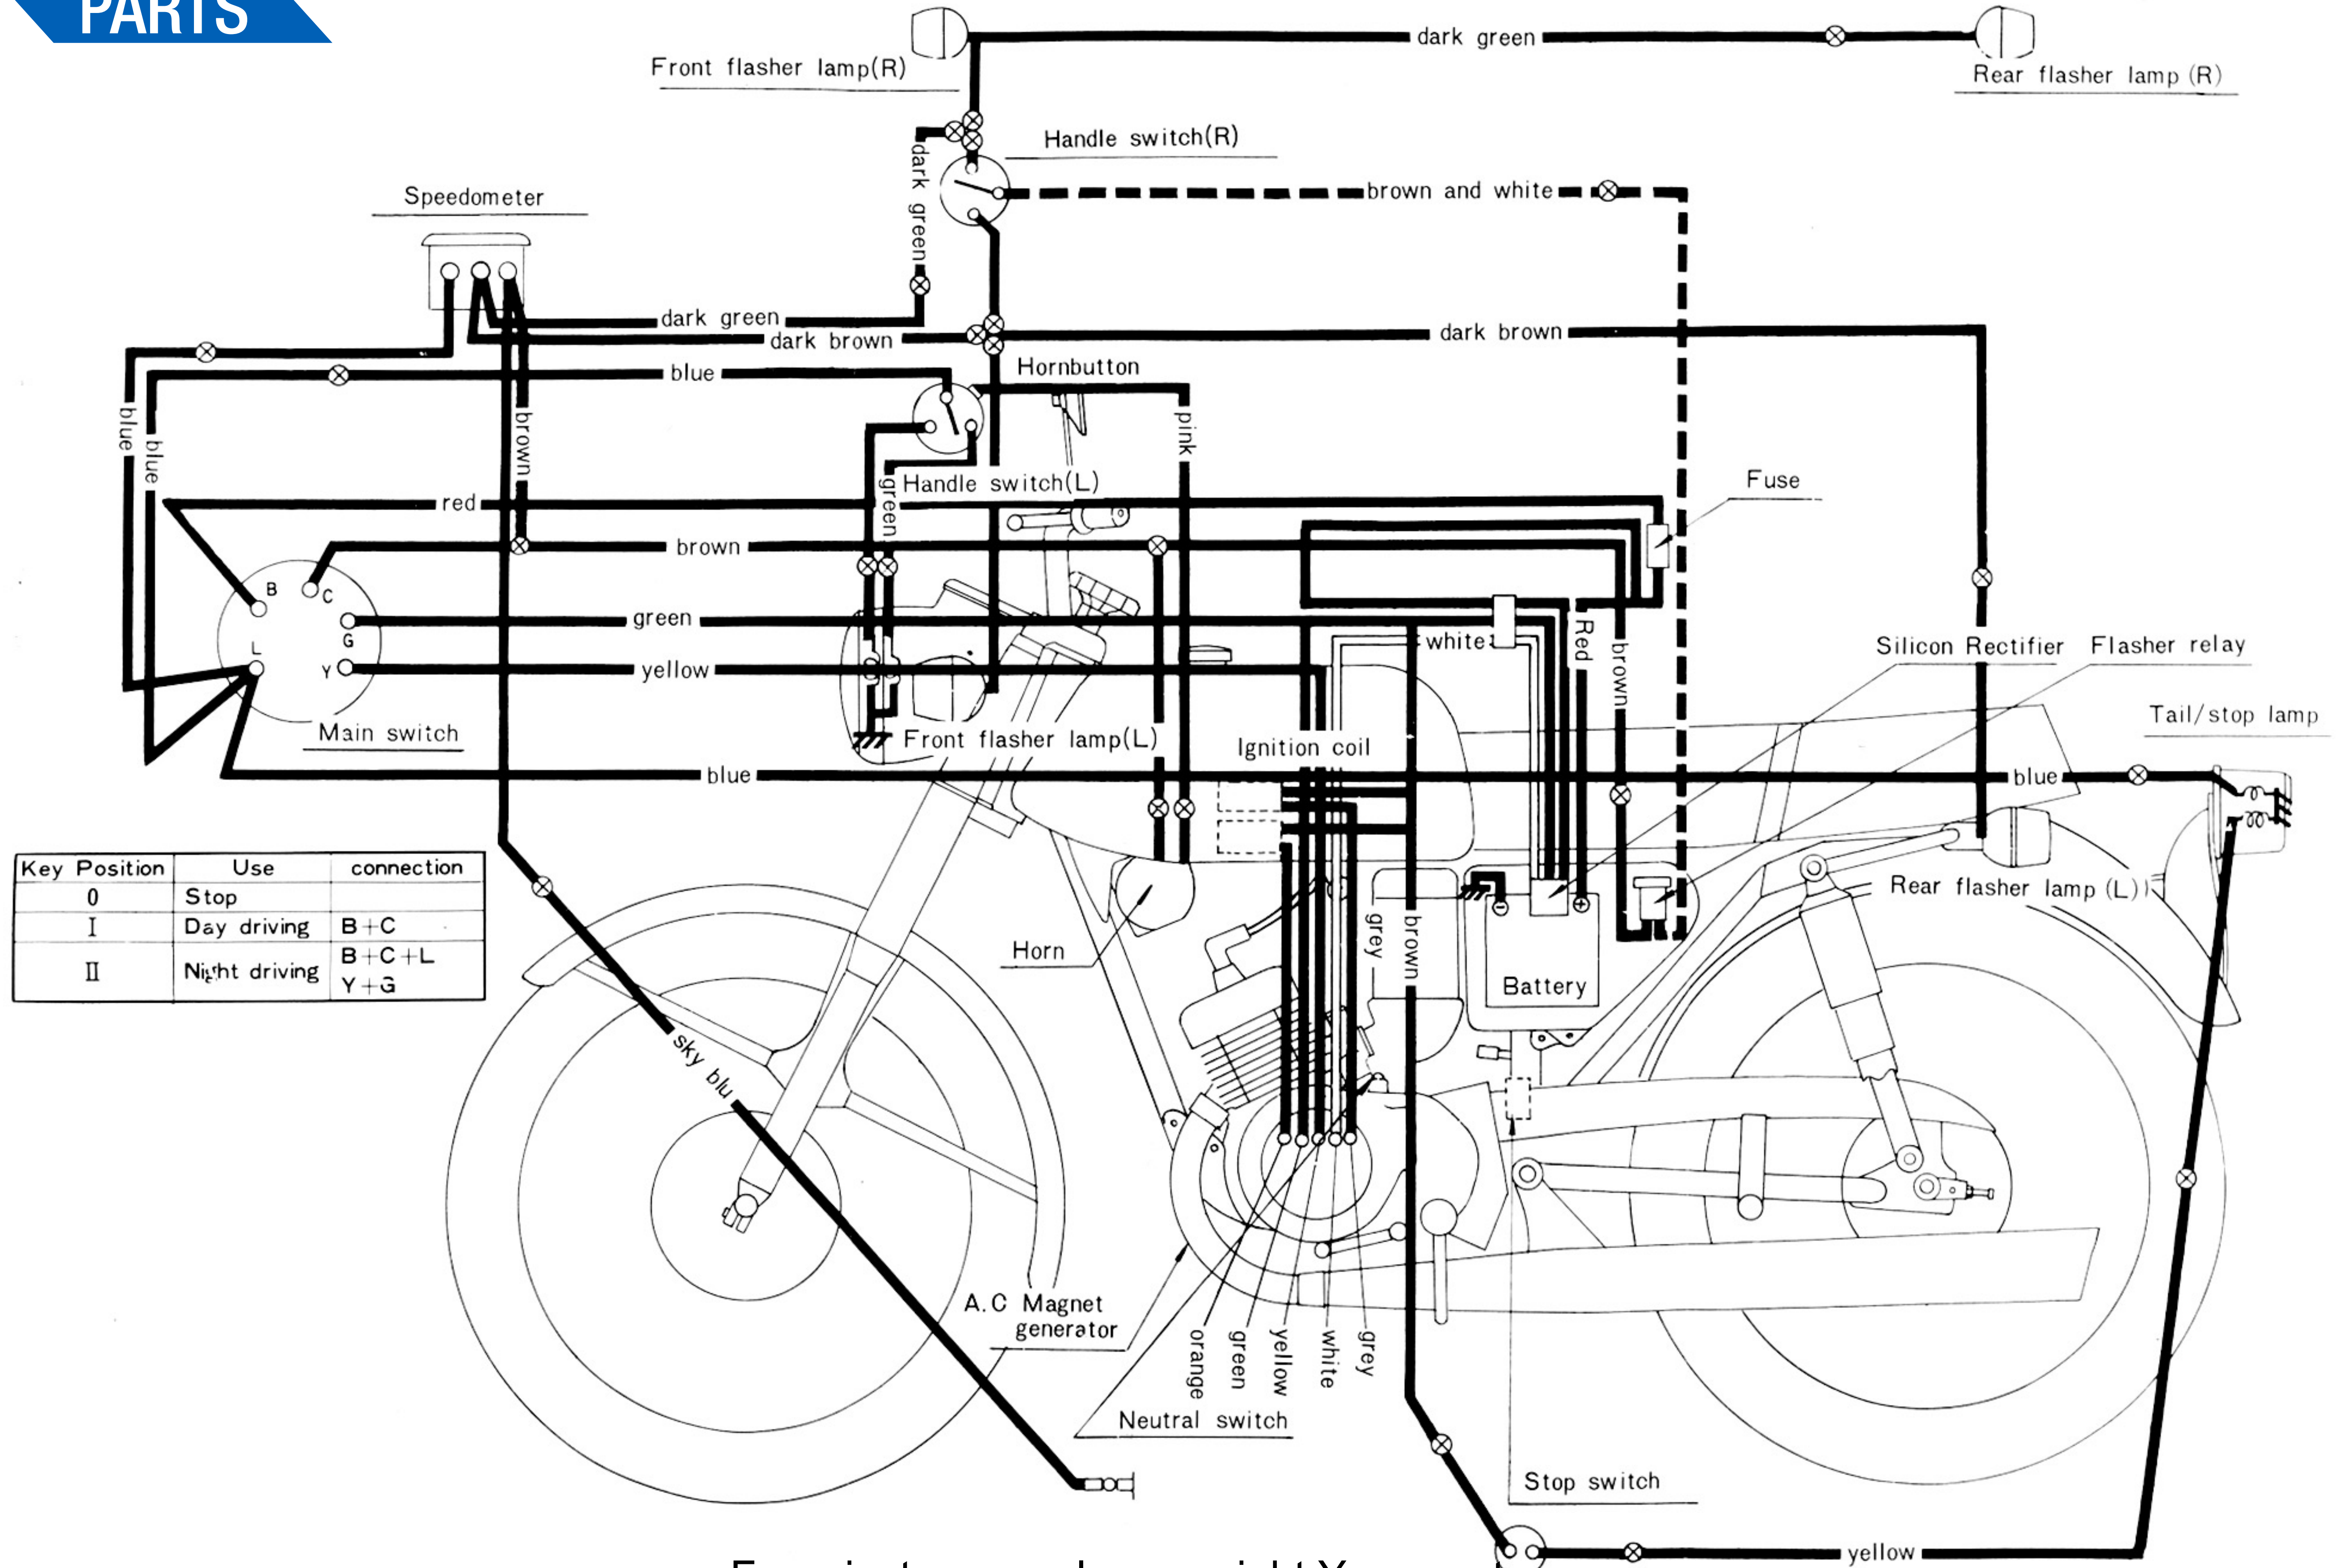

Key Position	Use	connection
0	Stop	
I	Day driving	B+C
II	Night driving	B+C+L Y+G

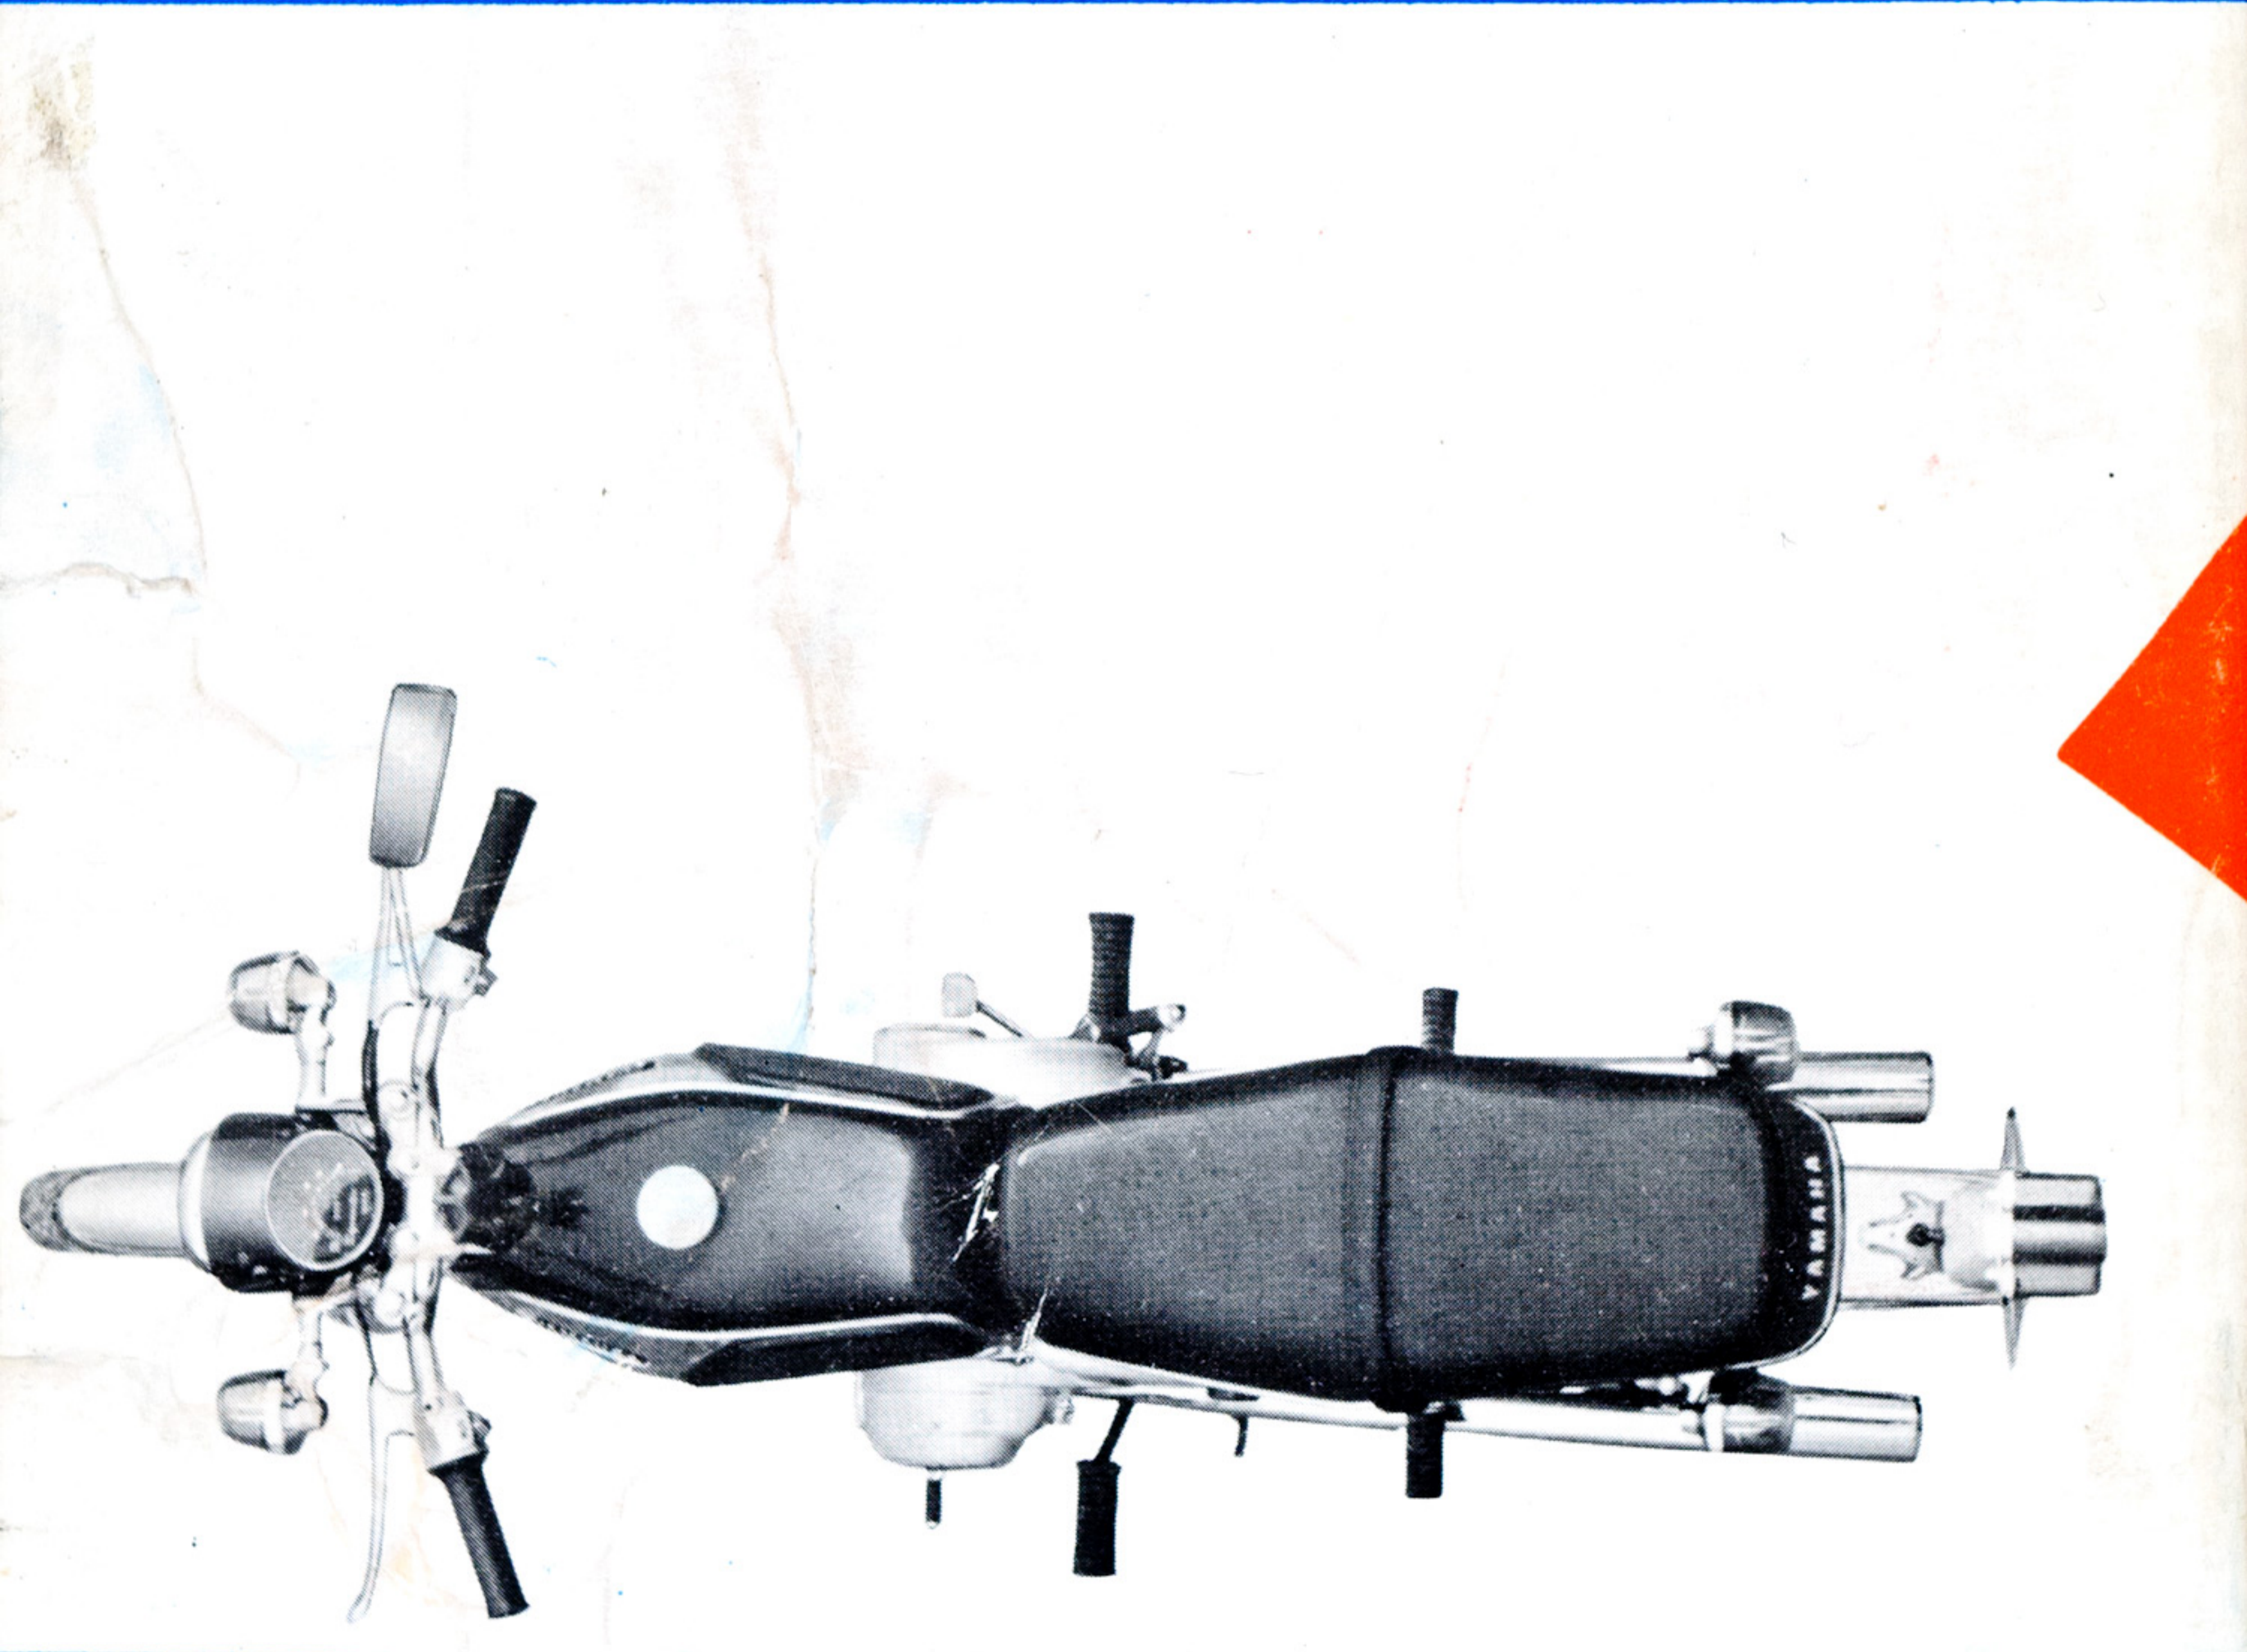

YAMAHA MOTOR CO., LTD.
PRINTED IN JAPAN